

# spinlock

BE ADVENTURE-PROOF

Certified



Corporation

CONTROL

PROTECT

SENSE

# WELCOME TO THE TRADE GUIDE

Spinlock continue to invest in new products and developing our existing ranges to ensure our customers have the best equipment for their on water experiences, both for work and play. We also continue to invest in ourselves to ensure you get the best possible service, increasing efficiency, speed of production and enabling us to continue to proudly make our products in Cowes. Our online services continue to develop - Please ask to use our B2B Wholesale System which ensures you can access Spinlock and your account features 24/7.



Spinlock Limited quality management system is accredited to: EN ISO9001:2015

CONTROL	
6-7	Rope Holding Comparison Chart
8	PXR Cam Cleat
10	XAS Powerclutch
12	XTS Powerclutch
13	XCS Powerclutch
15	XTX Powerclutch
16	XTR Powerclutch
17	ZR Jammer
18	XX Series - XXA , XXB & XXC Powerclutch
20	ZXB Jammer <b>NEW</b>
21	ZS Alloy Powerjammer
22	ZS Carbon Powerjammer
23	ZS-RLB Remote Release ZS Open Powerjammer PD Carbon Padeyes
24	TSR Fully Customisable Organiser
26	TSR Organiser
27	TSR Low Organiser
28	TWR Sheave Range TWF Winchfeeder
29	T25 Organiser BE10 Multiple Bullseye
30	T38, T50 & TC50 Organisers
33	EAC Carbon Tiller Extension
34	EA & EJ Tiller Extension
36	EJB Tiller Extension
37	WL Line Leads BE Bullseye
38	BRS Spinnaker Block SUA Mini Jammer
39	RF Sail Feeder ATCU Throttle Control

PROTECT	
52	Lifejacket Comparison Chart
54	Deckvest 6D
58	Deckvest VITO
59	Harness Release System
61	Deckvest LITE
63	Deckvest LITE+
65	Deckvest LITE USCG <b>NEW</b>
68	Deckvest NEMO+
72	Deckvest CENTO
75	ALTO Belt Pack
75	ALTO USCG <b>NEW</b>
76	ALTO Throw Holder <b>NEW</b>
77	Waterproof Pack Range <b>NEW</b>
81	Essentials Pack Range
82	AERO-PRO
83	WING & FOIL PFD
84	AIS MOB1 Beacon PLB3
85	Lume-On™ Pylon™
86	Performance Kneepads
87	Performance Safety Lines
89	Deck Pro
90	Mast Pro
94	Pro-Tech
95	DURO SOLAS
96	DURO SOLAS+ <b>NEW</b>
101	DURO <b>NEW</b>
103	DURO+ <b>NEW</b>

SENSE	
96	Load-Sense
98	Rig-Sense
100	Sail-Sense
102	SENSE Apps
CONTROL SUPPORT	
40	Upgrades & Spares
42	Weights & Fasteners
45	Dimensions
PROTECT SUPPORT	
104	Upgrades & Spares
106	Lifejacket Inflation Systems
107	PROTECT Size Guides & Weights
SENSE SUPPORT	
110	SENSE: See online resources <a href="http://www.spinlock.co.uk/sense">www.spinlock.co.uk/sense</a>
MARKETING	
116	Marketing Materials Menu
118	PROTECT Retail Displays
118	CONTROL & PROTECT Displays & Retail Shelves
122	Media Portal

Being B-Corp means adhering to the highest standards of social and environmental performance, transparency and accountability. We take a more rigorous approach to business decisions by focusing on people and the planet, in addition to profit.

Certified B Corporations are leaders of a global movement of people using business as a force for good and redefine success in business. By voluntarily meeting higher standards of transparency, accountability, and performance, Certified B Corps are distinguishing themselves in a cluttered marketplace by offering a positive vision of a better way to do business.



**CONTROL**  
ENHANCING PERFORMANCE

# ROPE HOLDING COMPARISON CHART

## CLEATS - HANDLE RELEASE

PRODUCT	MODEL	LINE DIA	MWL AT MAX LINE DIAMETER	MULTIPLES AVAILABLE	COLOUR	CERAMIC COATED PARTS	SIDE-MOUNT VERSION	LOCK OPEN VERSION	REMOTE OP	WEIGHT (STANDARD MODEL EXC FASTENERS)	FASTENERS	FASTENER HEAD TYPE	SUPPLIED
PXR	PXR0206	2-6mm (3/32-1/4")	140kg (308lbs)	-	●	-	-	-	-	43g (1.5oz)	2 x M4 (5/32")	CSK Head	-
	PXR0810	8-10mm (5/16-3/8")	200kg (440lbs)	-	●	-	-	-	-	84g (2.9oz)	2 x M5 (3/16")	CSK Head	-
	PXR0206/SW	2-6mm (3/32-1/4")	140kg (308lbs)	-	●	-	-	-	-	77g (2.7oz)	3 x M5 (3/16")	CSK Head	-
	PXR0810/SW	8-10mm (5/16-3/8")	200kg (440lbs)	-	●	-	-	-	-	124g (4.3oz)	3 x M5 (3/16")	CSK Head	-
	PXR0206/VP	2-6mm (3/32-1/4")	140kg (308lbs)	-	●	-	-	-	-	97g (3.4oz)	Bracket mount	Pan Head or Rivet	-
	PXR0206/T	2-6mm (3/32-1/4")	140kg (308lbs)	-	●	-	-	-	-	53g (1.9oz)	2 x M4 (5/32")	CSK Head	-
	PXR0810/T	8-10mm (5/16-3/8")	200kg (440lbs)	-	●	-	-	-	-	101g (3.5oz)	2 x M5 (3/16")	CSK Head	-

## CLUTCHES - HANDLE RELEASE



PRODUCT	MODEL	LINE DIA	MWL AT MAX LINE DIAMETER	MULTIPLES AVAILABLE	COLOUR	CERAMIC COATED PARTS	SIDE-MOUNT VERSION	LOCK OPEN VERSION	REMOTE OP	WEIGHT (STANDARD MODEL EXC FASTENERS)	FASTENERS	FASTENER HEAD TYPE	SUPPLIED
XAS	XAS0408/1	4-8mm (5/32-5/16")	450kg (990lbs)	✓	●	-	✓	-	-	270g (9.5oz)	2 x M6 (1/4")	CSK Head	-
	XAS0408/2	4-8mm (5/32-5/16")	450kg (990lbs)	✓	●	-	-	-	-	500g (17.5oz)	4 x M6 (1/4")	CSK Head	-
	XAS0408/3	4-8mm (5/32-5/16")	450kg (990lbs)	✓	●	-	-	-	-	680g (23.8oz)	6 x M6 (1/4")	CSK Head	-
	XAS0612/1	6-12mm (5/32-1/2")	575kg (1270lbs)	✓	●	-	✓	-	-	270g (9.5oz)	2 x M6 (1/4")	CSK Head	-
	XAS0612/2	6-12mm (5/32-1/2")	575kg (1270lbs)	✓	●	-	-	-	-	500g (17.5oz)	4 x M6 (1/4")	CSK Head	-
	XAS0612/3	6-12mm (5/32-1/2")	575kg (1270lbs)	✓	●	-	-	-	-	680g (23.8oz)	6 x M6 (1/4")	CSK Head	-
XTS	XTS0610/1	6-10mm (1/4-3/8")	700kg (1543lbs)	✓	●	✓	✓	✓	-	545g (19.1oz)	2 x M8 (5/16")	CSK Head	-
	XTS0610/2	6-10mm (1/4-3/8")	700kg (1543lbs)	✓	●	✓	-	✓	-	1030g (36.33 oz)	4 x M8 (5/16")	CSK Head	-
	XTS0610/3	6-10mm (1/4-3/8")	700kg (1543lbs)	✓	●	✓	-	✓	-	1500g 952.90oz	6x M8 (5/16")	CSK Head	-
	XTS0814/1	8-14mm (5/16-9/16")	1000kg (2200lbs)	✓	●	✓	✓	✓	-	545g (19.1oz)	2 x M8 (5/16")	CSK Head	-
	XTS0814/2	8-14mm (5/16-9/16")	1000kg (2200lbs)	✓	●	✓	-	✓	-	1030g (36.33 oz)	4 x M8 (5/16")	CSK Head	-
	XTS0814/3	8-14mm (5/16-9/16")	1000kg (2200lbs)	✓	●	✓	-	✓	-	1500g 952.90oz	6 x M8 (5/16")	CSK Head	-
XCS	XCS0610/1	6-10mm (1/4-3/8")	700kg (1543lbs)	✓	○●●●●	✓	✓	✓	-	630g (22.1oz)	2 x M8 (5/16")	CSK Head	-
	XCS0610/2	6-10mm (1/4-3/8")	700kg (1543lbs)	✓	○●●●●	✓	-	✓	-	630g (22.1oz)	4 x M8 (5/16")	CSK Head	-
	XCS0610/3	6-10mm (1/4-3/8")	700kg (1543lbs)	✓	○●●●●	✓	-	✓	-	630g (22.1oz)	6 x M8 (5/16")	CSK Head	-
	XCS0814/1	8-14mm (5/16-9/16")	1200kg (2640lbs)	✓	○●●●●	✓	✓	✓	-	630g (22.1oz)	2 x M8 (5/16")	CSK Head	-
	XCS0814/2	8-14mm (5/16-9/16")	1200kg (2640lbs)	✓	○●●●●	✓	-	✓	-	630g (22.1oz)	4 x M8 (5/16")	CSK Head	-
	XCS0814/3	8-14mm (5/16-9/16")	1200kg (2640lbs)	✓	○●●●●	✓	-	✓	-	630g (22.1oz)	6 x M8 (5/16")	CSK Head	-
XTR	XTR0812	8-12mm (5/16-1/2")	1000kg (2200lbs)	-	○●●●●	-	✓	-	-	340g (12.0oz)	2 x M8 (5/16")	HEX or CSK	-
	XTR0812/H	8-12mm (5/16-1/2")	1000kg (2200lbs)	-	○●●●●	-	✓	-	-	365g (12.5oz)	3 x M6	POSI PAN	✓
XTX	XTX08	8mm	800kg (1764lbs)	-	○●●●●	-	-	-	✓	360g (12.07oz)	2 x M8 (5/16")	HEX or CSK	-
	XTX09	9mm	900kg (1984lbs)	-	○●●●●	-	-	-	✓	360g (12.07oz)	2 x M8 (5/16")	HEX or CSK	-
	XTX10	10mm	1000kg (2205lbs)	-	○●●●●	-	-	-	✓	365g (12.85oz)	2 x M8 (5/16")	HEX or CSK	-
	XTX11	11mm	1100kg (2425lbs)	-	○●●●●	-	-	-	✓	365g (12.85oz)	2 x M8 (5/16")	HEX or CSK	-
	XTX12	12mm	1200kg (2645lbs)	-	○●●●●	-	-	-	✓	375g (13.22oz)	2 x M8 (5/16")	HEX or CSK	-
XXA	XX0812	8-12mm (5/16-1/2")	1800kg (3970lbs)	-	●●	-	✓	✓	✓	1080g (38.1oz)	2 x M8 (5/16")	HEX, CSK or CAP	✓
XXB	XXB0812	8-12mm (5/16-1/2")	2350kg (5180lbs)	-	●●	✓	✓	✓	✓	1080g (38.1oz) 2	2 x M8 (5/16")	HEX, CSK or CAP	✓
XXC	XXC0812	8-12mm (5/16-1/2")	2350kg (5180lbs)	-	●●	✓	✓	✓	✓	900g (31.7oz)	2 x M8 Titanium	HEX, CSK or CAP	✓

● Black    ● Dark Grey    ○●●●● White, Black, Stainless Steel & Silver    ●● Black & Silver    ○● White & Unpainted  
 ○●●●● White, Black, Amber, Blue & Yellow    ○●●●● White, Black, Silver, Amber, Blue & Yellow

# ROPE HOLDING COMPARISON CHART

## JAMMERS - WINCH RELEASE

PRODUCT	MODEL	LINE DIA	MWL AT MAX LINE DIAMETER	MULTIPLES AVAILABLE	COLOUR	CERAMIC COATED PARTS	SIDE-MOUNT VERSION	LOCK OPEN VERSION	REMOTE OP	WEIGHT (STANDARD MODEL EXC FASTENERS)	FASTENERS	FASTENER HEAD TYPE	SUPPLIED
ZR	ZR1014	10-14mm (3/8-9/16")	1500kg (3300lbs)	-	●	-	-	-	-	505g (17.8oz)	2 x M8 (5/16")	Button Head	✓
ZXB	ZXB0812	8-12mm (5/16-1/2")	3000kg (6600lbs)	-	●●	✓	-	-	✓	675g (23.8oz)	2 x M10	CSK	✓
ZS ALLOY	ZS0810	8-10mm (5/16-3/8")	1500kg (3310lbs)	-	●	✓	✓	-	✓	750g (26.3oz)	3 x M8	Stud	✓
	ZS1214	12-14mm (7/16-9/16")	2200kg (4850lbs)	-	●	✓	✓	-	✓	1390g (49.0oz)	4 x M8	Stud	✓
	ZS1618	16-18mm (5/8-11/16")	4000kg (8820lbs)	-	●	✓	✓	-	✓	2025g (70.9oz)	6 x M10	Stud	✓
ZS CARBON	ZS1014C	10-14mm (3/8-9/16")	4000kg (8820lbs)	-	○●	✓	✓	-	✓	1070g (37.7oz)	4 x M10	Stud	✓
	ZS1618C	16-18mm (5/8-11/16")	6000kg (13230lbs)	-	○●	✓	✓	-	✓	1790g (63.1oz)	6 x M10	Stud	✓
	ZS1824C	18-24mm (11/16-15/16")	8000kg (17640lbs)	-	○●	✓	✓	-	✓	2100g (73.5oz)	10 x M10	Stud	✓
	ZS2632C	26-32mm (1-11/4")	12000kg (26460lbs)	-	○●	✓	✓	-	✓	5100g (179.9oz)	14 x M10	Stud	✓
ZS OPEN	ZS0810/OPEN	8-10mm (5/16-3/8")	1200kg (2650lbs)	-	●	-	Custom	-	-	918g (32.4oz)	N/A	N/A	N/A
	ZS1014/OPEN	10-14mm (3/8-9/16")	1800kg (3970lbs)	-	●	-	Custom	-	-	1349g (47.6oz)	N/A	N/A	N/A
	ZS1418/OPEN	14-18mm (9/16-11/16")	3200kg (7040lbs)	-	●	-	Custom	-	-	2138g (75.4oz)	N/A	N/A	N/A
	ZS1824/OPEN	18-24mm (11/16-15/16")	5200kg (11440lbs)	-	●	-	Custom	-	-	4150g (145.3oz)	N/A	N/A	N/A
	ZS2632/OPEN	26-32mm (1-11/4")	7800kg (17160lbs)	-	●	-	Custom	-	-	6100g (213.5oz)	N/A	N/A	N/A

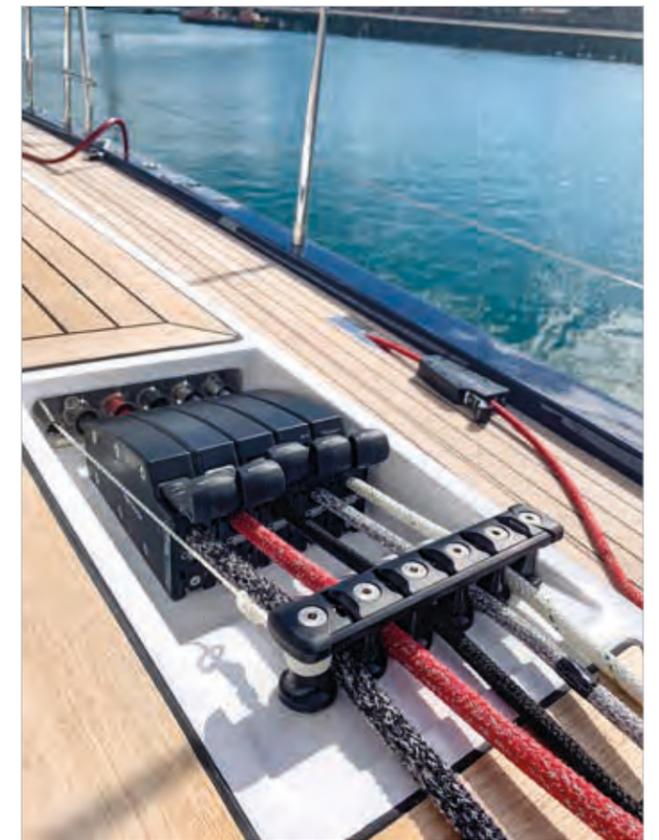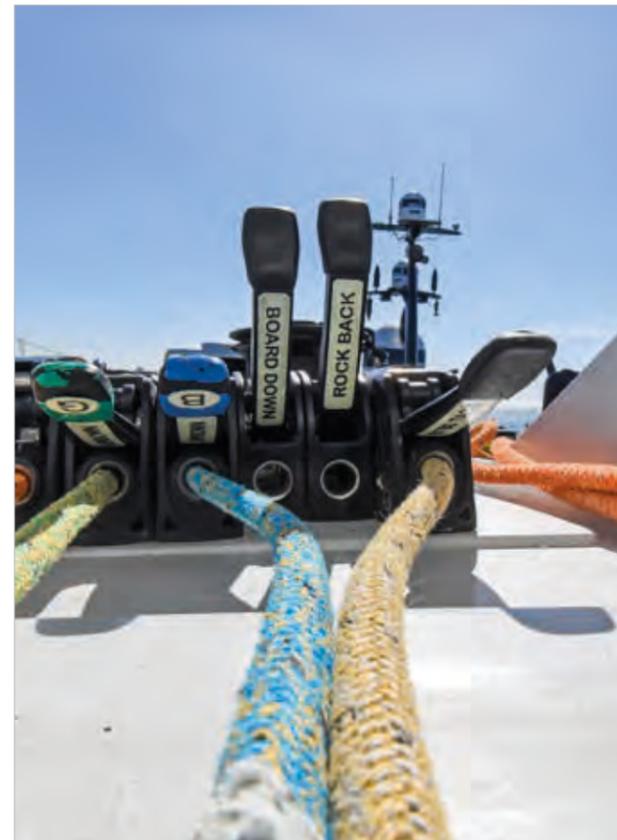

# PXR CAM CLEAT THE EASIEST CLEAT TO RELEASE



Compact cam cleat for easy fast release of high performance controls and mainsheets under load


Lines 2 - 6mm (3/32 - 1/4")  
Lines 6 - 10mm (5/16 - 3/8")

Loads up to 200kg (440lbs)

## FEATURES

- Fast precise control for hand-tensioned lines
- Hard anodised alloy cam and base
- Ideal for high performance lines
- Micro size for small diameters
- Three stage release control switch
- Ideal for single line spinnaker hoist systems
- Resists accidental re-cleating
- Audible lock

## ROPE SIZE GUIDE

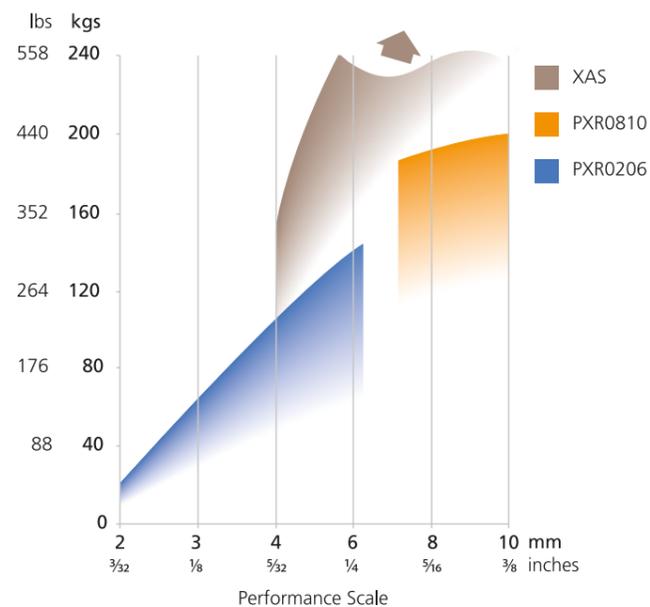

Model	Line Dia	SWL at max line dia	Break load	Weight
PXR0206	2-6mm (3/32-1/4")	140kg (308lbs)	280kg (616lbs)	43g (1.5oz)
PXR0206/SW	2-6mm (3/32-1/4")	140kg (308lbs)	280kg (616lbs)	77g (2.7oz)
PXR0206/VP	2-6mm (3/32-1/4")	140kg (308lbs)	280kg (616lbs)	97g (3.4oz)
PXR0206/T	2-6mm (3/32-1/4")	140kg (308lbs)	280kg (616lbs)	53g (1.9oz)
PXR0810	6-10mm (5/16-3/8")	200kg (440lbs)	400kg (880lbs)	84g (2.9oz)
PXR0810/SW	6-10mm (5/16-3/8")	200kg (440lbs)	400kg (880lbs)	124g (4.3oz)
PXR0810/T	6-10mm (5/16-3/8")	200kg (440lbs)	400kg (880lbs)	101g (3.5oz)

# PXR CAM CLEAT THE EASIEST CLEAT TO RELEASE



## RETROFIT 'T'

Matched hole centres allow direct replacement of traditional cam cleats with PXR

PXR0206/T - 27mm (1 1/16") hole centres - for upgrading dinghy control line cam cleats

PXR0810/T - 38mm (1 1/2") hole centres - for upgrading main sheet swivel cleats and traveller systems on dinghies, keelboats and yachts. Also cam cleats on downhauls, vang and backstay controls



## DECK SWIVEL 'SW'

PXR0206/SW for single cleat control of jib sheets and dinghy vangs

Preferred by dinghy builders for single line spinnaker hoist systems

PXR0810/SW for bigger boat swivel cam cleat control applications

Same footprint as traditional swivel cam cleats



## CENTRE PIVOT 'VP'\*

Pivoting sheave and cleat - super compact design

Centrally - for feeding control lines out to the sides

Under boom - for outhaul and gnav (reverse vang) controls

At mast base - for catamaran downhauls and vangs

Easily detached

Accepts Harken sheave ref: H415

\* Available for PXR0206 only



## MAST BRACKET

Mast bracket for PXR0206 and PXR0810

Hard black anodised

Fits mast sections on most dinghies and keelboats up to 24ft

PXR-BRACKET



# XAS POWERCLUTCH EFFORTLESS MULTI-ROLE CLUTCH



The perfect clutch for racing yachts up to 27' and cruising yachts up to 34'


Lines 4 - 12mm (5/32 - 1/2")

Loads up to 575kg (1270lbs)

## FEATURES

- Superb all round performance
- High strength, soft grip ergonomic handle
- Modular design: easy to upgrade & maintain
- Effortless release
- Line-friendly grip profile
- Excellent performance across the widest rope range
- High performance, small diameter version for 4-8mm lines
- Side-mountable on either side with fairing kit XAS-SMNT

## ROPE SIZE GUIDE

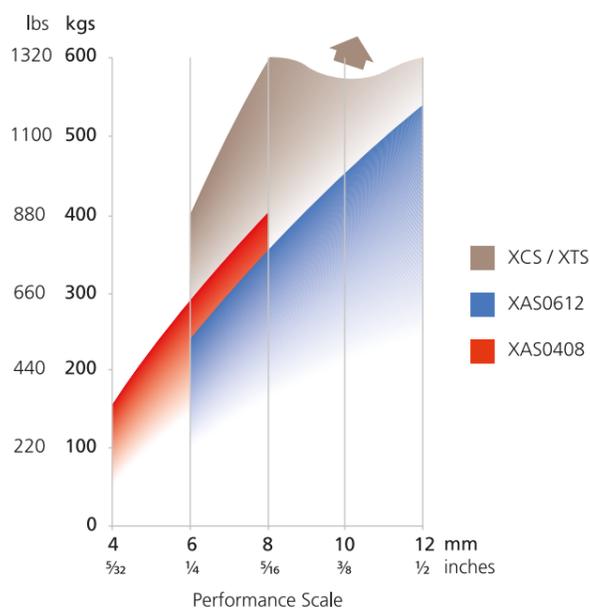

Model	Line Dia	SWL at max line diameter	Kit form for endless lines
XAS0612/1	6-12mm (1/4"-1/2")	575kg (1270lbs)	XAS0612/1M
XAS0612/2	6-12mm (1/4"-1/2")	575kg (1270lbs)	XAS0612/2M
XAS0612/3	6-12mm (1/4"-1/2")	575kg (1270lbs)	-

Model	Line Dia	SWL at max line diameter
XAS0408/1	4-8mm (5/32"-5/16")	450kg (990lbs)
XAS0408/2	4-8mm (5/32"-5/16")	450kg (990lbs)
XAS0408/3	4-8mm (5/32"-5/16")	450kg (990lbs)

# XAS POWERCLUTCH EFFORTLESS MULTI-ROLE CLUTCH



## SMALL DIAMETER HIGH LOAD XAS0408

Optimised clutching and holding power on small diameter lines 4 - 8mm (5/32" - 5/16"). Strongly recommended for sportsboat and other small boat high performance applications. Check rope size/load graph  
Regular size XAS0612 may be converted for small diameters by using base module XAS-BASE0408

## CONTINUOUS LINE XAS/M

Solves the problem of threading a continuous furling line  
These clutches are supplied as kits with open bullseyes to be assembled directly onto the line  
XAS0612/1M, XAS0612/2M, XAS0612/3M

## XAS TIPS

### Why a broad line size range is essential in your clutch

Lines often need to be switched or replaced, or smaller stronger lines fitted. A bank of clutches should never be specific to any one diameter or type of line

### Leading Lines Aft

For best results with your XAS clutch installation, use model T38 deck organisers

## SIDE MOUNTING AN XAS

Side mounting is usually the neatest solution for spars, side decks, and coamings and is unique to Spinlock. XAS0612/HS, XAS0612/HP  
To install a single XAS on its port or starboard side, simply use the fairing kit XAS-SMNT



# XTS POWERCLUTCH MID / HIGHER LOAD ROPE HOLDING




Specified as standard on larger production yachts worldwide and the choice of racing yachts inshore and offshore

Lines 6 - 14mm (1/4 - 9/16")

Loads up to 1000kg (2200lbs)

## ROPE SIZE GUIDE

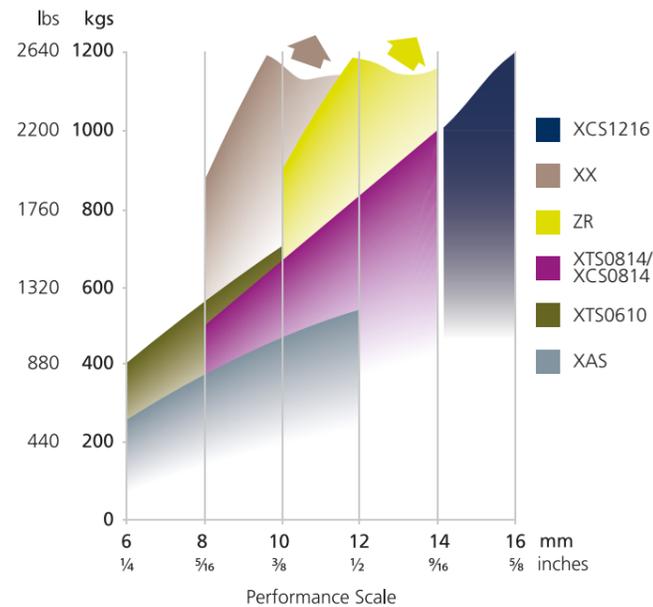

## FEATURES

- Available in single, double and triple units
- Extruded alloy handle with soft end grip
- Secure handle locking in open or closed position
- Side fairing accessory for side mounting on either side
- Two versions offer wide line diameter range
- Now available with ceramic coated cam and base for consistent holding of performance lines
- Wide range of cam upgrade options
- Easy access to fasteners
- Handle label set supplied

Model	Line Dia	SWL at max line diameter
XTS0610/1	6-10mm (1/4-3/8")	700kg (1543lbs)
XTS0610/2	6-10mm (1/4-3/8")	700kg (1543lbs)
XTS0610/3	6-10mm (1/4-3/8")	700kg (1543lbs)
XTS0610/HP	6-10mm (1/4-3/8")	700kg (1543lbs)
XTS0610/HS	6-10mm (1/4-3/8")	700kg (1543lbs)
XTS0814/1	8-14mm (5/16-9/16")	1000kg (2200lbs)
XTS0814/2	8-14mm (5/16-9/16")	1000kg (2200lbs)
XTS0814/3	8-14mm (5/16-9/16")	1000kg (2200lbs)
XTS0814/HP	8-14mm (5/16-9/16")	1000kg (2200lbs)
XTS0814/HS	8-14mm (5/16-9/16")	1000kg (2200lbs)

For ceramic versions add 'C' to end of part code

## XTS SPECIAL PURPOSE CLUTCHES

Ceramic CAM and Base versions for consistent holding of modern performance lines. If upgrading to Ceramic it's important this is both CAM and BASE, available separately or as a kit for 0610 or 0814.


Continuous Line version for assembly onto the line for endless line systems

Small diameter line optimised version XTS0610

Side Mounting versions for spars, side decks and coamings

Lock-Open Cam version. When the lock is engaged the line is able to run freely in both directions until normal clutch function is needed

# XCS POWERCLUTCH MID / HIGHER LOAD ROPE HOLDING

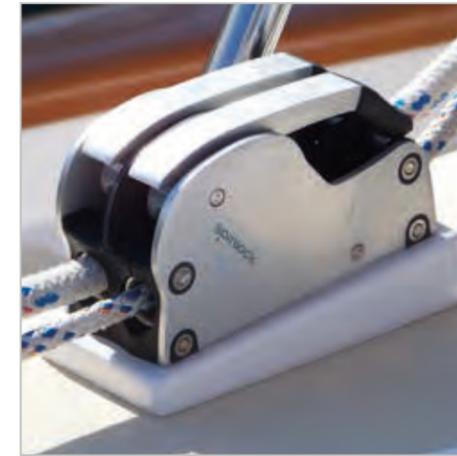

The XCS offers a range of exceptional quality finishes to match your deck or rig

Lines 6 - 16mm (1/4 - 9/16")

Loads up to 1200kg (2640lbs)



## FEATURES

- XCS offers large diameter rope holding in a clutch
- Aluminium sides for sustained high load operation
- Available in white coated, black anodised or silver polished alloy to match deck, rig or other Spinlock hardware
- Mirror polished stainless steel versions also available
- Handle label set supplied
- Available in single, double and triple units
- Extruded alloy handle with soft end grip
- Secure handle locking in open or closed position
- Side fairing accessory for side mounting on either side
- Two versions offer wide line diameter range
- Now available with ceramic coated cam and base for consistent holding of performance lines
- Wide range of cam upgrade options
- Easy access to fasteners

## XCS SPECIAL PURPOSE CLUTCHES

Ceramic CAM and Base versions for consistent holding of modern performance lines. If upgrading to Ceramic it's important this is both CAM and BASE, available separately or as a kit for 0610 or 0814

Large Diameter line version XCS1216

Small Diameter line optimised version XCS0610

Continuous Line version for assembly onto the line for endless line systems

Side Mounting versions for spars, side decks and coamings

Lock-Open Cam version. When the lock is engaged, the line is able to run freely in both directions until normal clutch function is needed

### Stainless Steel Sided XCS/SS

Mirror polished stainless steel sided versions available in single, double and triple. Popular with classic yachts to match extensive custom on-deck stainless metal work

XCS0814/SS1, XCS0814/SS2, XCS0814/SS3

- White (W)
- Black (B)
- Stainless Steel (SS)
- Silver (S)



Model	Line Dia	SWL at max line diameter
XCS0610/1	6-10mm (1/4-3/8")	700kg (1543lbs)
XCS0610/2	6-10mm (1/4-3/8")	700kg (1543lbs)
XCS0610/3	6-10mm (1/4-3/8")	700kg (1543lbs)
XCS0814/1	8-14mm (5/16-9/16")	1000 kg (2200lbs)
XCS0814/2	8-14mm (5/16-9/16")	1000 kg (2200lbs)
XCS0814/3	8-14mm (5/16-9/16")	1000 kg (2200lbs)
XCS1216/1	12-16mm (1/2-5/8")	1200kg (2640lbs)
XCS1216/2	12-16mm (1/2-5/8")	1200kg (2640lbs)
XCS1216/3	12-16mm (1/2-5/8")	1200kg (2640lbs)

For ceramic versions add 'C' to end of part code



# XTX POWERCLUTCH NEW SOFT GRIP ROPE CLUTCH RANGE



Optimised SOFTGRIP braid technology

Ropes 8 - 12mm (5/16"-1/2")

Loads up to 1200kg (2645lbs)

### Weights

XTX08	360g
XTX09	360g
XTX10	365g
XTX11	365g
XTX12	375g



1) Pull release toggle until 'click' to latch open

2) Push button to hold load with SOFTGRIP Braid



REPLACEMENT GRIP ASSEMBLY

○ White (W)	● Amber (A)
● Black (B)	● Yellow (Y)
● Blue (L)	

## FEATURES

- Ultra-lightweight mid-load rope holding
- Optimised SOFTGRIP braid with high performance braid anchor technology
- Gentle on rope covers - increases the lifecycle of your ropes
- Neat, retracting toggle for fingertip control of clutching power
- Controlled and consistent release across full range of loads
- Push button clutch activation with lock-open indicator
- Fully enclosed body protects against accidental release
- Small footprint and very low profile with no handle rotation space required
- Simple, versatile installation – 2 fasteners for deck, bulkhead, rig or tunnel mounting
- Remote release capability
- Easy set-up, no performance tuning required
- On-deck access for cleaning or replacing SOFTGRIP diameter

Model	Colour	Rope Dia.	SWL at max rope dia.
XTX08/A	Amber	8mm (5/16")	800kg (1764lbs)
XTX08/B	Black	8mm (5/16")	800kg (1764lbs)
XTX08/L	Blue	8mm (5/16")	800kg (1764lbs)
XTX08/W	White	8mm (5/16")	800kg (1764lbs)
XTX08/Y	Yellow	8mm (5/16")	800kg (1764lbs)
XTX09/A	Amber	9mm (max 3/8")	900kg (1980kg)
XTX09/B	Black	9mm (max 3/8")	900kg (1980kg)
XTX09/L	Blue	9mm (max 3/8")	900kg (1980kg)
XTX09/W	White	9mm (max 3/8")	900kg (1980kg)
XTX09/Y	Yellow	9mm (max 3/8")	900kg (1980kg)
XTX10/A	Amber	10mm (3/8")	1000kg (2205lbs)
XTX10/B	Black	10mm (3/8")	1000kg (2205lbs)
XTX10/L	Blue	10mm (3/8")	1000kg (2205lbs)
XTX10/W	White	10mm (3/8")	1000kg (2205lbs)
XTX10/Y	Yellow	10mm (3/8")	1000kg (2205lbs)
XTX11/A	Amber	11mm (7/16")	1100kg (2425kg)
XTX11/B	Black	11mm (7/16")	1100kg (2425kg)
XTX11/L	Blue	11mm (7/16")	1100kg (2425kg)
XTX11/W	White	11mm (7/16")	1100kg (2425kg)
XTX11/Y	Yellow	11mm (7/16")	1100kg (2425kg)
XTX12/A	Amber	12mm (1/2")	1200kg (2645lbs)
XTX12/B	Black	12mm (1/2")	1200kg (2645lbs)
XTX12/L	Blue	12mm (1/2")	1200kg (2645lbs)
XTX12/W	White	12mm (1/2")	1200kg (2645lbs)
XTX12/Y	Yellow	12mm (1/2")	1200kg (2645lbs)

### Replacement braids

XTX-GRIP08	Replacement grip assembly for 8mm line
XTX-GRIP09	Replacement grip assembly for 9mm line
XTX-GRIP10	Replacement grip assembly for 10mm line
XTX-GRIP11	Replacement grip assembly for 11mm line
XTX-GRIP12	Replacement grip assembly for 12mm line

# XTR POWERCLUTCH MID / HIGHER LOAD ROPE HOLDING




## FEATURES

- Superb mid load holding performance
- 'Reactive Clutching' - line holding is consistent and fast across the full diameter range - release is smooth and progressive
- Offers significant rope holding improvement on the latest small diameter rope types
- Ultra lightweight alloy/composite construction
- Handle lifts to ergonomic position for release
- Reactor cam module is easily removed for on-deck cleaning and servicing
- Single units only
- Side mount versions available
- One person installation



Model	Description	Line Dia	SWL at max line dia
<b>XTR Powerclutch</b>			
XTR0812/B	Black	8-12mm (5/16"-1/2")	1000kg (2200lbs)
XTR0812/S	Silver	8-12mm (5/16"-1/2")	1000kg (2200lbs)
XTR0812/W	White	8-12mm (5/16"-1/2")	1000kg (2200lbs)
XTR0812/A	Amber	8-12mm (5/16"-1/2")	1000kg (2200lbs)
XTR0812/L	Blue	8-12mm (5/16"-1/2")	1000kg (2200lbs)
XTR0812/Y	Yellow	8-12mm (5/16"-1/2")	1000kg (2200lbs)
<b>XTR Powerclutch, Sidemount (PORT or STBD)</b>			
XTR0812/HB	Black	8-12mm (5/16"-1/2")	1000kg (2200lbs)
XTR0812/HS	Silver	8-12mm (5/16"-1/2")	1000kg (2200lbs)
XTR0812/HW	White	8-12mm (5/16"-1/2")	1000kg (2200lbs)
XTR0812/HA	Amber	8-12mm (5/16"-1/2")	1000kg (2200lbs)
XTR0812/HL	Blue	8-12mm (5/16"-1/2")	1000kg (2200lbs)
XTR0812/HY	Yellow	8-12mm (5/16"-1/2")	1000kg (2200lbs)

## ROPE SIZE GUIDE

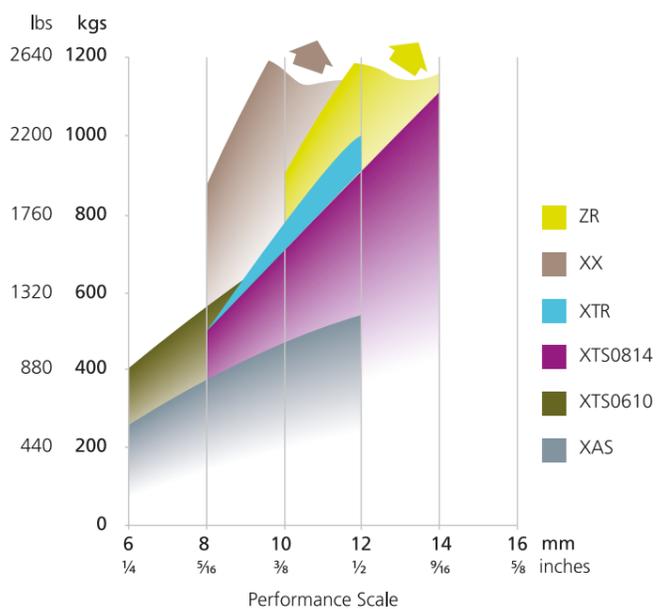

# ZR JAMMER MID / HIGHER LOAD WINCH RELEASE JAMMER



Secure 'hands free' jammer technology for production yachts

Lines 10 - 14mm (3/8 - 9/16")

Loads up to 1500kg (3300lbs)


**(A) ZR Grip Switch 'on'** One way 'Jamming' action: the loaded line cannot be released until primed and the load is taken on the winch

**(B) ZR Grip Switch 'off'** Primed for winch release: jaws latch open the instant load transfers to the winch

## FEATURES

- Controlled release action: always safely from the winch
- Holds three line sizes 10mm, 12mm and 14mm
- Holds 50% more line load than XTS/XTR clutch
- ZR Jammer can be primed for release using the GRIP switch
- Easy access fastener holes
- High tensile fasteners (M8 x 60mm A4-70), nuts and washers supplied
- Replaceable jaw cartridge accessed with a single screw
- Self-sealing deck fastening
- Can be configured for remote use
- Footprint matched to XX allows simple upgrade for higher loads or release functionality
- Single units only

## ROPE SIZE GUIDE

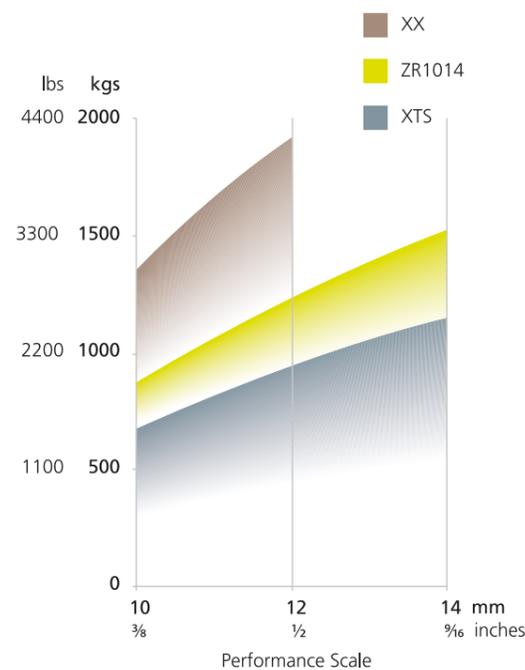

Model	Line Dia	SWL at max line diameter
ZR1014	10-14mm (3/8"-9/16")	1500kg (3300lbs)

# XX SERIES - XXA, XXB & XXC POWERCLUTCH

SECURE CLUTCHING FOR HIGH LOADS



The only secure clutch solution for performance yachts

Lines 8 - 12mm (5/16 - 1/2")

XXA Loads up to 1800kg (3970lbs)  
XXB Loads up to 2350kg (5180lbs)  
XXC Loads up to 2350kg (5180lbs)


## FEATURES - XX SERIES

- Latest jaw technology for consistent holding of performance ropes
- Optimised for high performance 8-12mm (5/16-1/2") line diameters
- Smooth controlled release action
- One piece jaw set is easy to remove and clean
- Access ports for fresh water flushing
- Line height optimised for correct lead to winch and side mounting
- Holds lines up to a massive 2350kg (5180lbs) working load
- Side mount version
- Ceramic jaws offer consistent holding of blended ropes and extended jaw life (XXB/XXC)
- Internal Torlon roller bearings ensure lasting performance and durability under high loads (XXB/XXC)

### Remote operation, handle free option

- Lock Open feature allows lines to run through freely with handle closed; for applications such as mainsheets and spinnaker sheets
- Allows structural integration and jammer style operation (release using winch)
- Black or silver anodised (all models) or amber anodised (XXC only)
- Custom finishes available

## ROPE SIZE GUIDE

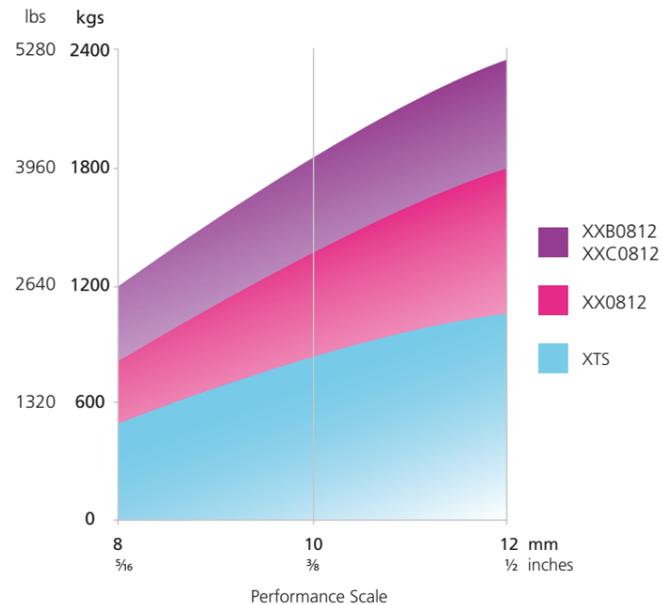


# XX SERIES

SECURE CLUTCHING FOR HIGH LOADS

	XXA	XXB	XXC
WEIGHT	1100g	1100g	900g
MAX WORKING LOAD	1800Kg	2350Kg	2350Kg
ANODISED JAWS	✓	-	-
CERAMIC JAWS	-	✓	✓
TORLON ROLLER UPGRADE	-	✓	✓
TITANIUM COMPONENTS	-	-	✓
LIGHTWEIGHT MACHINED HANDLE	-	-	✓
ULTRA LIGHTWEIGHT MACHINED BODY	-	-	✓
UNIDIRECTIONAL CARBON REINFORCEMENT	-	-	✓

	BLACK ANODISED		XX0812	XXB0812	XXC0812
STANDARD	SILVER ANODISED	●	XX0812/S	XXB0812/S	XXC0812/S
	AMBER ANODISED	●	-	-	XXC0812/A
		●			
SIDE MOUNT PORT	BLACK	●	XX0812/HP	XXB0812/HP	XXC0812/HP
	SILVER	●	XX0812/HPS	XXB0812/HPS	XXC0812/HPS
SIDE MOUNT STARBOARD	BLACK	●	XX0812/HS	XXB0812/HS	XXC0812/HS
	SILVER	●	XX0812/HSS	XXB0812/HSS	XXC0812/HPS
LOCK OPEN	BLACK	●	XX0812/L	XXB0812/L	XXC0812/L
	SILVER	●	XX0812/LS	XXB0812/LS	XXC0812/LS
REMOTE	BLACK	●	XX0812/R	XXB0812/R	XXC0812/R
	SILVER	●	XX0812/RS	XXB0812/RS	XXC0812/RS



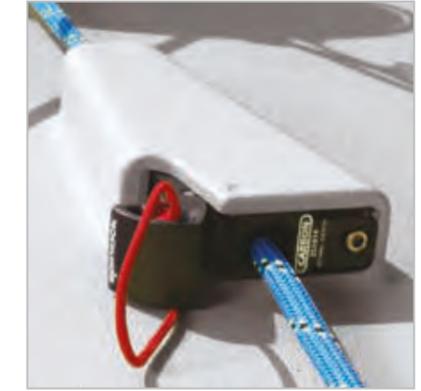

New Jammer using aerospace technology for super strong construction, with higher performance for lowest weight and deck footprint

Lines 8 - 12mm (5/16 - 1/2")

Loads up to 3000kg

Product Weight 675kg

Fasteners MK10 CSK

### FEATURES

- ZXB0812 Jammer - Lines 8-12mm and loads up to 3000kgs
- Lightweight high strength aluminium body formed as a monocoque structure
- Use of aerospace technology has reduced the size and weight by a massive 40%
- Very low profile body - smaller product for the load holding
- Very low pull through friction
- Low maintenance PTFE bearings
- Lightweight, ceramic jaws for ultimate high load performance and resistance to heat and abrasion
- Clip-on jaw grips for easy replacement ensure lower cost and weight, important for long life and less waste
- Toggle and button latching mechanism - replacing traditional exposed handle
- Easy to operate from various positions
- Remote operation compatible
- Simple to view on/off status of the jammer
- Easy on deck servicing and maintenance

- Black (B)
- Silver (S)

Model	Description	Line Dia	SWL at max line dia
ZXB0812	ZXB Jammer, Black	8-12mm (5/16 - 1/2")	3000kg (6614lbs)

### SPARES

Part	Description
ZXB-KIT12	ZXB Jammer replacement Jaws, Bearings, Rear Cover and Toggle/Latch Assembly
ZX-BRG12	ZXB Jammer 8-12mm PTFE Bearings
ZX-MLDG12	ZXB Jammer 8-12mm Moulding Se



Unrivalled performance for larger diameters and high loads with winch-controlled release


Lines 8 - 18mm (5/16 - 11/16")

Loads up to 4000kg (8820lbs)

### FEATURES

- Digitally modelled jaw surfaces hold high tech rope securely at it's safe working load
- Excellent performance on smaller diameter lines
- Easy on-deck service access
- Carbon versions available with lightweight, super strength body
- Side mount using existing holes in jammer body
- Ceramic coated jaws option offers consistent holding of blended covered ropes

### ROPE SIZE GUIDE

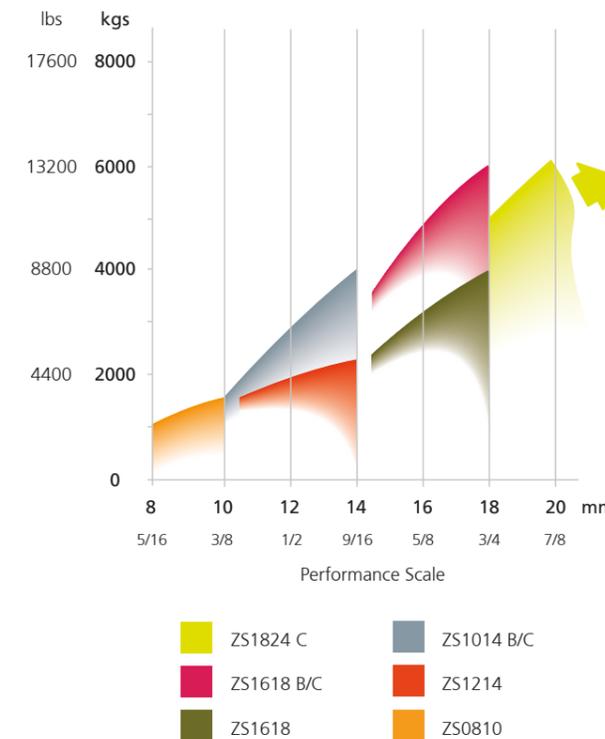

Model	Line Dia	SWL at max line dia	Weight
ZS0810	8-10mm (5/16-3/8")	1500kg (3310lbs)	750g (26.3oz)
ZS1214	12-14mm (7/16-9/16")	2200kg (4850lbs)	1190g (41.7oz)
ZS1618	16-18mm (5/8-11/16")	4000kg (8820lbs)	2025g (70.9oz)

### CUSTOM OPTIONS



# ZS CARBON POWERJAMMER LIGHTWEIGHT JAMMER FOR HIGH LOADS



ZS Carbon Jammers for ultimate load holding and minimum product weight

Lines 10 - 32mm (3/8 - 1 1/4")

Loads up to 12000kg (26460lbs)

## FEATURES

ZS Carbon Jammers are supplied with high tensile fasteners for standard mounting. ZS Carbon Jammers can be vertically or side mounted on masts. Custom mounting plates are available for each jammer

Can be set up for remote operation using ZS-RLB (see page 23)

Supplied white painted as standard. Custom finishes and unpainted product also available

### ZS Bonded Series

Smaller and lighter than standard models, supplied unpainted for direct bonding. Applications include foredeck tack control lines and remote release locks, bonded to mast and booms

## UPGRADES AND SPARES

ZS 'P' Series	For use in:
ZS-JAW08	ZS0810
ZS-JAW12	ZS1214 and ZS1014C
ZS-JAW16	ZS1618 and ZS1618C
ZS-JAW18	ZS1824C

ZS 'HC' Series	For use in:
ZS-JAW08HC	ZS0810
ZS-JAW12HC	ZS1214 and ZS1014C
ZS-JAW16HC	ZS1618 and ZS1618C
ZS-JAW18HC	ZS1824C

Part	Description
ZS-JAW16-12	Line reducing kit for ZS1618 Alloy 'P-Series' Digital Jaw Assembly (PTFE Sliders)
ZS-JAW16-12/B	Line reducing kit for ZS1618B 'P-Series' Digital Jaw Assembly (PTFE Sliders)
ZS-JAW16-12/C	Line reducing kit for ZS1618C 'P-Series' Digital Jaw Assembly (PTFE Sliders)
ZS-JAW16-12HC	Line reducing kit for ZS1618 Alloy 'H' CERAMIC Series Digital Jaw Assembly (PTFE sliders)
ZS-JAW16-12HC/B	Line reducing kit for ZS1618B 'H' CERAMIC Series Digital Jaw Assembly (PTFE sliders)
ZS-JAW16-12HC/C	Line reducing kit for ZS1618C 'H' CERAMIC Series Digital Jaw Assembly (PTFE sliders)
ZS-JAW18-12	Line reducing kit for ZS1824 Carbon Jaw Assembly (PTFE sliders)
ZS-JAW18-12C	Line reducing kit for ZS1824 Carbon CERAMIC Series Digital Jaw Assembly (PTFE sliders)

Model	Line Dia	SWL at max line dia	Weight
ZS1014C	10-14mm (3/8-9/16")	4000kg (8820lbs)	1024g (36.2oz)
ZS1014B	10-14mm (3/8-9/16")	4000kg (8820lbs)	630g (22.2oz)
ZS1618C	16-18mm (5/8-11/16")	6000kg (13230lbs)	1390g (49.0oz)
ZS1618B	16-18mm (5/8-11/16")	6000kg (13230lbs)	910g (32.1oz)
ZS1824C	18-24mm (11/16-15/16")	8000kg (17640lbs)	2100g (73.5oz)
ZS2632C	26-32mm (1-11/16")	12000kg (26460lbs)	5100g (179.9oz)

# PD CARBON PADEYES STRONG POINT



Model	SWL Vertical (kg)	SWL 45 (kg)	SWL Horizontal (kg)
PD/6C	2150	1290	1290
PD/8C	4000	2400	2400
PD/10C	7600	5250	5250
PD/12C	9750	6750	6750

## FEATURES

Carbon deck and backing plates

High quality 17-4PH stainless steel

Excellent strength to weight ratio

Increased through laminate bearing surfaces to minimise tearing

Significantly reduced weight to previous padeye range

Improved shock loading resistance

Compact foot print and the ability to 'nest' together

Easily sealed

# ZS OPEN POWERJAMMER MOBILE HIGH LOAD JAMMER



ZS0810/OPEN

The essential solution for peeling spinnakers, headsails and reefing. Unbeatable in an emergency

Lines 8 - 32mm (5/16 - 1 1/4")

Loads up to 7800kg (17190lbs)

## FEATURES

Easily attached to any strong point with a strop

Hinged body can be opened and closed like a snatch-block

Acts as an emergency line clamp in case of winch or other hardware failure, jammed halyards, riding turns or damaged lines

Frees a winch for a sail change

Custom options include rig or deck mounting holes

Model	Line Dia	SWL at max line diameter
ZS0810/OPEN	8-10mm (5/16-3/8")	1200kg (2650lbs)
ZS1014/OPEN	10-14mm (3/8-9/16")	1800kg (3970lbs)
ZS1418/OPEN	14-18mm (9/16-11/16")	3200kg (7040lbs)
ZS1824/OPEN	18-24mm (11/16-15/16")	5200kg (11440lbs)
ZS2632/OPEN	26-32mm (1-11/16")	7800kg (17160lbs)

# ZS-RLB REMOTE RELEASE REMOTE OPERATION OF ZS JAMMERS



For use with ZS0810, ZXB0812, ZS1214, ZS1014C, ZS1618 and ZR1014 jammers

## FEATURES

ZS-RLB and ZS-RLB/L Remote Release Switch

1. Lock ZS-RLB switch in forward 'locking position' - the line is loaded or ready for load

2. Pre-set - with the line under load the ZS-RLB switch is rotated to the 'unlock' position - this pre-tensions the trip line ready for release

3. Fire - load on the line is taken on a winch and ZS Jaws spring to the open position. The load can now be released from the winch, to run freely through the ZS

For use with ZS0810, ZXB0812, ZS1214, ZS1014C, ZS1618 and ZR1014 jammers, all supplied configured for trip line attachment and lead

Allows the jammer to be pre-tensioned to release automatically, when the load is taken on the winch

# TSR FULLY CUSTOMISABLE ORGANISER FOR LEADING HIGHLY LOADED LINES



## TSR ORGANISER

Aft Organiser for diverting lines from clutches and jammers

## TSR LOW SHEAVE ORGANISER

Forward Organiser for diverting high loaded lines

## FEATURES

- 20mm and 30mm diameter alloy sheaves
- 30mm sheaves for diverting large deflection angles and large diameter lines
- All rotating sheaves with plain bearings
- Alloy top rails
- Modular design and assembly – sheaves can be moved to any spacing
- Sheave diameters can be optimised for each application
- Tulip shaped design reduces friction from vertical deflection
- Low profile design
- Simple inserting and removal of endless lines
- Central shaft designed to spread load through laminate
- Titanium parts available to further reduce weight
- Custom sheave spacing and Spinlock design service available



# TSR FULLY CUSTOMISABLE ORGANISER FOR LEADING HIGHLY LOADED LINES

SHEAVE DIAMETER MM	20 MM	30 MM	20 MM	30 MM	44 MM
SHEAVE HEIGHT	LOW	LOW	STANDARD	STANDARD	STANDARD
NUMBER OF SHEAVES					
2	TSR20L/2	TSR30L/2	TSR20/2	TSR30/2	*
3	TSR20L/3	TSR30L/3	TSR20/3	TSR30/3	*
4	TSR20L/4	TSR30L/4	TSR20/4	TSR30/4	*
5	TSR20L/5	TSR30L/5	TSR20/5	TSR30/5	*
6	TSR20L/6	TSR30L/6	TSR20/6	TSR30/6	*
7	TSR20L/7	TSR30L/7	TSR20/7	TSR30/7	*
8	TSR20L/8	TSR30L/8	TSR20/8	TSR30/8	*
9	TSR20L/9	TSR30L/9	TSR20/9	TSR30/9	*
10	TSR20L/10	TSR30L/10	TSR20/10	TSR30/10	*
11	<b>CONTACT SPT@SPINLOCK.CO.UK</b>				

## \* CONTACT OUR SPECIAL PROJECTS TEAM FOR:

- Custom sheave spacing (at no additional cost)
- Large organisers up to 1m / 25 sheaves
- Very high load organisers with 44mm sheaves
- Titanium options available
- Custom sheave combinations

**SPT@SPINLOCK.CO.UK**

## TSF ENDLESS LINE ORGANISER

High load Organiser with opening access

Organiser with opening access for endless lines where code sails will be removed from deck

20mm diameter alloy sheaves

Sheave height reduced to maximise sheave load

Very low profile design




All rotating sheaves with plain bearings

Alloy top plate






# TSR ORGANISER FOR LEADING HIGHLY LOADED LINES

## TSR20

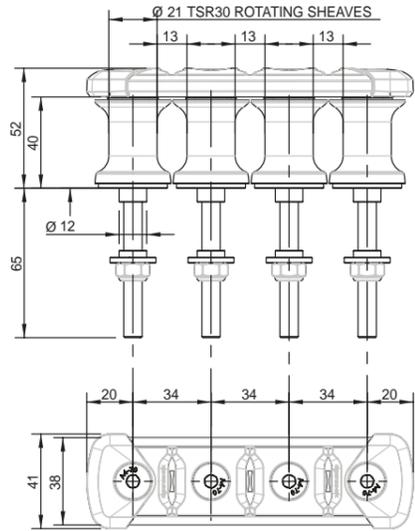




Sheave spacing: Standard product sheave spacing shown  
Custom spacing available in 1.0mm increments at no additional cost

## TSR20L

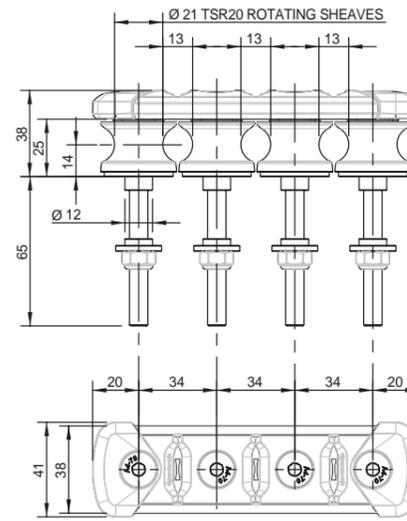




Sheave spacing: Standard product sheave spacing shown  
Custom spacing available in 1.0mm increments at no additional cost

## TSR30

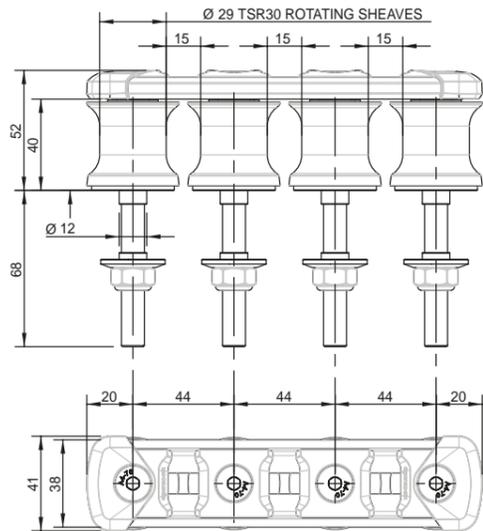

Sheave spacing: Standard product sheave spacing shown  
Custom spacing available in 1.0mm increments at no additional cost

## TSR30L

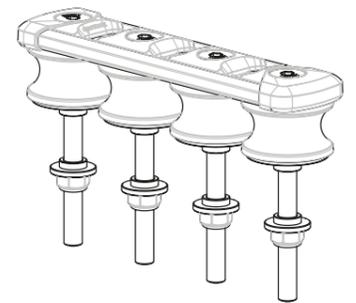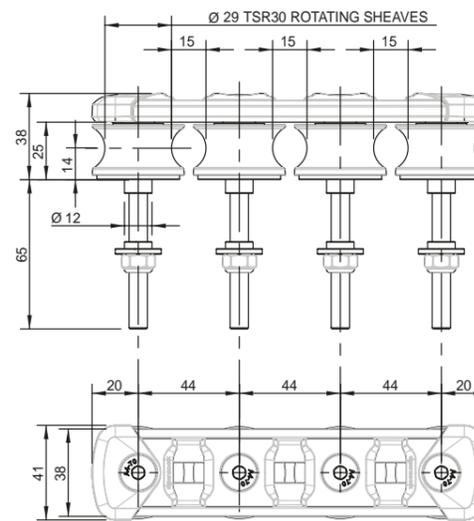

Sheave spacing: Standard product sheave spacing shown  
Custom spacing available in 1.0mm increments at no additional cost

### When to use Titanium?

Specify titanium when weight saving is premium


### When to use low sheave TSRL?

Use low sheave versions where space is restricted such as in-deck tunnel systems and mast bases


### When to use larger diameter 30mm sheaves?

Use 30mm sheaves for diverting highly loaded lines, diverting large deflections and large diameter lines

Maximum Loads	TSR20 & TSR20L
SHEAVE LOAD	1500kg
TOTAL COMBINED SHEAVE LOAD	750kg x number of sheaves
30° DEFLECTED ROPE LOAD	3000kg
60° DEFLECTED ROPE LOAD	1500kg



Maximum Loads	TSR30 & TSR30L
SHEAVE LOAD	2500kg
TOTAL COMBINED SHEAVE LOAD	1250kg x number of sheaves
30° DEFLECTED ROPE LOAD	5000kg
60° DEFLECTED ROPE LOAD	2500kg



# TWR SHEAVE RANGE


## LOW PROFILE, HIGH LOAD DIVERTER



Our TWR Organiser is a development of our successful TSR Organiser Range, offering a high load, single line diverter for lines up to a massive 2.5 tonnes.

### FEATURES

- Single sheave in 30mm and 44mm diameter
- Low profile design with minimal friction from vertical deflection
- Full rotating sheave with faired-in top plate
- 2.5 tonnes maximum sheave load
- Simple on-deck servicing
- Central shaft designed to spread load through laminate
- Titanium parts available to further reduce weight
- Competitively priced

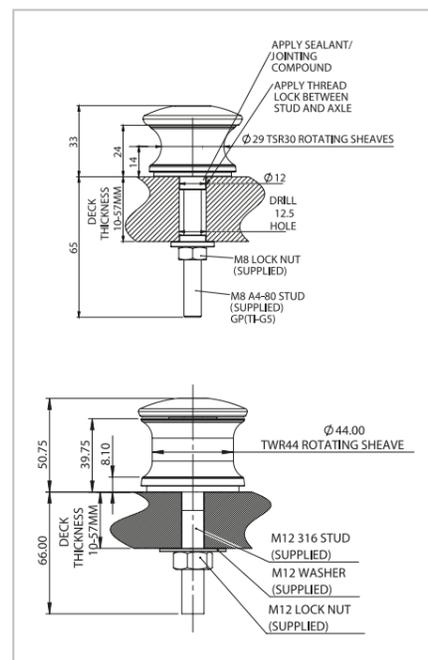

Model	Description	SWL	Max Line Dia
TWR/30	Single 30mm sheave	2000kg	16mm
TWR/44	Single 44mm sheave	2500kg	24mm

# TWF WINCHFEEDEER

## FOR DIVERTING LINES



### FEATURES

- Fit a winchfeeder aft of a clutch or jammer to divert lines to an alternative winch
- Useful for leading a line from a clutch on one side to an alternative winch
- Very low 25mm (1") profile keeps winchfeeders safely out of the traffic



Model	Sheave Dia / Type	SWL per sheave	Max Line Dia
TWF/50M	50mm (2") Alloy	800kg (1760lbs)	12mm (1/2")
TWF/63M	63mm (2 1/2") Alloy	1000kg (2200lbs)	12mm (1/2")

# T25 ORGANISER

## FOR LEADING LINES



### FEATURES

- Fibre-reinforced construction
- Stainless steel 'wear strip' prevents local rope damage
- Symmetric or asymmetric configurations with full range of sheaves
- Stainless steel unlinked base for fitting on curved surfaces which simplifies deck sealing
- Double stack with BE10/2 or BE10/3 for leading additional lines
- Small boat organiser



Model	Sheave Dia/Type	SWL per sheave	Total SWL per unit	Line Dia	Fastener
T25	25mm (1") composite	400kg (880lbs)	No of sheaves x 200kg (440lbs)	10mm (3/8")	M5 CSK (3/16")

# BE10 MULTIPLE BULLSEYE

## FOR STAND ALONE OR USE WITH T25 ORGANISERS



### FEATURES

- Versatile new solution for low loaded lines; either fitted alone or double stacked onto new T25 organisers
- Integral stainless steel eye construction
- Grouped format minimises the deck space for multiple lines
- Shape deflects easily to fit concave or convex surfaces
- BE10/2s and 3s stack anywhere on the T25 organiser providing a very neat new rope management solution



For Single Bullseye See page 37

Model	Description
BE10/2	Double 10mm bullseye
BE10/3	Triple 10mm bullseye

# T38, T50 & TC50 ORGANISERS FOR LEADING LINES



T-Series Organisers guide multiple lines from the mast to banks of clutches or jammers

Lines up to 14mm (9/16")

Loads up to 1500kg (3300lbs)



## FEATURES

Minimal overall length

Efficient bearings surface reduces winch effort and increases halyard life

Integral end fairings for safe side loading


Asymmetric version reduces deck footprint and saves weight

T38 and T50 can 'stack' for limited deck area or adding extra capacity. T50 will also 'stack' on TC50

Vari-camber feature: all T38 and T50 versions are designed to follow the curve of the deck when fitted

TC50 Organisers are specially developed for higher loads

Model	Sheave Dia/ Type	SWL per sheave	Total SWL per unit	Max Line Dia
T38	38mm (1 1/2") composite	600kg (1320lbs)	No of sheaves x 300kg (660lbs)	12mm (1/2")
T50	50mm (2") composite	1000kg (2200lbs)	No of sheaves x 500kg (1100lbs)	14mm (9/16")
TC50	50mm (2") alloy	1500kg (3300lbs)	No of sheaves x 750kg (1650lbs)	14mm (9/16")
TC50/D	50mm (2") alloy	1000kg upper (2200lbs) 1500kg lower (3300lbs)	No of sheaves x 500kg (1100lbs) No of sheaves x 750kg (1650lbs)	14mm (9/16")

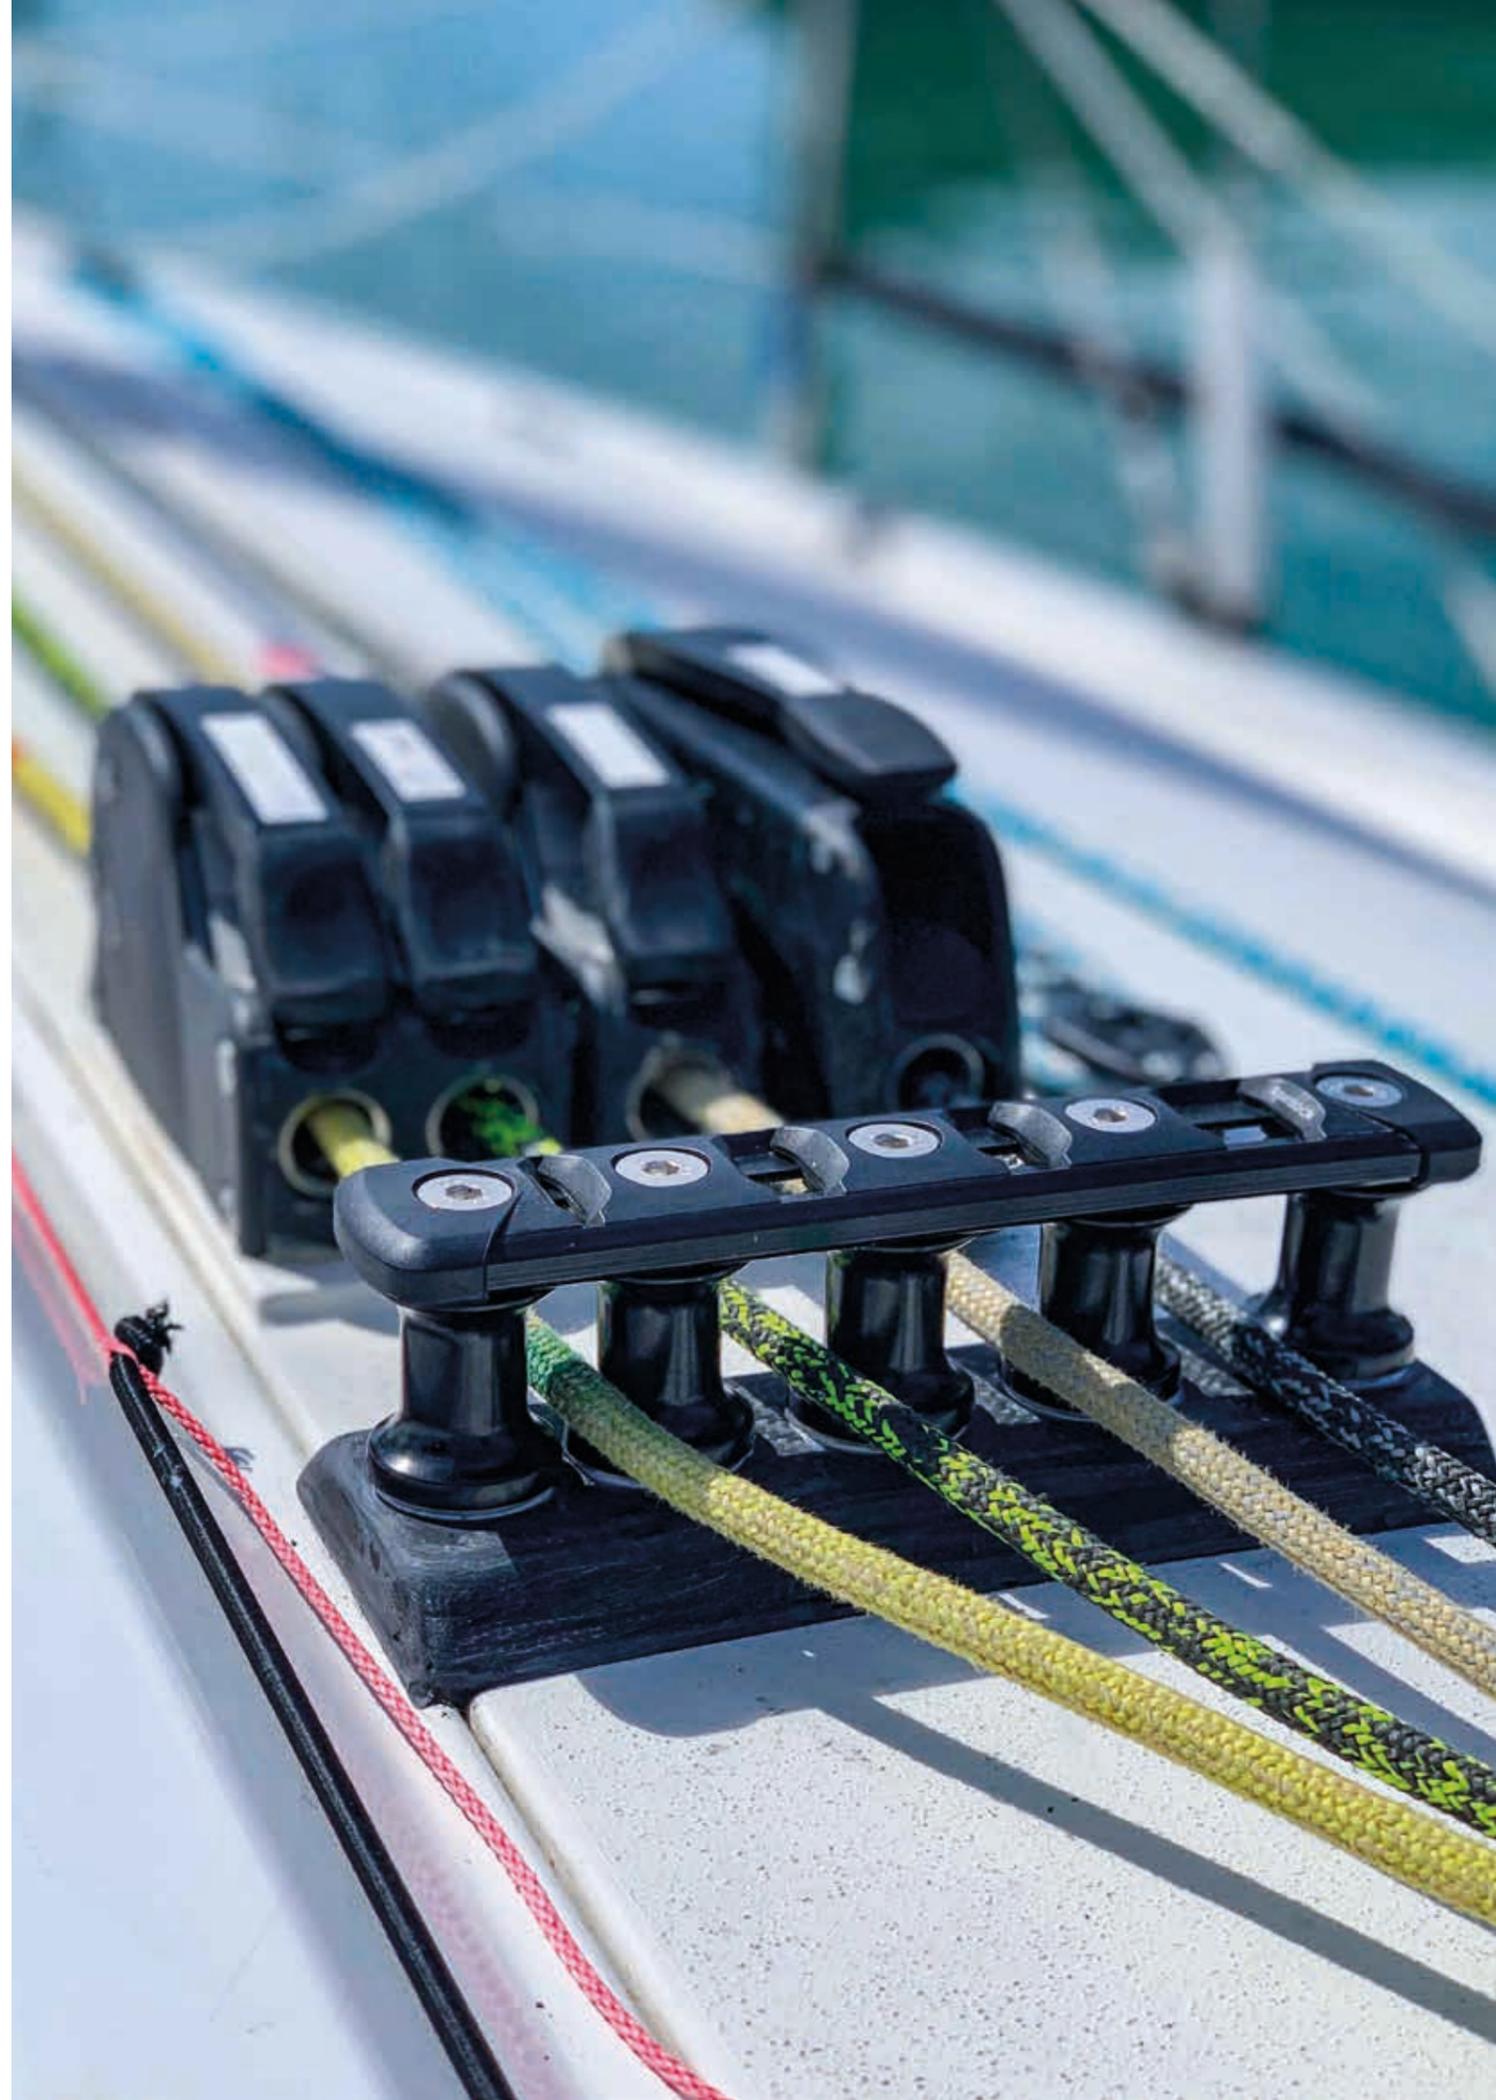




# EAC CARBON TILLER EXTENSION ULTIMATE LIGHTWEIGHT STEERING CONTROL

## FEATURES

- Featherlight in the hand
- Ultimate responsive helm feel
- Spinlock's iconic handle shape for fingertip control
- Lightweight carbon-fibre componentry
- Single piece integrated handle and inner tube
- All parts detailed for minimum weight
- Maximum use of carbon and titanium printed parts
- Production parts 3D printed
- Titanium E-Joint GP with fast-pin for easy removal when not in use
- Satin clearcoat finish
- Available in 900, 1200, 1600 and 2000 lengths
- Custom paint finishes available
- Special order only





Model	Description	Weight
EAC/900	Ultra Lightweight Full Carbon Tiller Extension (600-900mm)	EAC/900 299g (10.55oz)
EAC/1200	Ultra Lightweight Full Carbon Tiller Extension (750-1200mm)	EAC/1200 339g (11.96oz)
EAC/1600	Ultra Lightweight Full Carbon Tiller Extension (950-1600mm)	EAC/1600 406g (14.32oz)
EAC/2000	Ultra Lightweight Full Carbon Tiller Extension (1350-2000mm)	EAC/2000 461g (16.26oz)

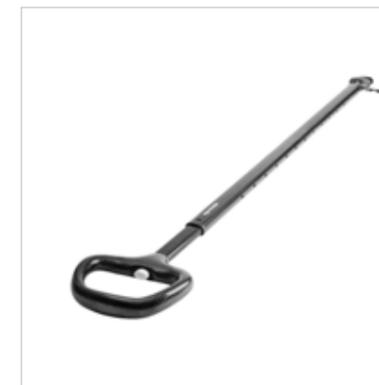

E-DIABOLO E-DIABOLO/J

Convert or replace Spinlock tiller extensions with a Diabolo universal joint. Returns the extension to a vertical position when not in use

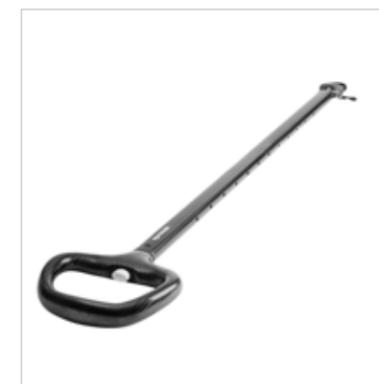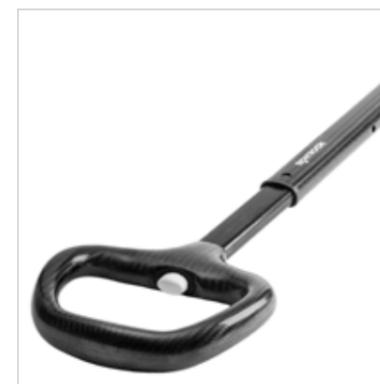

Full Swivel E-Joint with Fastpin: E-JOINT



Compact telescopic extensions shaped for precision helming

## FEATURES

Straight Handle (EJ) or Oval Handle (EA) Telescopic in four standard lengths

Designed for the hardest conditions; to reduce the strain and increase the sheer enjoyment of helming

The Asymmetric grip improves helming performance with:

- More feedback - for accurate and precise control
- More mobility - maintains the best helming position for optimum trim and visibility
- Less fatigue - correct helming position reduces back pain and improves concentration
- Allows two-handed helming with arms relaxed into a more comfortable, elbows-down position

Push-button adjustment with Torlon™ ball locking mechanism

Strong stainless-steel swivel joint for precise control

Removable fast pin for easy stowage

Integral shock absorber

Choose EJ Tiller extension for a slimmer grip and for the smaller cockpit - ideal for hiking and fast tacking

EJ-GRIP can be upgraded to Asymmetric handle (EA) specification or vice-versa

## DIABOLO VERSION

The Diabolo version is preferred by single-handed yachtsmen. A windsurfing-style universal joint returns it to a vertical position when not in use. Ideal for boats predominantly tiller steered by autopilot

Convert or replace Spinlock tiller extensions with a Diabolo universal joint. Returns the extension to a vertical position when not in use

Model	Description
E-DIABOLO	Tiller Extension Universal Diabolo Joint
E-DIABOLO/J	Tiller Extension Universal JUMBO Diabolo Joint



- Matt Black (B)
- Silver (S)
- Matt Orange (R)
- Matt Light Blue (L)
- Matt Yellow (Y)
- Satin Clearcoat Carbon

## SIZES

- 900 Series (600-900mm)
- 1200 Series (750-1200mm)
- 1600 Series (950-1600mm)
- 2000 Series (1350 - 2000mm)



E-DIABOLO & E-DIABOLO/J



E-BUTTON controls telescopic adjustment



E-JOINT

PRODUCT		EA ASYMMETRIC		EJ JOYSTICK		EAC CARBON
CONNECTION		E-JOINT (STAINLESS STEEL)	E-DIABOLO	E-JOINT (STAINLESS STEEL)	E-DIABOLO	E-JOINT (TITANIUM)
3D OVAL HANDLE		✓	✓	-	-	✓
STRAIGHT FOAM GRIP HANDLE		-	-	✓	✓	-
E-GRIP		OPTIONAL	-	OPTIONAL	-	OPTIONAL
MATERIAL		ALUMINIUM	-	ALUMINIUM	-	-
SILVER ANODISED	○	EA/900S	EA/900DS	EJ/900S	EJ/900DS	-
	○	EA/1200S	EA/1200DS	EJ/1200S	EJ/1200DS	-
	○	EA/1600S	EA/1600DS	EJ/1600S	-	-
	○	EA/2000S	-	EJ/2000S	-	-
MATT BLACK	●	EA/900B	EA/900DB	EJ/900B	EJ/900DB	-
	●	EA/1200B	EA/1200DB	EJ/1200B	EJ/1200DB	-
	●	EA/1600B	-	-	-	-
	●	EA/2000B	-	-	-	-
MATT YELLOW	●	EA/900Y	EA/900DY	EJ/900DY	EJ/900DY	-
	●	EA/1200Y	EA/1200DY	EJ/1200Y	EJ/1200DY	-
MATT BLUE	●	EA/900L	EA/900DL	EJ/900L	EJ/900DL	-
	●	EA/1200L	EA/1200DL	EJ/1200L	EJ/1200DL	-
MATT ORANGE	●	EA/900R	EA/900DR	EJ/900R	EJ/900R	-
	●	EA/1200R	EA/1200DR	EJ/1200R	EJ/1200DR	-
CLEARCOAT CARBON	●	-	-	-	-	EAC/900*
	●	-	-	-	-	EAC/1200*
	●	-	-	-	-	EAC/1600*

\*Custom finish also available

## TILLER EXTENSION BAGS

Protective bags for your EA and EAC tiller extension - Available in 900, 1200, 1600 and 2000 lengths  
Dual zip enables opening at both ends with Rugged, hard-wearing fabric



# EJB TILLER EXTENSION

UNIQUE HELMING PRECISION



The latest in lightweight, precision helming



## FEATURES

- Strong, lightweight anodised aluminium tube
- 360° control - 'Spinflex'™ joint swivels freely through the full 360° arc
- 'Spinflex'™ holds tiller in helming position, 30° above horizontal for fast, high agility helming
- The Spinflex™ joint is uniquely pre-moulded at a 30° angle to reduce the bending stress both in use and at rest. It is this induced stress that leads to early failures on most vertically mounted joints
- UV resistant, extra tough 'Spinflex'™ joint
- Triple-wave handle gives a choice of secure grip positions
- Responsive 'feel' and precise helm control
- Less wrist and grip fatigue
- 3 lengths – 600mm, 900mm and 1400mm
- Hole centres allow:
  - upgrade to Spinlock EJ or EA models
  - retrofit from other extension types
- EJB Joint will fit tubes with inner dimensions 13.5mm

Specifications	Length
EJB/600B	600mm (23 <sup>5</sup> / <sub>8</sub> "
EJB/900B	900mm (35 <sup>7</sup> / <sub>16</sub> "
EJB/1400B	1400mm (55 <sup>1</sup> / <sub>8</sub> "
EJB-CLIP	Retaining Clip
EJB-JOINT	Replacment Spinflex Joint
EJB-KIT	Clip and Joint

# WL LINE LEADS

COMPACT STANCHION LEAD SYSTEMS



Lines up to 12mm (1/2")  
Stanchion ø 25mm (1")

## FEATURES

- Compact furling line guide system
- Reduces line friction during furling
- Fairlead model WL/1 straight line guide for intermediate stanchions
- Sheave model WL/2 for line entry and exit stanchions with unique tracker-ball angle adjuster for perfect sheave alignment
- Complete with fastenings - easy to fit
- Replacement sheave for WL/2 available

Model	Line Dia	SWL at max line diameter
WL/1	12mm (1/2")	300kg (660lbs)
WL/2	12mm (1/2")	300kg (660lbs)



# BE BULLSEYE

LOW PROFILE CONTROL LINE GUIDES



Improves any deck layout

Lines up to 16mm (5/8")

## FEATURES

- For guiding lines between two fixed points requiring little horizontal or vertical deflection
- Guides extra lines to the cockpit cleats and clutches when no organiser sheaves are available
- Double screw fitting (except BE06)
- Stainless steel rope guide
- 6mm, 10mm, 12mm and 16mm sizes
- Low profile avoids snagging
- Integral gasket sealed base

Model	Max Line Dia
BE06	6mm (1/4")
BE10/TF	10mm (3/8")
BE12/TF	12mm (1/2")
BE16/TF	16mm (5/8")



For Multiple Bullseye  
See page 29

# BRS SPINNAKER BLOCK CONTROLLED SPINNAKER HANDLING



## FEATURES

- Attached with webbing strop, positioned on the toe rail or padeye
- No drilling, no clutter on deck
- Cam profiled to hold loads up to 20% of the block SWL
- Plain bearing sheave provides smooth running at low loads
- Excellent durability at high loads
- Strop allows fullest rotation for spinnaker sheet use



This jammer block is for situations where a fixed foot block cannot help: peeling spinnakers or changing a sheet block

Model	Sheave Dia	SWL (Sheave)	Safe Cam Load	Line Dia
BRS/50	50mm (2")	800kg (1760lbs)	160kg (352lbs)	6-10mm (1/4-3/8")
BRS/63*	63mm (2 1/2")	1200kg (2640lbs)	240kg (528lbs)	8-12mm (5/16-1/2")

\* Alloy sheave

# SUA MINI JAMMER FOR USE WITH SMALLER WINCHES




Popular halyard jammer for smaller decks. More power than a camcleat, smaller than a powerclutch



Model	Line Dia	SWL at max line diameter
SUA/1	6-10mm (1/4-3/8")	400kg (880lbs)
SUA/2	6-10mm (1/4-3/8")	400kg (880lbs)
SUA/3	6-10mm (1/4-3/8")	400kg (880lbs)

# RF SAILFEEDER PRECISION SAIL GUIDES

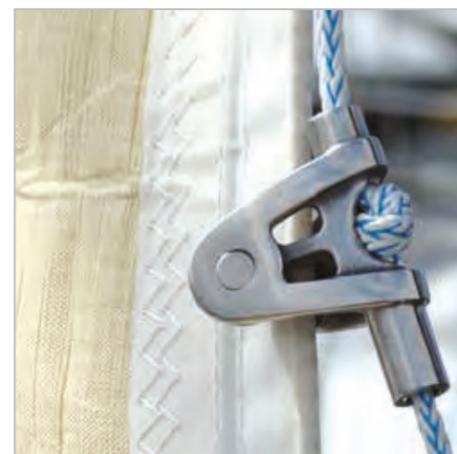

## FEATURES

- Graphite loaded, anodised alloy rollers
- Reduced weight for same strength
- Electro Polished 17-4PH high grade stainless steel
- One piece precision investment casting for ultimate strength
- Mainsail feeder RF/MA locates in the mast track below the luff entry and protects luff tape during the hoist. No drilling is needed
- Headsail feeder RF/H guides any flaked genoa from the deck cleanly up into the foil
- Headsail feeders are supplied with a length of line for attachment in their correct free pivoting position between luff entry and deck
- RF/H2 for 60 feet plus racing yachts

New sailfeeders for fast, precise, smooth sail hoists

Model	Tape measurement
RF/MA	Mainsail 11mm (1/8")
RF/H	Headsail 7mm (1/4")
RF/H2	Headsail 7mm (1/4")



# ATCU THROTTLE CONTROL RACEBOAT THROTTLE SOLUTION



## FEATURES

- Converts a standard Teleflex™ throttle to a flush socket unit
- Provides removable handle, eliminating risk of line snags when sailing
- Allows the engine control to be located in the best position for the helmsman
- Custom handle option (ATCU-LVR) recommended for a perfect fit
- The ATCU/1 faceplate is designed to fit Teleflex™ model B700B (Teleflex™ unit not supplied)

Model	Contents
ATCU/1*	Faceplate
ATCU/1+*	Faceplate with custom lever
ATCU-LVR	Custom lever

\* For assembly with unused control units only



## PXR CAM CLEAT

PAGE 8-9

PXR-BRACKET Mast mount for PX & PXR

## XAS POWERCLUTCH

PAGE 10-11

### XAS & XA ACCESSORIES

CAM-XAS Standard replacement cam  
 X-LBL Handle Labels English, French & German  
 SA29 Spring Arm  
 XAS-BASE0408 Base upgrade for smaller diameter line  
 XAS-BASE0612 Base upgrade

### XAS ACCESSORIES

XAS-SMNT Sidemount kit (including fasteners)  
 XAS-HDL Handle  
 XAS-SIDE Side fairings  
 XAS-KIT Base, cam, sides & handle

## XTS & XCS POWERCLUTCH

PAGE 12-13

### XTS, XCS, XT & XC ACCESSORIES

CAM-0610 Cam upgrade for 6-10mm line  
 CAM-0610C Ceramic Cam upgrade for 6-10mm line  
 CAM-0814 Cam upgrade for 8-14mm line  
 CAM-0814C Ceramic Cam upgrade for 8-14mm line  
 CAM-1216B Cam upgrade for 12-16mm line - XCS & XC only  
 CAM1216C Ceramic cam upgrade for 12-16mm line - XCS and XC only  
 CAM-0812L Lock-up cam upgrade 8-12mm line  
 CAM-1214L Lock-up cam upgrade 12-14mm line  
 X-BASE Replacement Base XTS & XCS Clutches  
 X-BASEC Ceramic coated base for XTS & XCS models  
 X-HDL Black aluminium handle  
 XTS-KIT Base, cam and handle  
 Z-LBL High spec, high visibility handle labels  
 X-LBL Handle labels English, French & German  
 XTS-SIDE Plastic side fairings for XTS (pair)  
 XTS-SMNT Converts standard XTS for side mounting  
 XCS-SMNT Converts standard XCS for side mounting

## XTS & XCS ACCESSORIES

XTS-KIT XTS Clutch Service Kit with 8-14mm rope range cam module, base and handle  
 XTS-KIT0610 XTS Clutch Service Kit with 6-10mm rope range cam module, base and handle  
 XTS-KIT0610C XTS/XCS Clutch Upgrade Kit - CERAMIC 6-10mm Cam Module & Base, plus Light Weight handle.  
 XTS-KIT0814C XTS/XCS Clutch Upgrade Kit - CERAMIC 8-14mm Cam Module & Base, plus Light Weight handle.

## XT & XC ACCESSORIES

X-SIDE Plastic side fairings for XT only (pair)

## XTR POWERCLUTCH

PAGE 16

XTR-KIT Handle and cam/base module for 8-12mm  
 XTR-HDL XTR Handle  
 XTR-CAM0812 Cam/base module 8-12mm  
 XTR-SMNT Converts standard XTR for side mounting

## ZR JAMMER

PAGE 17

ZR-JAW10 Jaw assembly for ZS1014

## XXA, XXB and XXC POWERCLUTCH

PAGE 18-19

XX-KIT Jaw assembly for XX0812  
 XX-ROLL Standard roller set  
 XX-ROLL+ TORLON™ roller set  
 XX-MLDG Moulding kit for models 2010+  
 XX-HDLB Handle assembly (black) for XXA and XXB  
 XX-LOCK XX0812 Lock open kit  
 XXB-KIT Jaw assembly for XXB0812  
 XXC-KIT Jaw assembly for XXC0812  
 XXC-HDLB Black Handle Kit  
 XXC-HDLS Silver Handle Kit  
 XXC-SMNT Side Mount Kit

## ZXB POWERJAMMER

PAGE 20

ZXB-JAW12 ZXB Jammer 8-12mm Jaw Grips Ceramic  
 ZXB-KIT12 ZXB Jammer replacement Jaws, Bearings, Rear Cover and Toggle/Latch Assembly  
 ZX-BRG12 ZXB Jammer 8-12mm PTFE Bearings  
 ZX-MLDG12 ZXB Jammer 8-12mm Moulding Set

## ZS POWERJAMMER

PAGE 20-21

ZS-JAW08 ZS0810 Jaw Assembly  
 ZS-JAW08HC ZS0810 'Ceramic' Jaw Assembly  
 ZS-JAW12 ZS1214 and ZS1014C 'P' Series Jaw Assembly  
 ZS-JAW12HC ZS1214 and ZS1014C 'Ceramic' Jaw Assembly  
 ZS-JAW16 ZS1618 and ZS1618C 'P' Series Jaw Assembly  
 ZS-JAW16HC ZS1618 and ZS1618C 'Ceramic' Jaw Assembly  
 ZS-JAW18 ZS1824C 'P' Series Jaw Assembly  
 ZS-JAW18C ZS1824C 'Ceramic' Jaw Assembly  
 ZS-MNT0810 Alloy mounting plate  
 ZS-MNT1214 Alloy mounting plate  
 ZS-MNT1618 Alloy mounting plate  
 ZS-MNT1014C Alloy mounting plate  
 ZS-MNT1618C Alloy mounting plate  
 ZS-MNT1824C Alloy mounting plate  
 Z-LBL High spec, high visibility handle labels  
 ZS-HDL ZS1014C & ZS1214 handle only

## TSR ORGANISER

PAGE 24-27

TSR20-RL/2 Rail Pair(2) for 2 x 20mm Sheave (1 rope) with min sheave spacing  
 TSR20-RL/3 Rail Pair(2) for 3 x 20mm Sheave (2 rope) with min sheave spacing  
 TSR20-RL/4 Rail Pair(2) for 4 x 20mm Sheave (3 rope) with min sheave spacing  
 TSR20-RL/5 Rail Pair(2) for 5 x 20mm Sheave (4 rope) with min sheave spacing  
 TSR20-RL/6 Rail Pair(2) for 6 x 20mm Sheave (5 rope) with min sheave spacing  
 TSR20-RL500 Rail Pair(2) 500mm long each rail  
 TSR20-RL1000 Rail Pair(2) 1000mm long each rail  
 TSR20/SHV TSR20 Sheave Assembly - Single  
 TSR20/LSHV TSR20 Sheave Assembly - Single  
 TSR20L-ESHV TSR20L End Sheave Assembly - Pair  
 TSR20L-ESHVF TSR20L End Sheave Assembly Fixed - Single  
 TSR30/SHV TSR20 Sheave Assembly - Single  
 TSR30/LSHV TSR20 Sheave Assembly - Single  
 TSR30L-ESHV TSR20L End Sheave Assembly - Pair  
 TSR30L-ESHVF TSR20L End Sheave Assembly Fixed - Single

## T-SERIES ORGANISER

PAGE 29-30

TB17 Composite 38mm (1 1/2") TB series only (pre 2002)  
 T38-C Composite 38mm (1 1/2") T38 series only  
 T38-A Alloy 38mm (1 1/2") T38 series only  
 T50-C Composite 50mm (2") T50 or TA (pre 2002)  
 T50-A Alloy 50mm (2") T50 or TA (pre 2002)  
 T50-END T50 Plastic End Cap Moulding (Pair)  
 T38-END T38 Plastic End Cap Moulding (Pair)

## EA & EJ TILLER EXTENSION

PAGE 34-35

EA-HDL Handle option asymmetric  
 EJ-HDL Handle option parallel  
 E-GRIP Tube sleeve grip  
 E-DIABOLO Stand up universal joint  
 E-JOINT Full swivel joint with fastpin  
 E-SHOCK Shock absorber  
 E-SLEEVE Replacement pivot housing  
 E-FASTPIN Full swivel joint release pin  
 E-BUTTON Control button  
 E-CLIP Tiller clip for all models  
 E-KIT Button, clip and sleeve

## EJB TILLER EXTENSION

PAGE 36

EJB-CLIP Retaining Clip  
 EJB-JOINT Replacement Spinflex™ Joint  
 EJB-KIT

## WL FURLING LINE LEAD

PAGE 37

WL-SHEAVE Replacement sheave for WL/2

## BRS SPINNAKER BLOCK

PAGE 38

BRS-STROP Replacement strop for both models

## ATCU THROTTLE CONTROL

PAGE 39

ATCU-LVR Custom lever for throttle control

# WEIGHTS & FASTENERS

PAGE	PRODUCT	MODEL	WEIGHT	FASTENERS	SUPPLIED	CSK HEAD	PAN HEAD	STUD	HEX HEAD
23	PD PADEYE	PD/6C	75g (2.6oz)	2 x M6 (1/4")	✓	-	-	-	-
		PD/8C	142g (5.0oz)	2 x M8 (5/16")	✓	-	-	-	-
		PD/10C	244g (8.6oz)	2 x M10 (3/8")	✓	-	-	-	-
		PD/12C	385g (13.5oz)	2 x M12 (1/2")	✓	-	-	-	-
24	TSR SERIES ORGANISER	TSR	for details contact spt@spinlock.co.uk		✓	✓	-	-	-
28	TWR SHEAVE RANGE	TWR/30	138g (4.9oz)	1 x M8 (5/16")	✓	-	-	-	-
		TWR/44	280g (9.9oz)	1 x M12 (1/2")	✓	-	-	-	-
28	TWF WINCHFEEDER	TWF/50M	200g (7.0oz)	1 x M10 (3/8")	✓	-	-	-	-
		TWF/63M	325g (11.4oz)	1 x M12	✓	-	-	-	-
29	T25 ORGANISER	T25	64g (2.2oz) for 2 M5 (3/16") 20g (0.7oz) per extra sheave		-	✓	✓	-	-
29	BE MULTIPLE BULLSEYE	BE10/2	16g (0.6oz)	2 x M5 (3/16")	-	✓	-	-	-
		BE10/3	24g (0.9oz)	2 x M5 (3/16")	-	✓	-	-	-
30	T SERIES ORGANISER	T38	115g (4.0oz) for 2 M6 (1/4")		-	✓	-	-	-
		T50	185g (6.5oz) for 2 M8 (5/16")		-	✓	-	-	-
		TC50	575g (20.1oz) for 2 M8 (5/16") (A4-80)		✓	✓	-	-	-
		TC50/D	750g (26.3oz) for 2 M8 (5/16") (A4-80)		✓	✓	-	-	-
33	EAC CARBON TILLER EXTENSION	EAC/900	299g (10.55oz)	2 x M5 (3/16")	✓	✓	-	-	-
		EAC/1200	339g (11.96oz)	2 x M5 (3/16")	✓	✓	-	-	-
		EAC/1600	406g (14.32oz)	2 x M5 (3/16")	✓	✓	-	-	-
		EAC/2000	461g (16.26oz)	2 x M5 (3/16")	✓	✓	-	-	-
34	EA TILLER EXTENSION	EA/900S	690g (24.2oz)	2 x M5 (3/16)	✓	✓	-	-	-
		EA/1200S	780g (27.3oz)	2 x M5 (3/16)	✓	✓	-	-	-
		EA/1600S	800g (1lb 12oz)	2 x M5 (3/16)	✓	✓	-	-	-
		EA/2000S	900g (1lb 15oz)	2 x M5 (3/16)	✓	✓	-	-	-
35	EJ TILLER EXTENSION	EJ/900S	445g (15.6oz)	2 x M5 (3/16)	✓	✓	-	-	-
		EJ/1200S	510g (17.9oz)	2 x M5 (3/16)	✓	✓	-	-	-
		EJ/1600S	800g (1lb 12oz)	2 x M5 (3/16)	✓	✓	-	-	-
		EJ/2000S	900g (1lb 15oz)	2 x M5 (3/16)	✓	✓	-	-	-
36	EJB TILLER EXTENSION	EJB/600B	125g (4.4oz)	2 x M5 (3/16")	-	-	✓	-	-
		EJB/900B	170g (6.0oz)	2 x M5 (3/16")	-	-	✓	-	-
		EJB/1400B	255g (8.9oz)	2 x M5 (3/16")	-	-	✓	-	-
37	WL FURLING LINE LEAD	WL/1	40g (1.4oz)	Stanchion: 25mm (1")					
		WL/2	70g (2.5oz)	Stanchion: 25mm (1")					
37	BE BULLSEYE	BE06	5g (0.18oz)	1 x M4 (5/32")	-	✓	-	-	-
		BE10/TF	8g (0.28oz)	2 x M4 (5/32")	-	✓	-	-	-
		BE12/TF	14g (0.49oz)	2 x M5 (3/16")	-	✓	-	-	-
		BE16/TF	35g (1.2oz)	2 x M6 (1/4")	-	✓	-	-	-


# WEIGHTS & FASTENERS

PAGE	PRODUCT	MODEL	WEIGHT	FASTENERS	SUPPLIED	CSK HEAD	PAN HEAD	STUD	HEX HEAD
38	BRS SPINNAKER BLOCK	BRS/50	250g (8.8oz)	Soft attachment	-	-	-	-	-
38	SUA MINI JAMMER	SUA/1	170g (6.0oz)	4 x M6 (1/4")	-	-	✓	-	-
		SUA/2	250g (8.8oz)	4 x M6 (1/4")	-	-	✓	-	-
		SUA/3	350g (12.3oz)	4 x M6 (1/4")	-	-	✓	-	-
39	RF SAILFEEDER	RF/MA	136g (4.8oz)	Sail: Mainsail Tape: 11mm (7/16")					
		RF/H	140g (4.9oz)	Sail: Headsail (single) Tape: 7mm (1/4")					
		RF/H2	219g (7.7oz)	Sail: Headsail Tape: 7mm (1/4")					
39	ATCU ENGINE THROTTLE CONTROL	ATCU/1	260g (9.1oz)	4 x M5 (3/16")	✓	✓	✓	-	-
		ATCU/1+	380g (13.3oz)	4 x M5 (3/16")	✓	✓	✓	-	-
		ATCU-LVR	107g (3.8oz)	-	-	-	-	-	-




# WEIGHTS, FASTENERS & DIMENSIONS

ALL TECHNICAL DATA IS AVAILABLE AT [SPINLOCK.CO.UK](http://SPINLOCK.CO.UK) AND [PROSUPPORT@SPINLOCK.CO.UK](mailto:PROSUPPORT@SPINLOCK.CO.UK)

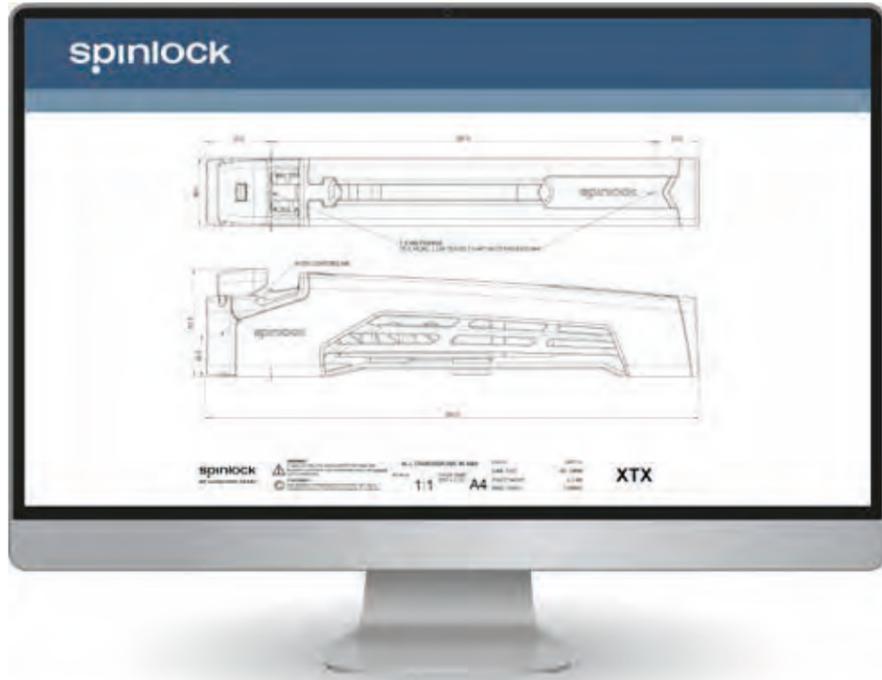


# DIMENSIONS

PAGE 8-9  
PXR CAM CLEAT





PXR0206




PXR0810

PXR0206/SW



3 HOLES M5  
EQUI-SPACED ON PCD 31.0




PXR0810/SW




3 HOLES M5  
EQUI-SPACED ON PCD 31




PXR0206/T





PXR0810/T

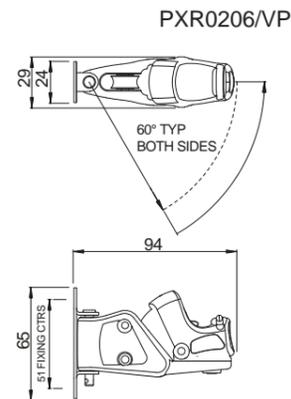


PXR0206/VP

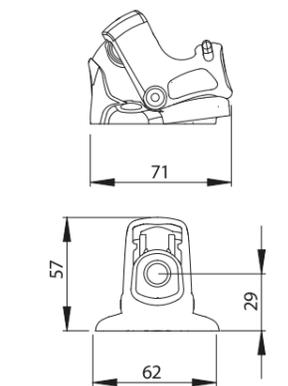


PAGE 10-11  
XAS POWERCLUTCH

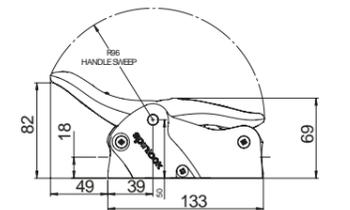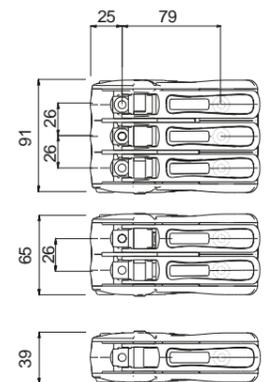

XAS  
Side mount

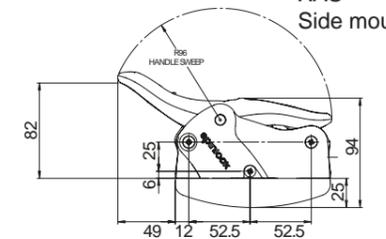

PXR MAST BRACKET

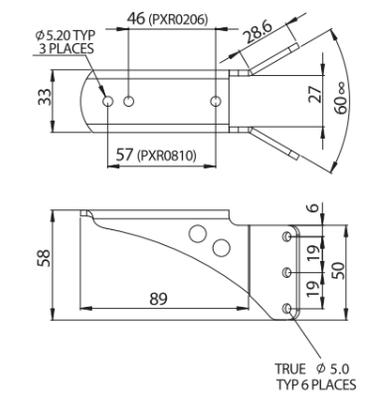


PX dimensions available online at [www.spinlock.co.uk](http://www.spinlock.co.uk)

Drawings not to scale: Do not use as drill templates




# DIMENSIONS

PAGE 29  
T25 ORGANISER

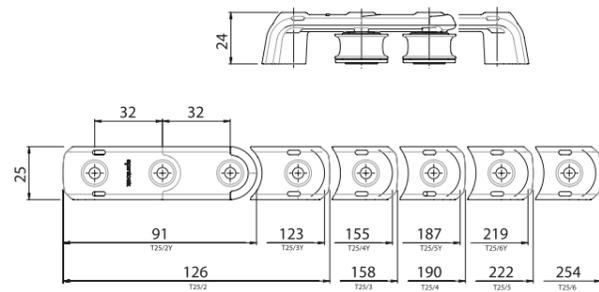


PAGE 30  
T SERIES ORGANISER


Symmetric & Asymmetric versions

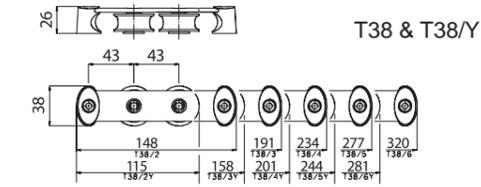


T50 & T50/Y

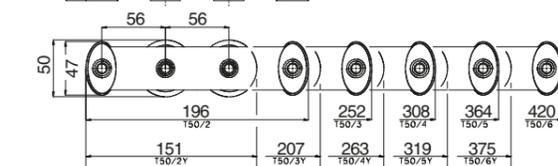


TC50

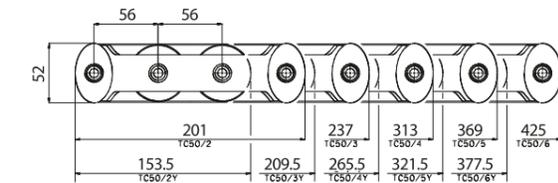



TC50/D




PAGE 29  
BE MULTIPLE BULLSEYE




BE10/2



BE10/3




PAGE 34-35  
EA & EJ TILLER EXTENSION

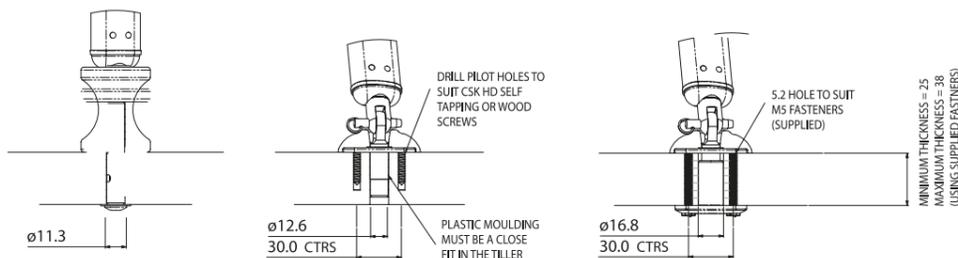


Drawings not to scale: Do not use as drill templates

PAGE 36  
EJB TILLER EXTENSION




PAGE 37  
WL LINE LEAD

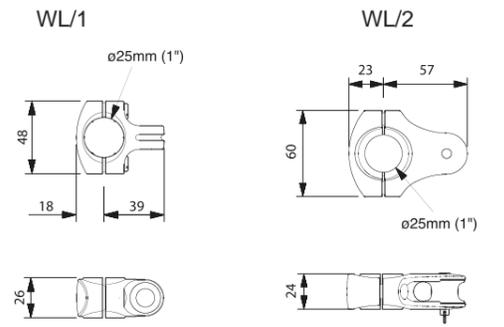


PAGE 37  
BE BULLSEYE

BE06

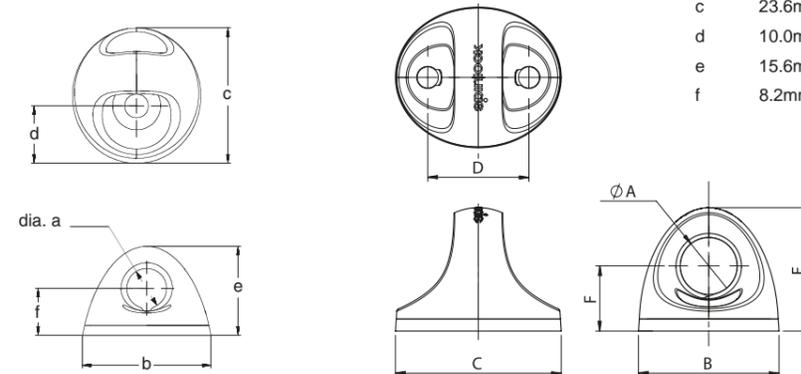


	BE06	BE10/TF	BE12/TF	BE16/TF
a	7.0mm	11.0mm	13.5mm	17.0mm
b	22.5mm	27.8mm	33.3mm	39.3mm
c	23.6mm	32.8mm	39.3mm	52.4mm
d	10.0mm	20.0mm	24.0mm	32.0mm
e	15.6mm	24.4mm	29.3mm	39.0mm
f	8.2mm	12.8mm	15.5mm	20.5mm

PAGE 38  
BRS SPINNAKER BLOCK

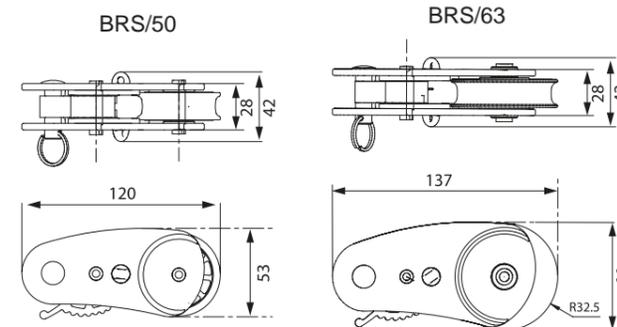

PAGE 38  
SUA MINI JAMMER

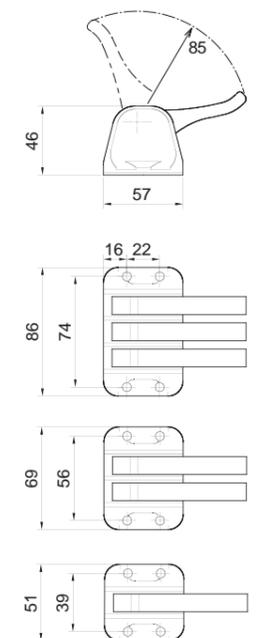

Drawings not to scale: Do not use as drill templates



**PROTECT**  
NO LIMITS


PRODUCT	DECKVEST VITO	DECKVEST 6D	DECKVEST LITE+	DECKVEST LITE	DECKVEST LITE USCG	DECKVEST CENTO	DECKVEST NEMO+		AERO-PRO PFD	WING & FOIL PFD	ALTO BELT PACK		DURO SOLAS	DURO SOLAS+	DURO	DURO+
<b>RECOMMENDED FOR:</b>	Technical offshore lifejacket with hydrostatic inflation and optional Harness Release System. Developed from our work with the Volvo Ocean Race	All sailors who require a full specification offshore lifejacket front opening and optional Harness Release System	For those wanting an ultra lightweight lifejacket with the added security of a deck harness	Ultra lightweight lifejacket for fast craft, all sail & powerboats. Ideal for inshore & coastal waters	USCG approved lightweight lifejacket for fast craft, all sail & powerboats. Ideal for inshore & coastal water	Junior lifejacket harness for kids approximately 8-15 years old who weigh 20-50kg	Buoyant 150N lifejacket and harness in two junior sizes: Infant >15kg and Child 15-30kg		50N performance flotation for high agility dinghy, multihull and keelboat sailing	Ultra lightweight 50N flotation for keelboat, dinghies, RIBs and watersports	75N inflatable buoyancy aid for tenders, SUP, kayaks, RIBs & other inshore water activities. ISO 12402-6 : 2020 – Special Application Lifejacket		275N twin chamber lifejacket for marine professionals requiring SOLAS approved flotation	275N twin chamber lifejacket with deck harness for marine professionals requiring SOLAS approved flotation	170N/275N lifejacket designed for commercial and marine professionals	275N lifejacket with deck harness designed for commercial and marine professionals
50N BUOYANCY	-	-	-	-	-	-	-		✓	✓	✓ (75N actual)		-	-	-	-
100N BUOYANCY	-	-	-	-	-	✓	-		-	-	-		-	-	-	-
150N BUOYANCY	-	-	-	-	-	-	✓		-	-	-		-	-	-	-
170N BUOYANCY	✓	✓	✓	✓	✓	-	-		-	-	-		-	-	✓	-
275N BUOYANCY	✓	✓ Black	✓ Black	-	-	-	-		-	-	-		-	-	✓	✓
275N TWIN CHAMBER	-	-	-	-	-	-	-		-	-	-		✓	✓	-	-
PRO SENSOR ELITE	-	✓	-	-	-	-	-		-	-	-		-	-	✓	✓
UML MK5	-	-	✓	✓	-	✓	-		-	-	-		✓	✓	✓ Standard	-
HAMMAR®	✓	-	-	-	-	-	-		-	-	-		-	-	-	-
HALKEY ROBERTS V95000 PRO HYDRO	-	-	-	-	✓	-	-		-	-	-		-	-	-	-
HALKEY ROBERTS V87000M (MANUAL)	-	-	-	-	-	-	-		-	-	✓		-	-	-	-
SIZE	One Size	One Size	One Size	One Size	One Size	One Size	-		S, M, L	XS, S, M, L, XL	One Size		One Size	One Size	One Size	One Size
COLOUR	●	●○●● Colours 170N only	●●	●●●●●●●●	●●○●●●	●●●	●●●●		●	●●●●	●●●●●●●●		●	●	●●	●
PRODUCT WEIGHT	170N-1240g (2lb 12oz) 275N- 1500g (3lbs 5oz)	170N-1300g (2lb 9oz) 275N-1500g (3lbs 5oz)	860g (1lb 14.3oz)	860g (1lb 14.3oz)	860g (1lb 14.3oz)	720g (1lb 9.4oz)	-		730g (1lb 9.7oz)	470g (1lb 0.6oz)	376g (13.3oz)		2002g (4lb 6.6oz)	2005g (4lb 6.7oz)	170N-950g (2lb 1.5oz) 275N-1250g (2lb .1oz)	950g (2lb 1.5oz)
DECK HARNESS	✓	✓	✓	-	-	✓	✓		-	-	-		-	✓	-	✓
HARNESS RELEASE SYSTEM (HRS™)	Optional	Optional	-	-	-	-	-		-	-	-		-	-	-	-
PACK ATTACHMENT POINTS	✓	✓	✓	✓	✓	✓	-		-	-	-		✓	✓	✓	✓
CROTCH STRAPS	✓	✓	✓	✓	✓	✓	✓		-	-	-		✓	✓	✓	✓
SPRAYHOOD	✓	✓	Optional Accessory	Optional Accessory	Optional Accessory	Optional Accessory	-		-	-	-		Optional Accessory	Optional Accessory	Optional Accessory	Optional Accessory
SAFETY LINE CUTTER	Optional Accessory	Optional Accessory	Optional Accessory	Optional Accessory	Optional Accessory	Optional Accessory	-		-	-	-		-	Optional Accessory	-	Optional Accessory
PYLON™ LIFEJACKET LIGHT	✓	✓	Optional Accessory	Optional Accessory	Optional Accessory	Optional Accessory	-		-	-	-		✓	✓	Optional Accessory	Optional Accessory
LUME-ON™ LIGHTS	✓	✓	Optional Accessory	Optional Accessory	Optional Accessory	Optional Accessory	-		-	-	Optional Accessory		Optional Accessory	Optional Accessory	Optional Accessory	Optional Accessory
AIS MOB1	Optional Accessory	Optional Accessory	Optional Accessory	Optional Accessory	Optional Accessory	Optional Accessory	-		-	-	-		Optional Accessory	Optional Accessory	Optional Accessory	Optional Accessory
5 YEAR WARRANTY	✓	✓	✓	✓	✓	✓	✓		2 years	2 years	2 years		2 years	2 years	2 years	2 years
THROUGH LIFE SUPPORT	✓	✓	✓	✓	✓	✓	✓		✓	✓	✓		✓	✓	✓	✓

# DECKVEST 6D FULL SPECIFICATION AUTOMATIC INFLATING LIFEJACKET HARNESS

ISO12402-1 Deck Safety Harness

Soft loop attachment point for safety line, located on front of lifejacket for ease of access. The soft loop attachment point for safety line can be released in an emergency to free a person from their safety line

- Activation handle located behind soft loop, easy to locate, grab and pull
- Soft loop attachment released and open
- User separated from safety line and boat
- Easily reset to use again

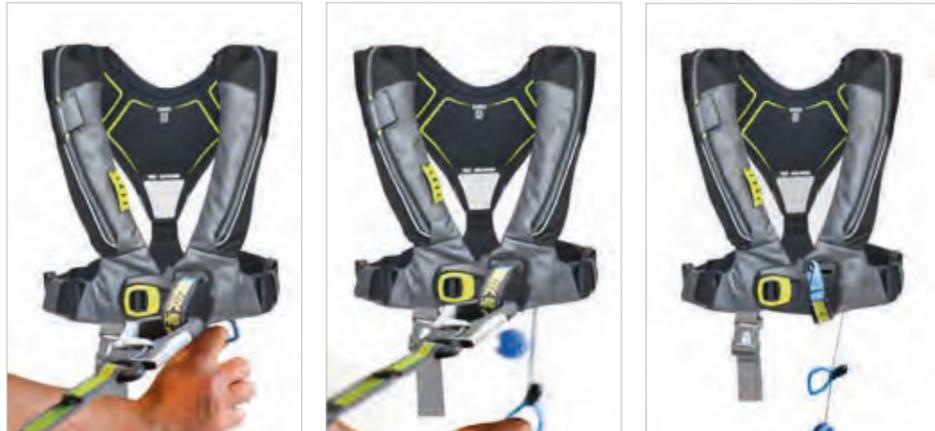

1) PULL HRS™ HANDLE TO ACTIVATE

2) HARNESS LOOP RELEASES



# DECKVEST 6D FULL SPECIFICATION AUTOMATIC INFLATING LIFEJACKET HARNESS

## FEATURES

- 170N and 275N Buoyancy
- One Size
- UML Pro Sensor Elite activation system
- Improved front opening buckle with smooth body adjuster system
- Optional Harness Release System (HRS™)
- Enhanced shoulder fit system for the perfect fit – every time – all day
- Enhanced back profile for clean, unobtrusive look and fit
- Hard wearing coated fabrics in key areas
- New sprayhood design with large visor – stored away from neck
- Firing system on rear of bladder for improved comfort and reduced snagging when inflated
- 40mm Single Leg Strap with stowage pocket - extra wide, easy to locate
- Pylon 360° lifejacket light fitted
- Lume-On bladder illumination lights fitted
- MOB1 Beacon AIS Compatible
- 5 Year Warranty



## 275N BENEFITS

170N is the recommended buoyancy for offshore sailing. Although a little bulkier and marginally heavier, a 275N lifejacket may be of benefit to certain users:

- May turn over a face-down body quicker
- May hold the user's head higher out of water
- Supports the extra weight of tools or equipment and provides extra flotation for commercial users
- Can help to turn a larger user over
- Can be of benefit to larger users

Model	Description
<b>Deckvest 6D 170N</b>	
DW-LJH6D/A	Deckvest 6D 170N (Charcoal & Black)
DW-LJH6D/ACY	Deckvest 6D 170N (Citrus & Black)
DW-LJH6D/APB	Deckvest 6D 170N (Pacific Blue & Black)
DW-LJH6D/ATW	Deckvest 6D 170N (Tropic White & Black)
DW-LJH6D/A/HRS	Deckvest 6D 170N with HRS System (Charcoal & Black)
DW-LJH6D/ACY/HRS	Deckvest 6D 170N with HRS System (Citrus & Black)
DW-LJH6D/APB/HRS	Deckvest 6D 170N with HRS System (Pacific Blue & Black)
DW-LJH6D/ATW/HRS	Deckvest 6D 170N with HRS System (Tropic White & Black)

<b>Deckvest 6D 275N</b>	
DW-LJH6D/A275	Deckvest 6D 275N (Charcoal & Black)
DW-LJH6D/A275/HRS	Deckvest 6D 275N with HRS System (Charcoal & Black)

Optional Fitting	
DW-MOB1-F	AIS MOB1 Beacon Unit
DW-HRS/6D-F	Deckvest 6D Harness Release System
DW-MAK/E -F	Manual conversion kit



UKCA and CE approved  
 ISO12402-3 150N Lifejacket  
 ISO12402-2 275N Special application lifejackets  
 ISO12401 Deck Harness

# DECKVEST 6D

## FULL SPECIFICATION AUTOMATIC INFLATING LIFEJACKET HARNESS WITH OPTIONAL HRS™



OPTIONAL  
AIS  
MOB1  
UNIT



PYLON™ LIFEJACKET  
LIGHT FITTED  
(SOLAS APPROVED)



SPRAY HOOD  
FITTED



SHOULDER FIT  
SYSTEM, SITS ON  
SHOULDERS FOR A  
COMFORTABLE FIT



COVERED  
QUICK-BURST  
ZIP



RECESSED  
MANUAL  
ACTIVATION  
HANDLE



CHEST PACK  
ATTACHMENT  
POINTS



INDICATOR  
WINDOW ON  
REAR



HIGHLY  
VISIBLE  
RED LIFTING  
STRAP



LUME-ON™  
LIFEJACKET  
ILLUMINATION  
LIGHTS FITTED



ORAL INFLATION  
TUBE &  
WHISTLE  
FITTED



BACK  
ADJUSTMENT  
POINT



PRO SENSOR  
ELITE  
FIRING  
HEAD



LIGHTWEIGHT  
SOFT LOOP  
SAFETY LINE  
ATTACHMENT POINT



ISO12402-1  
INTEGRATED  
DECK  
HARNESS



HARNESS  
RELEASE  
SYSTEM (HRS™)  
OPTIONAL





40MM  
EXTRA WIDE  
CROTCH STRAP



SMOOTH  
BODY ADJUSTER  
SYSTEM



# DECKVEST VITO OFFSHORE LIFEJACKET HARNESS WITH OPTIONAL HRS™

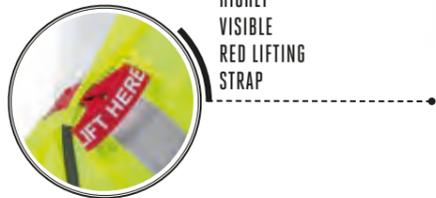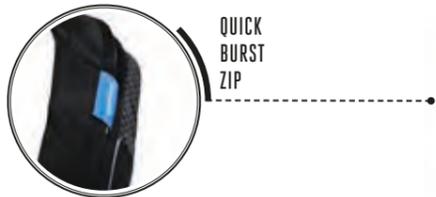

# DECKVEST VITO OFFSHORE LIFEJACKET HARNESS WITH OPTIONAL HRS™

Deckvest VITO Hydrostatic lifejacket harness is based on our custom collaboration for the VOLVO Ocean Race. Developed with input from key VOLVO crew members it became required equipment for all participants and features many new developments in both its design and function

## FEATURES

- Striking design finish in durable rip stop fabric
- 170N or 275N buoyancy
- Hammar hydrostatic automatic inflator
- Optional Harness Release System (HRS™)
- Structured fit allows easy donning with simple to adjust buckles
- Coarse and fine tune adjustment. Fit lifejacket to body size. Fine tune adjust each time for layers
- Added protection in high impact areas
- Structured sprayhood
- Pylon™ 360 lifejacket light fitted
- Lume-On™ bladder illumination lights fitted
- 40mm leg strap with stowage
- Through Life Support (TLS) Registration extends product warranty to 5 years

## HARNESS RELEASE SYSTEM (HRS) OPTIONAL

ISO 12401 Deck Safety Harness

Soft loop attachment point for safety line, located on front of lifejacket for ease of access. Soft loop attachment point for safety line can be released in an emergency to free a person from their safety line


- Activation handle located behind soft loop, easy to locate, grab and pull
- Soft loop attachment released and open
- User separated from safety line and boat



1) PULL HRS™ HANDLE TO ACTIVATE


2) HARNESS LOOP RELEASES

Model	Description
DW-VT/H170	Deckvest VITO 170N Lifejacket Harness
DW-VT/H170/HRS	Deckvest VITO 170N Lifejacket Harness with HRS
DW-VT/H275	Deckvest VITO 275N Lifejacket Harness
DW-VT/H275/HRS	Deckvest VITO 275N Lifejacket Harness with HRS
Optional Fitting	
DW-MOB/1-F	Ocean Signal MOB1 Beacon Unit Fitted
DW-PCC-F	Chest Pack Fitted
DW-HRS-F	Deckvest VITO Harness Release System Fitted

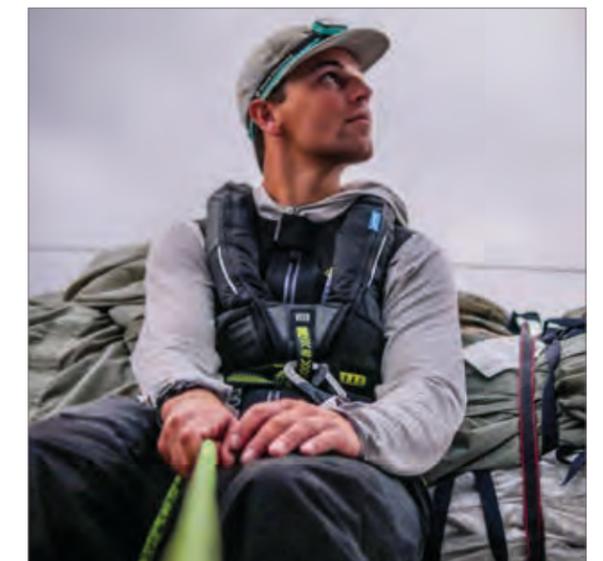

UKCA and CE approved  
 ISO12402-3 150N Lifejacket  
 ISO12402-2 275N Special application lifejackets  
 ISO12401 Deck Harness

# DECKVEST LITE & LITE+ 170N ULTRA-LIGHTWEIGHT LIFEJACKET

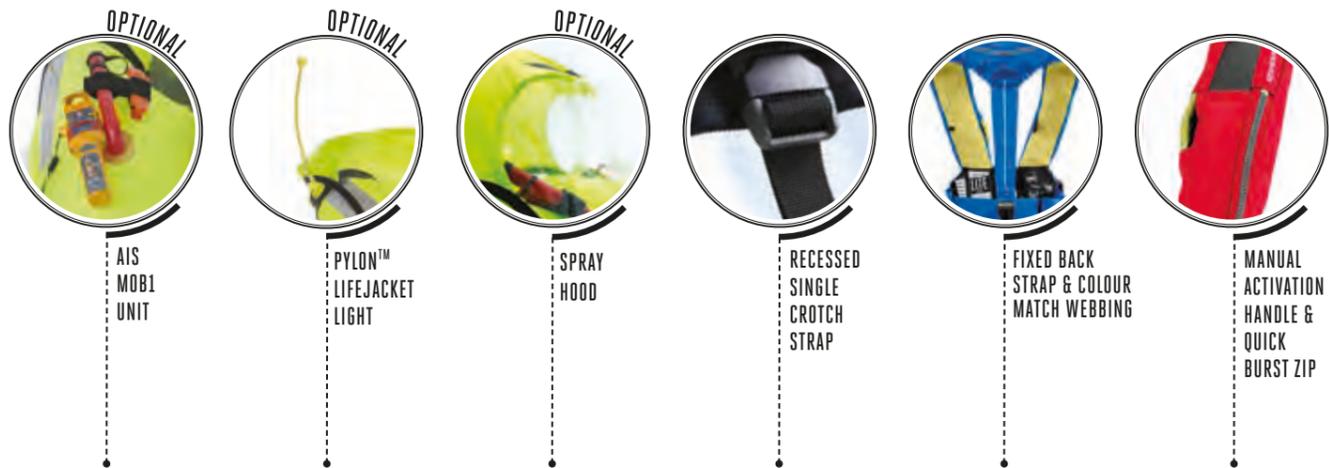

# DECKVEST LITE ULTRA-LIGHTWEIGHT LIFEJACKET

## TARGET USERS

Ideal for fastcraft, RIBs, power and sail boating, paddle sport, fishing and open powercraft

## FEATURES

- New clean, contemporary design
- Designed for the perfect fit - every time
- Lightweight low profile
- Durable honeycomb ripstop cover fabric
- 170N (38lbs) buoyancy
- UML MK5 inflator
- One size
- Single crotch strap with recessed clip reduces risk of snagging
- Muted highly reflective panel detail
- Clipping area for PLB / VHF
- Attachment point for optional Sprayhood
- Attachment point for optional Chest Pack
- Attachment point for kill cord or VHF leash
- Webbing end tidy
- Neoprene neck panel for added comfort
- Through Life Support (TLS) Registration extends product warranty to 5 years



- Black Graphite (A)
- Pacific Blue (APB)
- Flow Green (AFG)
- Bleach White (BW) **NEW**
- Seagrass Green (SG) **NEW**
- Mercury Red (MR) **NEW**



NEW BLEACH WHITE    NEW MERCURY RED    NEW SEAGRASS GREEN



BLACK GRAPHITE    PACIFIC BLUE    FLOW GREEN

## Model Description

Model	Description
DW-LTE/A	Deckvest LITE, Black
DW-LTE/APB	Deckvest LITE, Pacific Blue
DW-LTE/AFG	Deckvest LITE, Flow Green
DW-LTE/ABW	Deckvest LITE, Bleach White
DW-LTE/ASG	Deckvest LITE, Seagrass Green
DW-LTE/AMR	Deckvest LITE, Mercury Red

## Optional Fitting

DW-SHD/170-F	LITE sprayhood Fitted
DW-PYL/L1-F	Pylon™ lifejacket light Fitted
DW-LMN-F	Lume-On™ Fitted
DW-MOB/1-F	Ocean Signal MOB1 Beacon Unit Fitted
DW-MAK	UML Manual Conversion Kit available

UKCA and CE approved  
 ISO12402-3 150N Lifejacket  
 ISO 12402-6 Special application lifejackets




# DECKVEST LITE+ ULTRA-LIGHTWEIGHT LIFEJACKET WITH HARNESS

## TARGET USERS

Ideal for those wanting a lightweight lifejacket with the added security of a harness

## FEATURES

- Harness version of the popular Deckvest LITE
- Lifejacket Harness with soft loop safety line clipping point
- 170N buoyancy
- Quick and easy to use anodised buckle
- Designed for the perfect fit - every time
- UML MK5 inflater
- Lightweight low profile design
- Durable honeycomb ripstop cover fabric
- One size
- Single crotch strap with recessed clip reduces risk of snagging
- Clipping area for PLB / VHF
- Attachment point for optional Sprayhood
- Attachment points for optional Chest Pack
- Attachment point for kill cord or VHF leash
- Webbing end tidy
- Neoprene neck panel for added comfort
- Through Life Support (TLS) Registration extends product warranty to 5 years

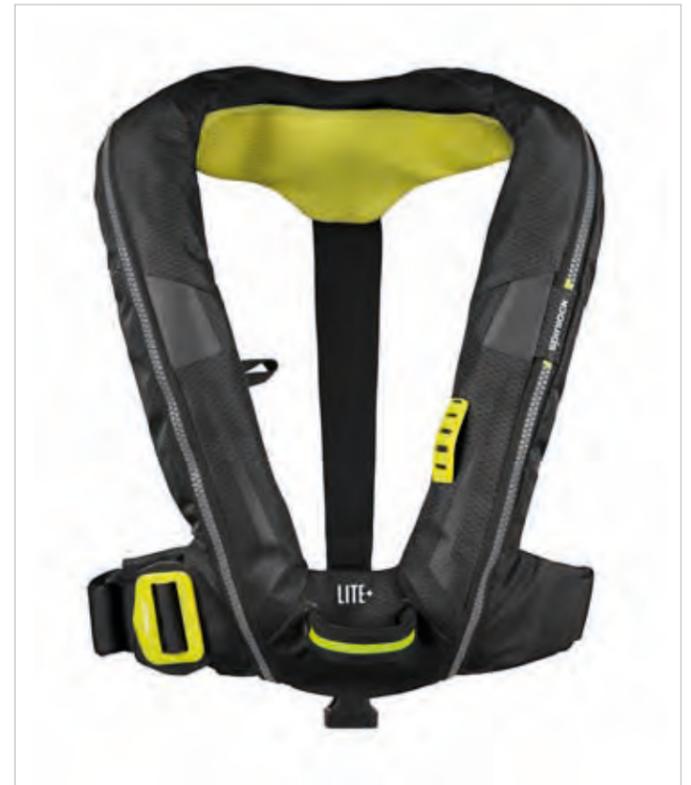

- Black Graphite (BG)
- Sun Yellow (SY) **NEW**



**NEW SUN YELLOW**

Model	Description
DW-LTH/A	Deckvest LITE+ 170N, Black
DW-LTH/ASY	Deckvest LITE+ 170N, Sun Yellow
Optional Fitting	
DW-SHD/170-F	Deckvest LITE Sprayhood Fitted
DW-PYL/L1-F	Pylon™ Lifejacket light Fitted
DW-LMN-F	Lume-On™ Bladder Illumination Lights Fitted
DW-MOB/1-F	Ocean Signal MOB1 Beacon Unit Fitted
DW-MAK-F	UML Manual Conversion Kit available Fitted

### DECKVEST LITE & LITE+ OPTIONAL FITTING

- Pylon™ Lifejacket Light
- Lume-On™ Bladder Illumination Lights
- Sprayhood
- AIS MOB1 Unit

- UKCA and CE approved
- ISO 12402-3 150N Lifejacket
- ISO12401 Deck Harness
- ISO 12402-6 - Special application lifejackets




# DECKVEST LITE USCG ULTRA-LIGHTWEIGHT 160N AUTOMATIC LIFEJACKET



A new, fully updated, refreshed design of the iconic Spinlock Deckvest LITE lifejacket. Ideal for all watersports, boaters, kayak, fishing and SUP

## FEATURES

- Clean, contemporary design
- Designed for the perfect fit - every time
- Lightweight low profile design
- Durable honeycomb ripstop cover fabric
- 160N (36lbs) buoyancy
- One size
- Webbing end tidy
- Single crotch strap with recessed clip reduces risk of snagging
- Muted highly reflective panel detail
- Clipping area for PLB / VHF
- Attachment point for optional sprayhood
- Attachment point for Chest Pack
- Attachment point for kill cord or VHF leash
- Window for checking firing head status
- Neoprene neck panel for added comfort

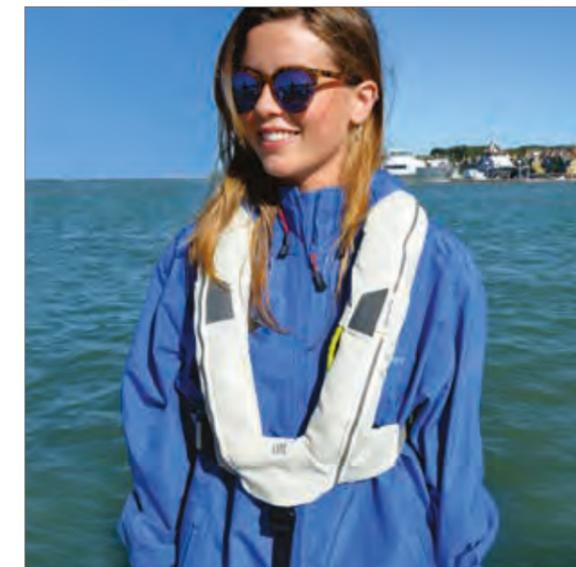

- Black Graphite (B)
- Pacific Blue (RPB)
- Bleach White (RBW)



### Part No. Description

DW-LCG/R	Deckvest LITE USCG, Black
DW-LCG/RPB	Deckvest LITE USCG, Pacific Blue
DW-LCG/RBW	Deckvest LITE USCG, Bleach White

### Approvals

UL 1180 Approved  
TYPE II USCG PFD

### Optional Fitting

DW-SHD/170-F	Sprayhood LITE Fitted
DW-PYL/L1-F	Pylon™ SOLAS approved lifejacket light Fitted
DW-LMN-F	Lume-On™ Bladder illumination lights Fitted
DW-MOB/1-F	Ocean Signal MOB1 Beacon Unit Fitted

# DECKVEST LITE & LITE+ USCG ULTRA-LIGHTWEIGHT 160N AUTOMATIC LIFEJACKET



# DECKVEST LITE+ USCG ULTRA-LIGHTWEIGHT 160N AUTOMATIC LIFEJACKET



## TARGET USERS

Ideal for those wanting a lightweight lifejacket with the added security of a harness

## FEATURES

- USCG Approved, Deck Harness version of the popular Deckvest LITE Lifejacket Harness with soft loop safety line clipping point
- 160N (36lbs) buoyancy
- Fitted with Lume-On bladder illumination lights
- Quick and easy to use anodised buckle
- Designed for the perfect fit - every time
- Lightweight low profile design
- Durable honeycomb ripstop cover fabric
- One size
- Window for checking firing head status
- Single crotch strap with recessed clip reduces risk of snagging
- Clipping area for PLB / VHF
- Attachment point for optional Sprayhood
- Attachment points for optional Chest Pack
- Attachment point for kill cord or VHF leash
- Webbing end tidy
- Through Life Support (TLS) Registration extends product warranty to 5 years



● Black Graphite (BG)



Part No.	Description
DW-LCGH/R	Deckvest LITE+ USCG Lifejacket Harness, Black
Approvals	
UL 1180 Approved TYPE II USCG PFD	
Optional Fitting	
DW-SHD/170-F	Sprayhood LITE Fitted
DW-PYL/L1-F	Pylon™ SOLAS approved lifejacket light Fitted
DW-MOB/1-F	Ocean Signal MOB1 Beacon Unit Fitted

# CELEBRATE LITTLE ADVENTURES



**NEW**

## DECKVEST NEMO+ ULTRA-LIGHTWEIGHT 160N AUTOMATIC LIFEJACKET

**NEW**

The Deckvest Nemo is an inherently buoyant 150N lifejacket with deck harness, available in two junior sizes; infant up to 15kg and child 15-30kg.

We have given a playful look to this fully featured lifejacket with deck harness, designed by Spinlock to keep our younger sailors safe and comfortable on the water.

### FEATURES

Two junior sizes: Infant >15kg and Child 15-30kg. Please note, children's lifejackets are best fitted by weight.

NEMO+ has a back harness for a safety line helping keep small hands away from the clips.

NEMO+ also has a front hand-only grab handle for adults to lift the child to safety, cleverly designed to reduce any snagging risk.

Conforms to ISO 12402-3 as a 150N Lifejacket for in water performance. Actual buoyancy : Infant 45N and Child 60N.

High-volume buoyancy with a supporting collar ensures that children will be turned over and the head supported out of the water even if they are non-swimmers.

Soft neck panels to reduce chafing.

Easy attach and adjust buckle for security.

Padded secure leg strap to hold the jacket in place.



-  Infant <15kg **NEW**
-  Child 15kg - 30kg **NEW**

Infant up to 15kg (left) and Child 15-30kg (right). The Infant and Child sizes have the colour panels reversed to help with identification.

Model	Description
DW-CNMH/1	Deckvest NEMO+ Infant
DW-CNMH/2	Deckvest NEMO+ Child


MODEL	SIZE	BUOYANCY	WEIGHT	CHEST
DW-CNMH/1	Infant	45N	<15kg	40-50cm
DW-CNMH/2	Child	60N	15kg - 30kg	45-60cm

UKCA and CE Approved	
ISO12402-3 Lifejacket	ISO12401 Deck Harness

Back harness attachment point can be used in conjunction with a safety line. Note: Front handle is a grabbing and lifting point only.

# DECKVEST NEMO+ ULTRA-LIGHTWEIGHT 160N AUTOMATIC LIFEJACKET

**NEW**



REFLECTIVE  
PANELS TO AID  
VISIBILITY



EASY ATTACH  
AND ADJUST  
BUCKLE FOR  
SECURITY



REAR  
DECK HARNESS  
FOR SAFETY LINE:  
CLIP OR COW-HITCH



REAR  
DECK HARNESS  
FOR SAFETY LINE:  
CLIP OR COW-HITCH



FRONT HAND-ONLY  
GRAB HANDLE FOR  
ADULTS TO LIFT THE  
CHILD TO SAFETY



WEBBING  
BELT END  
TIDY



COLOUR PANELS REVERSED  
TO HELP WITH IDENTIFICATION



CHILD 15-30KG



INFANT UP TO 15KG



PROTECTIVE COLLAR  
WILL KEEP HEAD  
SUPPORTED IN THE  
WATER



PADDED, SECURE LEG  
STRAP TO HOLD  
LIFEJACKET IN PLACE  
IN THE WATER



INTEGRATED  
DECK HARNESS  
ISO12401 APPROVED




LIFEJACKET  
ISO12402-3  
APPROVED




SOFT  
NEOPRENE  
NECK PANEL



WHISTLE  
TO ALERT  
ATTENTION

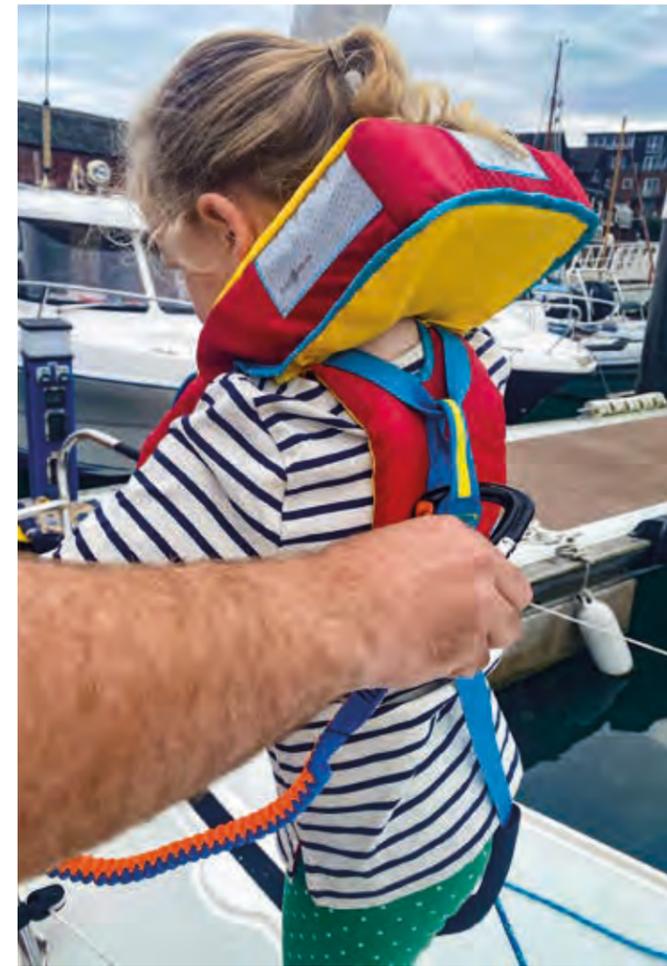

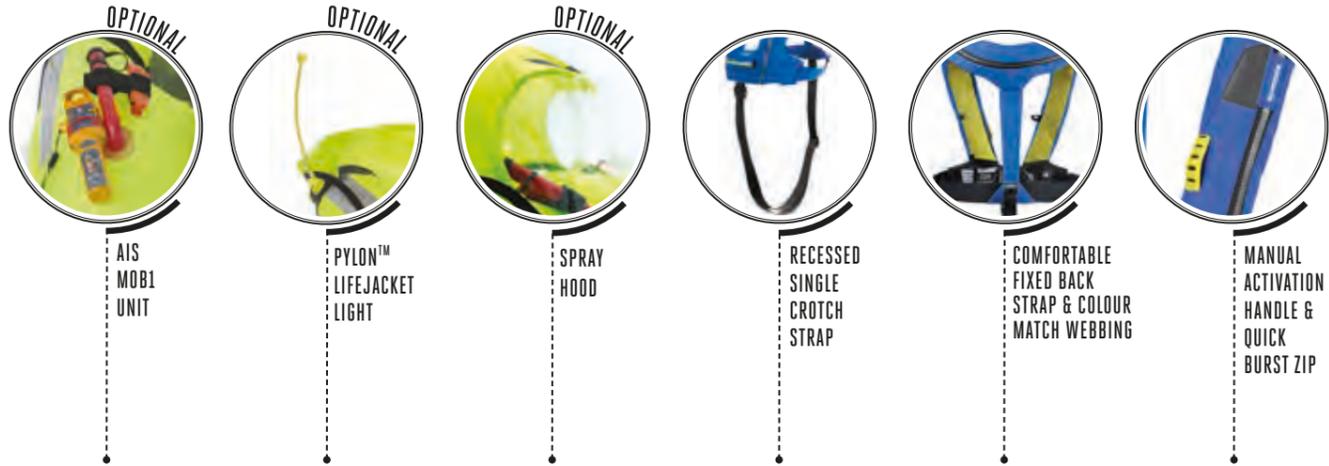

TARGET USERS

For junior sailors aged approximately 7 to 15 years old, weighing 20-50kgs

FEATURES

- Junior 150N Category Lifejacket Harness (100N actual buoyancy)
- Weight range 20-50kgs
- Compact and lightweight with form-fitting shape
- Neoprene neck panel for added comfort
- Soft loop harness attachment point
- Lightweight easy adjust belt
- Single Crotch Strap
- Automatic inflation – UML Mk 5
- Attachment for optional Pylon™ Light
- Attachment for optional Sprayhood
- Through Life Support (TLS) Registration extends product warranty to 5 years



- Pacific Blue (PB)
- Sun Yellow (SY) **NEW**




NEW SUN YELLOW

Model	Description
DW-CEN/APB	Deckvest Cento, Pacific Blue
DW-CEN/ASY	Deckvest Cento, Sun Yellow
Optional Fitting	
DW-SHD/100-F	Cento Sprayhood Fitted
DW-PYL/L1-F	Pylon™ lifejacket light Fitted
DW-LMN-F	Lume-On™ Bladder Illumination Lights Fitted
DW-MOB/1-F	Ocean Signal MOB1 Beacon Unit Fitted
DW-MAK-F	UML Manual Conversion Kit available

- OPTIONAL FITTING**
- Pylon™ Lifejacket Light
  - Lume-On™ Bladder Illumination Lights
  - Sprayhood
  - AIS MOB1 Beacon Unit

UKCA and CE approved  
 ISO12402-3 150N Lifejacket  
 ISO12401 Harness  
 ISO 12402-6 - Special application lifejackets

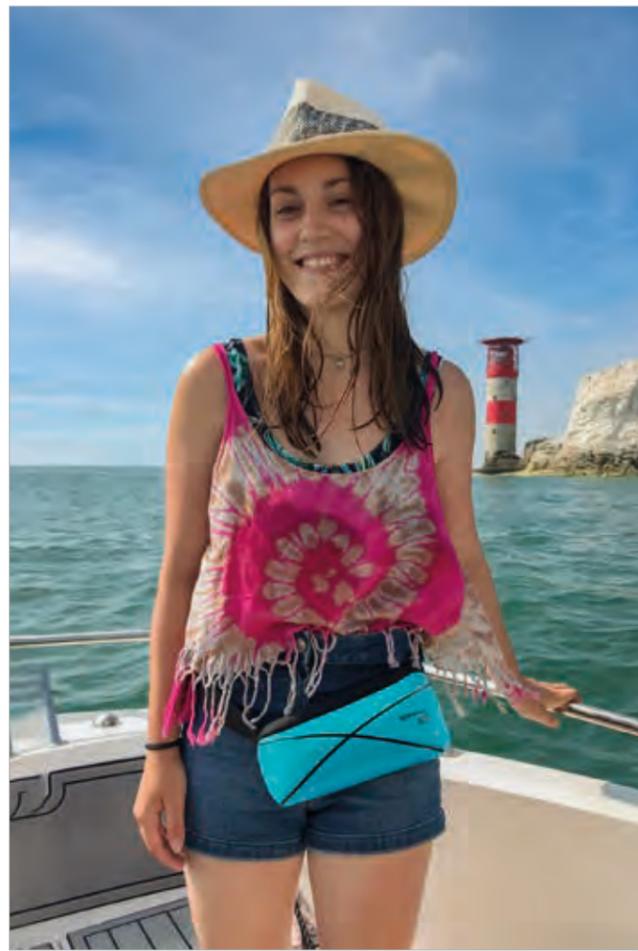

# ALTO BELT PACK 75N WAIST-WORN FLOTATION AID

NEW USCG

VERSION AVAILABLE



Designed for a range of watersports, the ALTO is a lightweight, compact, inflatable flotation device worn around the waist. Simple, discrete easy to use emergency inflation. Manually operated, the inflatable tube is released from the waist pack and then supports the user under the arms and around the chest. ALTO offers users such as SUP, fishermen and boaters, a simple and easy to use inflatable pack that feels invisible when worn.

## FEATURES

- Large 75N of emergency buoyancy
- Compact and lightweight adjustable waist belt for a simple, close fit
- Can be worn on front or back
- Manually activated

## NEW USCG VERSION

Model	Description
DW-ATU/M75	ALTO USCG 75N Flotation Aid (Black)
DW-AT/M75/AB	ALTO USCG 75N Flotation Aid (Atoll Blue)
DW-AT/M75/FO	ALTO USCG 75N Flotation Aid (Fluro Orange)
DW-AT/M75/CY	ALTO USCG 75N Flotation Aid (Citrus Yellow)
DW-AT/M75/MR	ALTO USCG 75N Flotation Aid (Mercury Red)

Model	Description
DW-AT/M75	ALTO 75N Flotation Aid (Black)
DW-AT/M75/AB	ALTO 75N Flotation Aid (Atoll Blue)
DW-AT/M75/FO	ALTO 75N Flotation Aid (Fluro Orange)
DW-AT/M75/CY	ALTO 75N Flotation Aid (Citrus Yellow)
DW-AT/M75/MR	ALTO 75N Flotation Aid (Mercury Red)

DW-RAK/75 ALTO rearming kit (2 x 16g CO2 & 2 x manual clips)

Optional Fitting	Description
DW-LMN-F	Lume-On™ Bladder Illumination Lights Fitted

UKCA and CE approved  
 ISO12402-5 50N Buoyancy Aid  
 ISO12402-6 Special application lifejackets



PULL



INFLATE



FLOAT

### FEATURES

Storage pouch for the ALTO with multiple attachment options – allowing ALTO to be accessible as needed if not being worn

Multiple adjustable fitting options allows the pocket to be mounted in various accessible locations

ALTO can be thrown to casualties in the water if needed

Easy open lid – allows quick access to the ALTO when needed

Heavy duty materials protect the Alto from the environment

High Visibility colours for easy location



Model	Description
DW-TAH/FO	ALTO Holder, Orange



### TARGET USER

Designed for us with Spinlock flotation product or independently

### FEATURES

3 Sizes - Small, Medium, Large

Fully Waterproof - IPX7 Rated

Waterproof press closure

Opening belt loop attachment

Internal security loop

External tether point

Medium and Large packs include a window

Large pack - single pocket wraps over belt to form smaller pack

Universal back loop allows attachment to hard or soft mounts



Small and Medium packs



Large pack

<span style="color: yellow;">●</span>	Yellow Lime (YL)
<span style="color: blue;">●</span>	Blue Azure (B)

Model	Description
DW-PW/1YL	Pack size 1 small, Yellow Lime
DW-PW/1BA	Pack size 1 small, Blue Azure
DW-PW/2YL	Pack size 2 medium, Yellow Lime
DW-PW/2BA	Pack size 2 medium, Blue Azure
DW-PW/3YL	Pack size 3 large, Yellow Lime
DW-PW/3BA	Pack size 3 large, Blue Azure



# ALTO BELT PACK 75N WAIST-WORN FLOTATION AID



75N EMERGENCY INFLATABLE BUOYANCY



SLIM AND LIGHTWEIGHT DESIGN



ONE SIZE 60-145CM (27-57 INCH) WAIST



INFLATES ONLY WHEN YOU NEED IT TO, MANUALLY BY PULLING THE TOGGLE



INFLATES INTO A HORSE SHOE SHAPE



SUPPORTS THE USER AROUND THE CHEST WHEN INFLATED



ACCESSORIES

ALTO THROW PACK & STORAGE POUCH FOR MOUNTING ON-DECK



ACCESSORIES

INTEGRATES WITH FULLY WATERPROOF IPX7 RATED SPINLOCK WATERPROOF PACK RANGE



ACCESSORIES

RE-ARMING KIT INCLUDES 2 x CO2 & 2 x CLIPS (DW-RAK75)



ACCESSORIES

INTEGRATES WITH LUME-ON™ LIFEJACKET ILLUMINATION LIGHTS



HALKEY ROBERTS OPERATING SYSTEM WITH 16g CO2 BOTTLE & MANUAL CLIP



SIT BACK & FLOAT OR TURN & SWIM TO SAFETY



ISO12402-5 50N BUOYANCY AID

ISO12402-6 SPECIAL PURPOSE BUOYANCY AID

USCG VERSION AVAILABLE!



WORN AROUND THE WAIST, FRONT OR BACK



VIVID COLOUR RANGE

## WATERPROOF PACK RANGE FOR ALL YOUR ESSENTIALS



## ESSENTIALS PACK RANGE FOR ALL YOUR ESSENTIALS

### CHEST PACK



Smallest pack - suitable for personal essentials  
 Lightly padded with structured two way zip for easy access  
 Lanyard attachment and key clip for security  
 'Toggle Fits' all Deckvest Models in chest position, left hand side  
 Fits to any belt with secure double fold hook and loop attachment  
 Self-draining

DW-PCC

### BELT PACK



Mid size pack - suitable for daily essentials  
 Lightly padded with structured two way zip for easy access  
 Lanyard attachment and key clip for security  
 Clear panel window  
 Fits to any belt with secure double fold hook and loop attachment  
 Self-draining

DW-PCB

### SIDE PACK



Mid size pack - suitable for daily essentials  
 Secure water bottle holder - includes 380ml bottle  
 Lightly padded with structured two way zip for easy access  
 Lanyard attachment and key clip for security  
 Fits to any belt with secure double fold hook and loop attachment  
 Self-draining

DW-PCS

### TOOL PACK



Heavy duty soft tool bucket for carrying large items aloft  
 Big enough for power tools, hammers and range of hand tools  
 Hard wearing PU coated fabric  
 3 large pockets  
 Internal pocket for small items  
 Lash points for tool security

DW-PCT

### DECKPACK



Lightweight 27 litres backpack for stashing the day's essentials: quick access pocket, bottle pocket, laptop sleeve, name patch  
 Printed version available for promotional use, including logos of Volvo Ocean Race, Land Rover BAR and Queen's Award  
 DW-DBG/P 27L Deck Pack with partner printing (promotional)

DW-DBG

# AERO PRO DYNAMIC BODY PROFILED 50N FLOTATION VEST

## TARGET USERS

For high agility dinghy, multihull and keelboat sailing

## FEATURES

- 50N Flotation vest for high agility sailing
- Durable high stretch woven construction for close fitting body
- Wrap around, close fitting neck collar
- Over length waist gaiter with trapeze hook opening
- Short sleeves
- Ultra flexible, high buoyancy soft foam
- High gloss cover finish to reduce wind and water resistance
- Airwave Technology for improved airflow
- Low profile stretch pocket
- Available in 3 sizes
- Access pocket for optional:
  - D3O® Impact Protection, Back Protector



### D3O® IMPACT PROTECTION BACK PROTECTOR

- D3O® patented technology
- Certified to exceed the performance requirements of EN1621-2:2014
- Ergonomic design for comfort and protection

Please note: No personal protection equipment can offer complete protection against all injuries. The user hereby agrees to absolve the manufacturer of all liability in respect of any personal injury

CE Approved 50N Buoyancy ISO12402-5

Model	Description
DW-BAR/1	Aero Pro, size 1
DW-BAR/2	Aero Pro, size 2
DW-BAR/3	Aero Pro, size 3
DW-BBP	Aero Pro, Back protector, Small
DW-BBP/L	Aero Pro, Back protector, Medium Large

# WING & FOIL 50N HIGH AGILITY FLOTATION PFD

## TARGET USERS

Ideal for dinghies, keelboats, RIBs and watersports

## FEATURES

- 50N buoyancy
- Low profile with low snag body fit system
- Tapered high cut for action and mobility
- Front and side zip versions
- Articulated back panelling (FOIL)
- Dry coated elastic side panels to reduce water absorption
- Available in sizes S, M, L & XL
- WING available in XS



- Black Graphite (BG)
- Cobalt Blue (CB)
- Mercury Red (MR)



UKCA and CE approved  
ISO12402-5 50N buoyancy Aid

COLOUR	BLACK GRAPHITE ●	COBALT BLUE ●	MERCURY RED ●
MODEL	WING PFD SIDE ZIP	FOIL PFD FRONT ZIP	WING PFD SIDE ZIP
SIZE			
XS	DW-BA/SBG	-	DW-BA/SCB
S	DW-BA/S1BG	DW-BA/F1BG	DW-BA/S1CB
M	DW-BA/S2BG	DW-BA/F2BG	DW-BA/S2CB
L	DW-BA/S3BG	DW-BA/F3BG	DW-BA/S3CB
XL	DW-BA/S4BG	DW-BA/F4BG	DW-BA/S4CB

# AIS MOB1 BEACON INTEGRATED AIS MOB

## FEATURES

- Designed to be fully integrated into the lifejacket system
- The most compact AIS Unit on the market – up to 30% smaller
- Slim, lightweight & streamlined
- AIS unit deploys automatically on lifejacket inflation
- Integrated strobe light for maximum visibility
- 7 year battery life
- 24+ hour operational life
- 5 year warranty
- Supplied integrated and installed ready to use
- Once activated your MOB1 will transmit an alert to all AIS receivers and AIS enabled plotters in the vicinity. The integrated GPS ensures precise location is sent to your vessel and any others that may be assisting
- An additional feature of the MOB1 is its ability to activate the DSC alarm on your vessel's VHF
- Full details of MOB1 available at [www.oceansignal.com](http://www.oceansignal.com)



Model	Description
DW-MOB1	Ocean Signal AIS MOB1 Beacon unit

# LUME-ON™ LIFEJACKET BLADDER ILLUMINATION

## FEATURES

- 2 flashing LED Lights (pair) illuminate the inflated lifejacket bladder to increase visibility and aid location
- Water activated - waterproof (IP68)
- Uses the inflated lifejacket bladder as diffuser to increase visibility
- Compact design
- Attaches and integrates only in lifejackets with separate bladder and cover construction. Sticks directly to underside of inflatable chamber
- Retail packaged as a pair of self adhesive lights
- Standard feature on Deckvest 6D and Vito
- Multiple award winning product, including DAME design award 2015



Model	Description
DW-LMN	Lume-On™ - Lifejacket Bladder Illumination x 2

# OCEAN SIGNAL PLB3 PERSONAL LOCATOR BEACON WITH AIS, RLS & NFC MOBILE CONNECTIVITY

The new Ocean Signal PLB device is approved for use in the Spinlock lifejackets: Deckvest 6D, Deckvest VITO.

## FEATURES


- Automatic Identification System (AIS) functionality, Return Link Service (RLS) technology, and Near Field Communication (NFC) capabilities in one 406 MHz Personal Locator Beacon (PLB)
- Transmit your distress signal to COSPAS-SARSAT and nearby vessels, ensuring a swift and accurate rescue.
- Spinlock Compatibility: Integrate the PLB3 with Spinlock's Deckvest 6D, DURO SOLAS and DURO SOLAS+.
- 5-year battery life and 24 hours operational life



# PYLON™ LIFEJACKET LIGHT FOR COMPLETE ALL-ROUND VISIBILITY

## FEATURES

- High visibility LED light
- Compact, easily attachable lifejacket light
- Raised 23cm antenna light significantly improves 360° visibility
- Retrofits to other inflatable lifejackets with included hook and loop strap
- Water activated with on/off switch
- 5 year shelf life

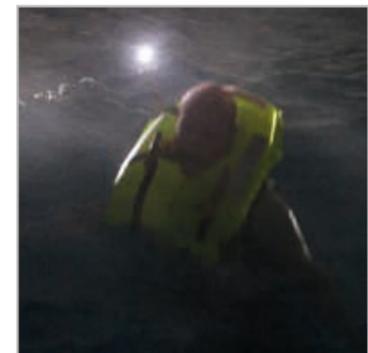

Approvals
Latest SOLAS MED and USCG Approvals
Marine Equipment Directive
UK Merchant Shipping (Marine Equipment) Regulations 2016

Model	Description
DW-PY/L1	1 Single retail unit

# PERFORMANCE KNEEPADS LOW PROFILE IMPACT PROTECTION

## FEATURES

- Slim and low profile design for ultimate long term comfort
- High flex panelling – moves with the leg and knee to ensure the knee pad stays in place
- High stretch, soft touch moulded foam provides patella support and protection
- Extra tough 'Tatex' construction moulded outer fabric protection
- Low volume back panelling prevents bulking
- Available in 3 sizes: S, M and L
- Extra grip - Sticky rubber compound increases grip in all conditions



Model	Description
DW-KPD/1	Kneepads - Small (pair)
DW-KPD/2	Kneepads - Medium (pair)
DW-KPD/3	Kneepads - Large (pair)



# NEW PERFORMANCE SAFETY LINES

## ULTRA-LIGHTWEIGHT SAFETY LINES

NEW

## FEATURES

- Lighter and more compact than conventional safety lines
- Easy to use lightweight clip with wide opening gate
- Webbing 'Dry Coated' to reduce water absorption and stay lighter for longer
- Overload Indicator
- DW-STR/03/C and DW-STR/3L are both compliant with section 5.02.2 of the Offshore Special Regulations: ALL crew members to have a tether with 3 points of attachment, for category 0,1,2 & 3 races
- World Sailing / ORC compliant
- WARNING: THE SAFETY LINE HOOK MUST BE FREE TO ROTATE TO ALIGN WITH THE LOAD. LATERAL LOADING OF THE HOOK MUST BE AVOIDED
- For users at least 16 years of age and 50kg+

UKCA and CE Approved ISO12401  
UIAA 121 Approved



**DW-STR/1L/C**  
1 CLIP & 1 LINK SAFETY LINE  
(1 METER LENGTH)



**DW-STR/2LE/C**  
1 CLIP & 1 LINK ELASTICATED  
PERFORMANCE SAFETY LINE



**DW-STR/02E/C**  
2 CLIP ELASTICATED  
PERFORMANCE SAFETY LINE



**DW-STR/3L/C**  
2 CLIP & 1 LINK ELASTICATED  
PERFORMANCE SAFETY LINE



**DW-STR/03/C**  
3 CLIP ELASTICATED  
PERFORMANCE SAFETY LINE



# DECK PRO REVOLUTIONARY DECK SAFETY HARNESS

## TARGET USERS

Ideal for sailors who prefer to be 'clipped on' when sailing

## FEATURES

Ultra lightweight and comfortable design

Easy to fit with quick adjust 'double back' twin buckles in marine grade stainless steel

Soft loop tether attachment in high tensile webbing

Shoulder straps shaped towards the centre of the chest, for exceptional comfort and freedom of movement

'S' Cutter accessory pocket

Chest size adjustment 72-128cm (29-49")

UKCA and CE approved ISO 12401



Model	Description
DW-DPH	Deck Pro



# MAST PRO MAST CLIMBING HARNESS



# MAST PRO NEXT GENERATION MAST HARNESS

## TARGET USERS

All working at height on board a yacht or powerboat

## FEATURES

- Re-engineered for improved comfort
- Extremely lightweight minimal design
- Super slim, structured waist belt spreads the load evenly over its full width, for comfort with reduced bulk
- Unique Ratchet-Fit™ adjustment on leg straps for a secure, easy fit
- Ergonomic sculptured waist belt and super wide leg straps for added comfort and lumbar support
- Designed for use in the marine environment
- Marine grade stainless steel 'double-back' buckles
- Tripping spike pocket - accessible from both sides
- User replaceable leg strap elastics
- Tool attachment points
- Spinlock FID tripping spike available
- Compatible with Tool Pack



Ratchet Fit™ leg adjustment

● Cobalt Blue

UKCA and CE approved  
0120 Type C - EN12277

Model	Description
DW-MPH	Mast Pro Harness





**COMMERCIAL**  
INSPIRING CONFIDENCE

## PRO-TECH HEAVY DUTY PROTECTIVE COVER

Heavy duty coated polyester cover for Spinlock Lifejackets. For use in dirty work operations like painting / jet washing: provides a resistant barrier where contaminants such as paint, oils and chemicals can quickly damage a lifejacket.

### TARGET USERS

Commercial marine users who need to prolong the life of a lifejacket

### FEATURES

Heavy duty coated polyester cover for Spinlock Lifejackets

Provides some protection against sharps which can compromise lifejacket bladders

Designed to integrate with the Deckvest SOLAS and Deckvest DURO lifejackets

Offers a low cost solution to prolong lifejacket life



Model	Description
DW-TEC	Pro-Tech Heavy Duty Protective Cover



## DURO SOLAS SOLAS APPROVED 275N TWIN CHAMBER LIFEJACKET

Our popular DURO SOLAS 275N lifejacket has been engineered for demanding use and conditions with a new heavy-duty, durable outer cover. An improved buckle system ensures easy donning, ultimate comfort and fit.

### FEATURES

Includes heavy duty outer cover

Approval to latest 2010 SOLAS standard

275N (62 lbs) Buoyancy twin chamber lifejacket

Structured shape and body for ultimate comfort and agility

Single Belt adjustment with single crotch strap

Compatible with most fall-arrest harness models

Twin automatic inflation: UML Mk5, 2 x 60g CO2 cylinders

Unique bladder shape lifts and supports body higher when in water

Pylon™ SOLAS Approved life jacket light included

Designed to be worn for extended periods of time in conjunction with other kit

Heavy duty zip closure with protective covers

Floating 'Buddy Line'

Logo printing available

Window pocket for ID/asset tracking



#### OPTIONAL FITTING


- Lume-On™ Bladder Illumination Lights
- Sprayhood
- AIS MOB1 Beacon Unit
- Pro-Tech Protective Cover
- Chest Pack

Model	Description
DW-SLS/A	DURO SOLAS Twin Chamber 275N lifejacket
Optional Fitting	
DW-SHD/SLS-F	SOLAS 275N Sprayhood Fitted
DW-LMN-F	Lume-On™ Bladder Illumination Lights Fitted
DW-MOB/1-F	Ocean Signal MOB1 Beacon Unit Fitted

UKCA  
 CE Approved  
 ISO12402-2 275N Lifejacket  
 ISO 12402-6 Special application lifejackets  
 2010 SOLAS MSC200 (80)  
 UK Merchant Shipping (Marine Equipment Regulations 2016)

# DURO SOLAS & DURO SOLAS+

## SOLAS APPROVED 275N TWIN CHAMBER LIFEJACKET



### NEW SOLAS+ WITH DECK HARNESS





## DURO SOLAS+

## SOLAS APPROVED 275N TWIN CHAMBER LIFEJACKET WITH DECK HARNESS

NEW

Our popular DURO SOLAS 275N lifejacket has been engineered for demanding use and conditions with a heavy-duty, durable outer cover the new DURO SOLAS+ features a full approved deck harness with rear attachment option. An improved buckle system ensures easy donning, ultimate comfort and fit.

### FEATURES

- Now includes heavy duty outer cover
- Approval to latest 2010 SOLAS standard
- 275N (62 lbs) Buoyancy twin chamber lifejacket
- Integrated Deck Harness
- Structured shape and body for ultimate comfort and agility
- Single Belt adjustment with single crotch strap
- Compatible with most fall-arrest harness models
- Soft loop deck harness for Safety Line attachment
- Optional Rear Harness attachment point
- Twin automatic inflation: UML Mk5, 2 x 60g CO2 cylinders
- Unique bladder shape lifts and supports body higher when in water
- Pylon™ SOLAS approved life jacket light included
- Designed to be worn for extended periods of time in conjunction with other kit
- Heavy duty zip closure with protective covers
- Floating 'Buddy Line'
- Logo printing available
- Window pocket for ID/asset tracking



#### OPTIONAL FITTING

- Lume-On™ Bladder Illumination Lights
- Sprayhood
- AIS MOB1 Unit
- Pro-Tech Protective Cover
- Chest Pack
- Rear Harness Attachment point

Model	Description
DW-SLH/A	DURO SOLAS Twin Chamber 275N lifejacket
Optional Fitting	
DW-SHD/SLS-F	SOLAS 275N Sprayhood Fitted
DW-LMN-F	Lume-On™ Bladder Illumination Lights Fitted
DW-MOB/1-F	Ocean Signal MOB1 Beacon Unit Fitted
DW-RHA/F	Rear harness attachment point fitted

- UKCA
- CE Approved
- ISO 12402-2
- ISO 12402-6 Special application lifejackets
- ISO 12401 Deck Harness (front and rear option)
- 2010 SOLAS MSC200 (80)
- UK Merchant Shipping (Marine Equipment Regulations 2016)



# DURO COMPACT, FRONT OPENING 170N & 275N LIFEJACKET

NEW

## TARGET USERS

Suitable option for all industrial users including SAR, Fishing, Construction, Canal and Barge, Tug and Work Boat

## FEATURES

- Designed to withstand the demands of tough environments
- 170N and 275N Versions (38lbs and 62lbs) buoyancy
- Extra durable cover materials for a long life
- Lightweight, low profile, compact design with easy side donning
- One size
- Straps with soft rear moulding reduces twisting and aids adjustment
- Double crotch strap with recessed clip reduces risk of snagging
- Clipping area for PLB / VHF
- Clear pocket for identification card
- Branded printing available
- Attachment point for optional sprayhood (see page 90-91)
- Attachment point for optional Chest Pack (see page 86)
- Attachment for kill cord or VHF leash
- Automatic inflation – UML Mk 5



- Black
- Fluro Orange (FO) 275N only

## INFLATION SYSTEM

UML Mk5 or Pro Sensor Elite - Water sensitive activation system which uses a compressed paper capsule



## CUSTOMISABLE SPECIFICATION




Model	Description
DW-LTDFC/A170	Deckvest DURO Front Closing 170N (MK5) Black
DW-LTDFC/A275	Deckvest DURO Front Closing 275N (MK5) Black
DW-LTDFC/A275FO	Deckvest DURO 275N Front Closing (MK5) Fluro Orange
DW-MOB/1-F	Ocean Signal MOB1 Unit Fitted
DW-PY/L1-F	Pylon Lifejacket Light Fitted
DW-LMN-F	Lume-On™ Lifejacket Bladder Illumination x 2 Fitted
DW-SHD/170-F	Deckvest DURO Sprayhood Fitted, 170N
DW-SHD/275-F	Deckvest DURO Sprayhood Fitted, 275N
DW-TEC-F	Pro-Tech Protective Cover Fitted
DW-MAK	UML Manual Conversion Kit available

### OPTIONAL FITTING

- Lume-On™ Bladder Illumination Lights
- Sprayhood
- AIS MOB1 Unit
- Pro-Tech Protective Cover
- Pylon TM SOLAS approved life jacket light

### UKCA

- CE Approved
- ISO12402-3 170N Special application lifejackets
- ISO12402-2 275N Special application lifejackets

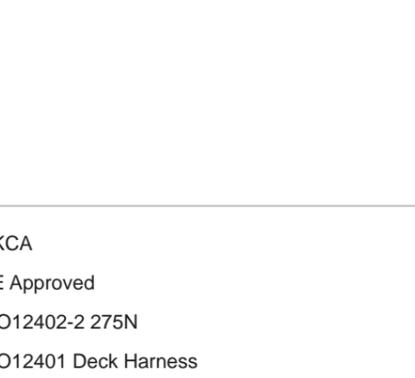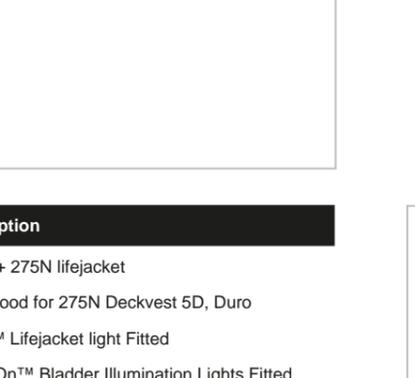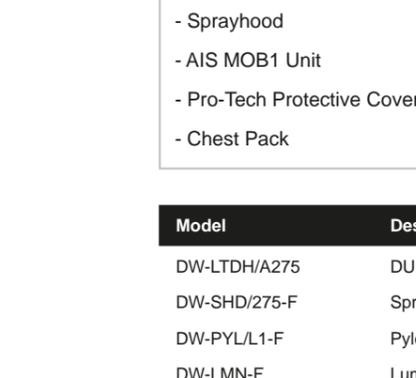

Based on our Deckvest 6D, the new DURO+ offers commercial marine users the ultimate in comfort and fit with the option of the innovative Harness Release System

**FEATURES**

- Designed to withstand the demands of tough environments
- 275N (62lbs) buoyancy
- Extra durable cover materials for a long life
- Low profile, compact design
- Chest and back adjustment for easy fit every time
- One size
- Single crotch strap with recessed clip reduces risk of snagging
- Cover window for CO2 Cylinder & Firing Head visual status
- ID and Asset Track Pocket
- Now available with optional Harness Release System (HRS)

**INFLATION SYSTEMS**

UML Pro Sensor Elite: Water sensitive activation system which uses a compressed paper capsule



- OPTIONAL FITTING**
- Pylon™ SOLAS Lifejacket Light
  - Lume-On™ Bladder Illumination Lights
  - Sprayhood
  - AIS MOB1 Unit
  - Pro-Tech Protective Cover
  - Chest Pack

Model	Description
DW-LTDH/A275	DURO+ 275N lifejacket
DW-SHD/275-F	Sprayhood for 275N Deckvest 5D, Duro
DW-PYL/L1-F	Pylon™ Lifejacket light Fitted
DW-LMN-F	Lume-On™ Bladder Illumination Lights Fitted
DW-MOB/1-F	Ocean Signal MOB1 Unit Fitted
DW-MAK/E	Manual Conversion Kit available

UKCA  
 CE Approved  
 ISO12402-2 275N  
 ISO12401 Deck Harness

PRODUCT	CODE	DESCRIPTION	INCLUDES
ALTO	DW-RAK/75	RE-ARMING KIT ALTO 75N	2 x 16g cylinders and 2 x clips
CENTO	DW-RAK/100	RE-ARMING KIT DECKVEST CENTO 100N	UML Firing head and 20g cylinder for Deckvest CENTO
LITE, LITE+, DURO 170N, Deckvest 5D (Pre-October 2018)	DW-RAK	RE-ARMING KIT PRO SENSOR 170N	UML Mk5i Firing head and 33g cylinder
DURO 275N, DURO+, DURO SOLAS, DURO SOLAS+	DW-RAK/275	RE-ARMING KIT PRO SENSOR 275N	UML Mk5i Firing head and 60g cylinder. Please note for Deckvest SOLAS and SOLAS+: 2 x 60g cylinders may be required
Deckvest 5D 170N (2018 onwards) Deckvest 6D 170N	DW-RAK/E170	RE-ARMING KIT PRO SENSOR ELITE 170N	UML Elite Firing head and 33g cylinder
Deckvest 5D 275N (2018 onwards) Deckvest 6D 275N	DW-RAK/E275	RE-ARMING KIT PRO SENSOR ELITE 275N	UML Elite Firing head and 60g cylinder
USCG Deckvest LITE	DW-RAR/33G	RE-ARMING KIT HALKEY ROBERTS 170N	Halkey Roberts Bobbin and 33g Cylinder
Deckvest VITO 170N	DW-RAH/V170	RE-ARMING KIT VITO HAMMAR 170N	33g Cylinder with backing plate, HAMMAR activation head, Manual handle for VITO 170N (140mm) and rearming key CO2 cylinder, activation head and manual handle for Hammar® Hydrostatic
Deckvest VITO 275N	DW-RAH/V275	RE-ARMING KIT VITO HAMMAR 275N	60g Cylinder with backing plate, HAMMAR activation head, Manual handle for VITO 275N (250mm) and rearming key
Deckvest 5D HAMMAR (Pre-2018)	DW-RAH/150	RE-ARMING KIT HAMMAR 170N	33g Cylinder with backing plate, HAMMAR activation head, Manual handle for Deckvest 170N (230mm) and rearming key
Deckvest 5D HAMMAR (Pre-2018)	DW-RAH/275	RE-ARMING KIT HAMMAR 275N	60g Cylinder with backing plate, HAMMAR activation head, Manual handle for Deckvest 275N (300mm) and rearming key
Deckvest 6D	DW-UMLE	FIRING HEAD PRO SENSOR ELITE FROM 2018 ONWARDS	UML Pro Sensor ELITE firing head only
Deckvest LITE, LITE+, CENTO	DW-UML5	FIRING HEAD PRO SENSOR & MK5	UML Mk5i Firing head only
Deskvest CENTO	DW-CYD20	CO2 CYLINDER ONLY 20G	20g cylinder only
Deckvest 5D, 6D, LITE, LITE+, DURO, VITO	DW-CYD33	CO2 CYLINDER ONLY 33G	33g cylinder for 170N lifejackets
Deckvest 5D, 6D, VITO, LITE+ DURO, DURO+, DURO SOLAS, DURO SOLAS+	DW-CYD60	CO2 CYLINDER ONLY 60G	60g cylinder for 275N lifejackets
Deckvest 5D (pre-2018) LITE, LITE+	DW-MAK	MANUAL CONVERSION KIT	Contains a blanking cap and manual tag for converting inflation systems to manual from automatic
Deckvest 5D, 6D (post-2018)	DW-MAK/E	MANUAL CONVERSION KIT PRO SENSOR ELITE	Contains a blanking cap and manual tag for converting UML Elite inflation systems to manual from automatic
Dekvest CENTO	DW-SHD/100	SPRAYHOOD DECKVEST CENTO	Sprayhood for CENTO
170N 5D, LITE, LITE+, DURO 170N	DW-SHD/170	SPRAYHOOD 170N	Sprayhood for 170N 5D, LITE, LITE+, DURO

PRODUCT	CODE	DESCRIPTION	INCLUDES
5D 275N, 6D 275N, DURO 275N, DURO+	DW-SHD/275	SPRAYHOOD 275N	Sprayhood for 275N 6D, 5D, DURO, DURO+
Deckvest 6D 170N	DW-SHD/170/6D	SPRAYHOOD DECKVEST 6D 170N	Sprayhood for Deckvest 6D 170N
Deckvest VITO 170N	DW-SHD/170/VT	SPRAYHOOD DECKVEST VITO 170N	Sprayhood for Deckvest VITO 170N
Deckvest VITO 275N	DW-SHD/275/VT	SPRAYHOOD DECKVEST VITO 275N	Sprayhood for Deckvest VITO 275N
DURO SOLAS, DURO SOLAS+	DW-SHD/SLS	SPRAYHOOD DURO SOLAS	Sprayhood for DURO SOLAS and DURO SOLAS+
Deckvest 5D Size 2 2014 onwards, DURO, Pre 2018 DURO SOLAS	DW-DTS/5D2	CROTCH STRAPS	Legstraps for Deckvest 5D, DURO, Size 2, Pre 2018 DURO SOLAS
Deckvest 5D Size 3 2014 onwards	DW-DTS/5D3	CROTCH STRAPS	Legstraps for Deckvest 5D Size 3 2014 onwards
2009-2011 Deckvest Lifejacket Harness	DW-DTS/D2	CROTCH STRAPS	Crotch strap
2009-2011 Deckvest Lifejacket Harness	DW-DTS/D3	CROTCH STRAPS	Crotch strap
2012 onwards	DW-DTS/L	CROTCH STRAPS	Crotch strap
Deckvest 2007-2008	2007-2008 SG	CROTCH STRAPS	
Deckvest 2008- 2009	2008 ZP	CROTCH STRAPS	
Deckvest 5D 2012 onward	DTS-TGH	THIGH STRAPS	Thigh conversion kit
Fits inside Aero-Pro only	DW-BBP	AERO-PRO BACK PROTECTOR	D30® Impact Protection Back Protector. Certified to exceed the performance requirements of EN1621-2:2014
Can be retrofitted to all Deckvest models and most other brands of lifejacket	DW-LMN	LUME-ON	Lifejacket bladder illumination lights supplied fitted as standard to Deckvest VITO and 6D
Can be retrofitted to Deckvest LITE, LITE+, CENTO, DURO and most other brands of lifejacket	DW-PY/L1	PYLON LIGHT	Compact lifejacket light for complete all-round visibility. Supplied fitted as standard to Deckvest VITO, 6D and Deckvest SOLAS
6D, VITO, LITE+, CENTO	DW-CTR	SAFETY LINE CUTTER	Fast escape accessory for cutting a safety line under load 420 stainless steel blade - wax covered for protection Meets ISAF and ORC recommendations Provides the best protection against the risk of safety line clips becoming unreleasable
MAST-PRO HARNESS	DW-FID	TRIPPING SPIKE	Improved design with shackle key for sizes 5-14mm Sized for snap shackles up to Tylaska T20 Machined in hard anodised alloy Knurled hand grip designed for safe control at high loads Lanyard attachment hole. Shackle pin key slot
6D, SOLAS, SOLAS+, DURO Post-2022	DW-BKL38	Male crotch strap clip	



Pro Sensor ELITE inflator

## UML PRO SENSOR ELITE INFLATOR FOR DECKVEST 6D 170N / 275N, DURO+

The Pro Sensor Elite® Automatic Inflator replaced the Pro Sensor® Automatic Inflator late in 2018: 13mm shorter and 4 grams lighter than the original Pro Sensor® Automatic Inflator. ProSensor Elite units have a Green/Red indicator for the cylinder and auto cartridge

All UML systems use a compressed paper capsule that dissolves in water releasing a spring to puncture the gas cylinder

UML Elite auto caps will not fit other uml units



UML Mk5 Inflator

## UML MK5 AUTOMATIC INFLATOR FOR DECKVEST LITE, LITE+, CENTO, DURO & SOLAS

The cap is designed so that only water flowing upwards through the unit will cause it to activate

Water, spray and rain running downwards will not cause activation

### Benefits

Very reliable

Easy to check and re-arm

3 year replacement date printed on firing cap

UML Rearming kits are inexpensive and stocked by most marine stores

Easy to convert to 'manual firing' only



Halkey Roberts Inflator

## HALKEY ROBERTS PRO HYDRO INFLATOR (DECKVEST LITE USCG ONLY)

### Benefits

Very reliable

Easy to check and re-arm

Splash and humidity resistant

Rearming kits are inexpensive and stocked by most marine stores



Hammar MA1 Inflator

## HAMMAR® INFLATOR HEAD FOR DECKVEST VITO

The Hammar system is activated by water pressure and will not inflate until the cap is approximately 10cm under water

### Benefits

Will not inflate accidentally in very wet conditions

Cylinder is glued to firing head so will not work loose

Cylinder is contained inside the bladder so will not corrode

Single indicator clearly shows if unit is armed

5 year expiry date printed on firing head

<b>DECKVEST VITO</b> <b>ONE SIZE</b> CHEST MEASUREMENT: 60-145cm (23.5-57 inches) WEIGHT: OVER 50KG	<b>DURO</b> <b>ONE SIZE</b> CHEST MEASUREMENT: 60-145cm (23.5-57 inches) WEIGHT: OVER 50KG	<b>ALTO</b> <b>ONE SIZE</b> WAIST MEASUREMENT: 70-145cm (27.5 - 57 inches) WEIGHT: OVER 40KG
<b>DECKVEST 6D</b> <b>ONE SIZE</b> CHEST MEASUREMENT: 60-150cm (23.5-59 inches) WEIGHT: OVER 50KG	<b>DURO SOLAS - DURO SOLAS+</b> <b>ONE SIZE</b> CHEST MEASUREMENT: 60-175cm (23.5-69 inches) WEIGHT: OVER 43KG	<b>DECKVEST CENTO</b> <b>ONE SIZE</b> CHEST MEASUREMENT: 60-90cm (23.5-35.5 inches) WEIGHT: 20-50KG For juniors aged approximately 8-15 years old
<b>DECKVEST LITE &amp; LITE+</b> <b>ONE SIZE</b> CHEST MEASUREMENT: 60-145cm (23.5-57 inches) WEIGHT: OVER 50KG	<b>DURO+</b> <b>ONE SIZE</b> CHEST MEASUREMENT: 60-145cm (23.5-57 inches) WEIGHT: OVER 50KG	<b>DECKVEST NEMO</b> <b>TWO JUNIOR SIZES</b> INFANT UP TO 15KG - CHEST 40-60cm / CHILD 15-30KG - CHEST 45-60cm Aged approximately 2 to 8 years old

PAGE	PRODUCT	WEIGHT
54	Deckvest 6D 170N	1300g (2lb 9oz)
54	Deckvest 6D 275N	1600g (3lb 5oz)
58	Deckvest VITO 170N	1200g (2lb 6oz)
58	Deckvest VITO 275N	1460g (3lbs 2oz)
60	Deckvest LITE	860g (1lb 14.3oz)
63	Deckvest LITE+	860g (1lb 14.3oz)
65	Deckvest LITE USCG	850g (1lb 8oz)
66	Deckvest CENTO	720g (1lb 9.4oz)
69	WING	470g (1lb 0.6oz)
69	FOIL	470g (1lb 0.6oz)
71	ALTO Belt Pack	376g (13.3oz)
73	Waterproof Packs	Small: 25g (0.88oz) Medium: 33g (1.2oz) Large: 57g (2oz)
76	Aero Pro	730g (1lb 9.7oz)
76	Back Protector	264g (9.3oz)
85	DURO 170N	1015g (2lb 3.8oz)
85	DURO 275N	1305g (2lb 14oz)
85	DURO+	1650g (3lb 10.2oz)
79	DURO SOLAS	2002g (4lb 6.6oz)
83	DURO SOLAS +	2005g (4lb 6.7oz)
87	Lume-On™	14g (0.5oz)
87	Pylon™ Light	37g (1.3oz)
88	Safety Lines: DW-STR/03/C	565g (19.93oz)
88	Safety Lines: DW-STR/02E/C	367g (12.95oz)
88	Safety Lines: DW-STR/2LE/C	245g (8.64oz)
88	Safety Lines: DW-STR/3L/C	414g (14.60oz)
89	Kneepads	136g pair (4.8oz)
75	Chest Pack	83g (2.9oz)
75	Belt Pack	80g (2.8oz)
75	Side Pack (including bottle)	160g (5.6oz)
75	Tool Pack	440g (15.5oz)
91	Deck Pro	581g (1lb 4.5oz)
92	Mast Pro	445g (15.6oz)

WING & FOIL				
XS	S	M	L	XL
25-40kg 35N	40-60kg 40N	60-70kg 45N	70kg+ 50N	70kg+ 50N
76-85cm 30-32"	86-96cm 33-37"	97-106cm 38-41"	107-116cm 42-45"	117-132cm 46-52"
Chest Measurement				

AERO-PRO			
	S	M	L
CHEST	86-96cm 33.5-37.5"	97-106cm 38-41.5"	107-116cm 42.5-45.5"
WEIGHT	40-60kg	60-70kg	70+kg
BUOYANCY	40N	45N	50N

KNEE PAD SIZE GUIDE		
SMALL	DW-KPD/1	34-42CM 13½-16½ inches
MEDIUM	DW-KPD/2	40-48CM 15½-18½ inches
LARGE	DW-KPD/3	46-56CM 18-22 inches





**SENSE**  
ENHANCING PERFORMANCE



Simple, soft loop attachment offers fast connection to any application, for quick load measurement

Loads up to 20000kg (44092lbs)

## FEATURES

Actual loads often vary widely from design loads

SENSE range offers teams the ability to quickly and easily confirm actual working loads, refine deck hardware, rope selection, sail choice and even sail trim

Ultra compact and designed to be quickly attached between any two loaded points, be it a fibre rope or hardware

Continuous real time 'Actual' and 'Peak' read out with trend graph

Data displayed on either colour OLED Screen or via the latest wireless connection LE, to a mobile device such as a smart phone, tablet or PC

Peak Load displayed both during and after the session - recorded in the new Load-Sense W mobile device app

Overall accuracy 0.2% over full scale deflection

Rated to IP67, protected against short term immersion in water

Custom units rated up to 50 tonnes available

Attachment loops available: ZS-LOOP/5 and ZS-LOOP/10

Works with free Load Sense App


To discuss your requirements please contact: [spt@spinlock.co.uk](mailto:spt@spinlock.co.uk)



5 Tonne Loop  
ZS-LOOP/5



Model	Description
LWS/5	Load-Sense W - Wireless Sense with wireless read out connection only, 5T maximum mobile load cell (No Display)
LWS/10	Load-Sense W - Wireless Sense with wireless read out connection only, 10T maximum mobile load cell (No Display)
ZS-LOOP/5	5 Tonne Loop
ZS-LOOP/10	10 Tonne Loop

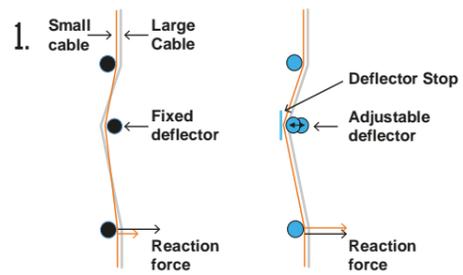

LOOS GAUGE RIG-SENSE

Rig-Sense by Spinlock is a rig tension device for measuring the loads in wire and rope standing rigging used on boats. Cable tension gauges generally operate using the same principle: bend the cable between three points and measure the reactive force on one of those points:

- Mechanically with a spring
- Electronically with strain

Rig-Sense uses a mechanical principle similar to other rig gauges, but with four distinct improvements to achieve the key features

### 1. ADJUSTABLE CABLE DEFLECTOR

Rig-Sense uses an adjustable central deflector, same deflection for all cable sizes. So output does not vary with cable size

The other rig tension gauges have a fixed central deflector which means larger diameter cable will have larger deflection than smaller cable diameter, so output varies with cable size

### 2. MEASUREMENT IN KG

With the Rig-Sense scale, we've kept the scale true, so there is no need for conversion

All cable sizes use the whole scale and work with both imperial and metric cable, fibre and even rope

### 3. PROFILED STAINLESS STEEL DEFLECTORS

Rig-Sense uses large radius stainless steel deflectors which follow the natural bend in cable. This cancels out differences in cable bending stiffness. Tension will measure the same for different sizes and materials

Hard material supports cable over larger area – with no indentation and consistent, repeatable output

### 4. COMPOSITE LEAF SPRING

Rig-Sense uses a composite leaf spring. The advantages are:

- High precision control of spring rate
- Compact shape allows slender design less likely to be damaged
- Cannot over-stretch
- Allows for calibration during assembly
- No corrosion



### FEATURES

Rig Tension gauge for repeatable rig settings - aids race set up and preparation

Measure and set loads on both wire and fibres

Diameter range 2-5mm and 5-8mm

Direct linear scale with tension output

Composite calibrated leaf spring

Stainless steel contact points

Ergonomic robust body

Compact size, durable and light

Easy one-handed operation

Storage bag included

Free App (iOS and Android) see page 102



Model	Description
RGS/0205	Rig Sense 2-5mm Wire/Fibre
RGS/0508	Rig Sense 5-8mm Wire/Fibre

## SPINLOCK SENSE APPS



### LOAD-SENSE W APP

Controls the Wireless Sense unit using the latest wireless connection and displays and records data. Allows tagging of the application detail, Geo-location, test conditions, add images and share and export data for later analysis



### RIG-SENSE APP

Using the Spinlock Rig-Sense tension gauge, you can record data of critical settings to ensure repeatable race settings over differing conditions. Pre-loaded with over 50 tuning guides, users can easily edit the existing class setting or create templates to build new settings. Users can also add images, share and export data for later analysis



**Spinlock**  
BE ADVENTURE-PROOF

**DATA CAPTURE & MANAGEMENT**  
spinlock  
Sense App  
+ Bluetooth

spinlock  
OFFICIAL SUPPLIER  
VOID CLEAN FACE

**PXR CAM CLEAR**  
AVAILABLE IN 2 BITE COLOURS AND 2 SIZES  
MULTIPLE BITE SIZES AVAILABLE  
BOAT SIZE - 20' - 24' (100L - 150L)  
LINE SIZE - 2 - 3mm (100L - 150L)  
LOADS UP TO 20KG (44LBS)

**XAS POWERCLUTCH**

**XAS POWERCLUTCH**

**MARKETING  
MATERIALS**

**spinlock**  
XAS1

**spinlock**  
XAS2

**spinlock**  
PXR

**spinlock**

**spinlock**  
XAS3

**spinlock**

# A GUIDE TO SPINLOCK RESOURCES AVAILABLE TO YOU

Our growing range requires many display options for store and exhibition. We have a new set of displays for the Protect range which offers a complete flexible system of assembly to suit the space and stock being displayed


Displays are also coupled with a wide range of posters, standup graphics and headers, and we are always happy to discuss custom options to suit your display and merchandising needs

**MEDIA PORTAL**  
 Online portal for all resources and technical support from the Spinlock team, including; images, video, social media content, point of sale, brochures, logos, training, weights and press releases - [spinlock.co.uk/portal](http://spinlock.co.uk/portal)

**PRO SUPPORT**  
 Online technical support from the Spinlock team - [prosupport@spinlock.co.uk](mailto:prosupport@spinlock.co.uk)

**CAD LIBRARY**  
 Technical files including drill guides and cad files are available to download from the Cad Library - [spinlock.co.uk/cadlibrary](http://spinlock.co.uk/cadlibrary)

## PROTECT RETAIL GRAPHICS & POSTERS

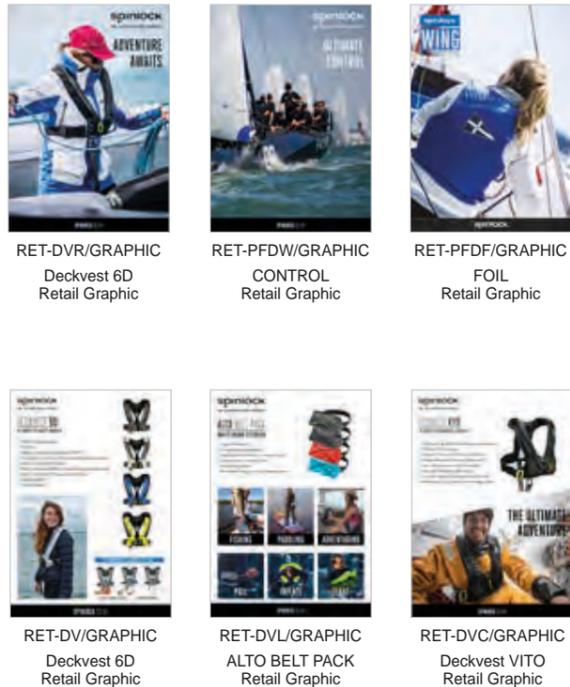

RET-DVR/GRAPHIC  
Deckvest 6D  
Retail Graphic

RET-PFDW/GRAPHIC  
CONTROL  
Retail Graphic

RET-PFDF/GRAPHIC  
FOIL  
Retail Graphic

RET-DV/GRAPHIC  
Deckvest 6D  
Retail Graphic

RET-DVL/GRAPHIC  
ALTO BELT PACK  
Retail Graphic

RET-DVC/GRAPHIC  
Deckvest VITO  
Retail Graphic



See examples of custom headerboards, poster boards and window vinyls, as well as animated GIF, online graphics and artwork for newsletters. Many artwork files are on the Spinlock Portal  
 Contact Spinlock for custom sizes and artwork

# PRODUCT RETAIL DISPLAYS



Model	Description
-------	-------------

Additionally, with these units, customers might order product wire frames of choice:

RET-DW/FRAMEDV	Deckvest 6D frame
RETDW/FRAMEDVL	Deckvest LITE frame
RET-DW/FRAMEFOIL	FOIL frame
RET-DW/FRAMEWING	WING frame
RET-DW/FRAMECENTO	Deckvest CENTO frame
RET-DW/FRAMEMPH	Wire Frame Display Mast Pro Harness
RET-DW/FRAMESFL	Wire Frame Display Safety Lines
RET-DW/FRAMEKNEE	Wire Frame Display Kneepads
RET-DW/FRAMEVT	Deckvest VITO Frame
RET-DW/FRAMEDVL+	Deckvest LITE+ Frame



**RETAIL SLAT WALL DISPLAY**  
RET-WALLO4  
£40.00



**RETAIL SLAT WALL WITH SHELF DISPLAY DISPLAY**  
RET-COMBO4  
£80.00



**PRODUCT WIRE FRAME DISPLAYS FOR SHOP WALLS**



**HIGH LOAD SHELF EXTENSION**  
RET-SHELFH08  
£60.00



**RETAIL ACTIVE SHELF DISPLAY**  
(Includes PXR, XAS & XTS)  
RET-SHELF14  
£40.00



**RETAIL ACTIVE PXR SHELF DISPLAY**  
RET-SHELFPR06  
£20.00


## RETAIL IDEAS

### Retail Gondola Display

The 4 side retail gondola display unit is now available. This display enables the clear and simple display of Spinlock products from both the CONTROL and PROTECT ranges together if necessary, maximising space

The unit has a small footprint measuring 1200mm<sup>2</sup>. The height of the unit measures 1300mm with the option for a removable mannequin or wire frame system to be on top creating more interest and using all available space. It works well in conjunction with the new PROTECT retail displays


Contact Spinlock to discuss requirements

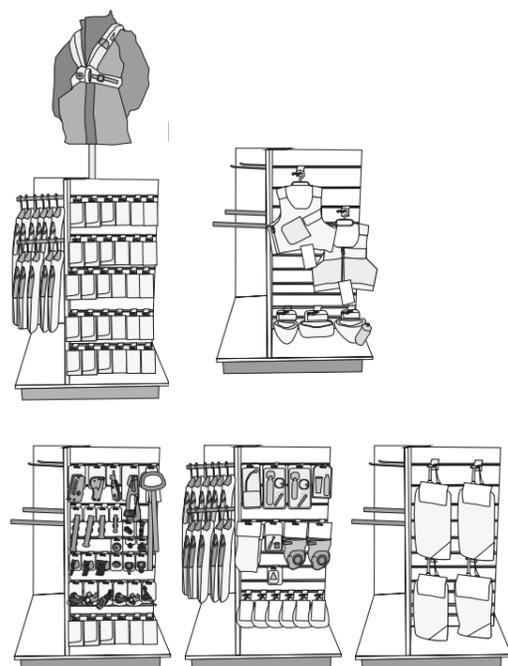

## ALTO RETAIL DISPLAY

### RET-ALTO

Freestanding or wall mountable ALTO display with top graphic. Holds 8 packaged ALTO products on standard retail pegs. Comes with pegs. Order ALTO product separately

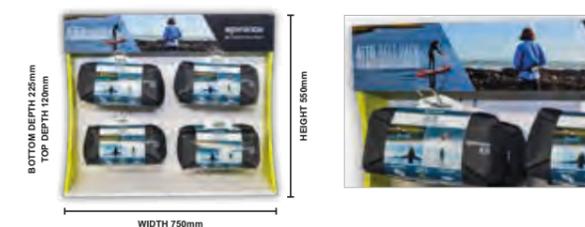

## RETAIL WALL VERTICAL LOGOS

### RET-VLOGO

A logo graphic that hangs vertically to mark the edges of Spinlock products on retail walls or other displays



## TILLER EXTENSION SAMPLE CARD

### RET-TILLER

Hanging card graphic with sample tiller tubes attached demonstrating the colour and finish of the range



## CATEGORY HEADINGS GRAPHIC

RET-WALLHEADER/CONTROL  
RET-WALLHEADER/PROTECT  
RET-WALLHEADER/SENSE



## RETAIL DISPLAY STRIP GRAPHICS

RET-STRIP  
CONTROL PROTECT OR SENSE

A range of strip graphics that sit between standard slat wall channels, these assorted graphics lift and freshen a display. A mix of images for Control, Protect and Sense, the graphics position the Spinlock brand at retail



## RETAIL HANGER WITH GRAPHICS

RET-HANGER GRAPHIC  
CONTROL PROTECT OR SENSE

Available in packs of 6, these retail hooks also have a graphic card with product information and support 6 retail hangers with 6 graphics in the product range of CONTROL and PROTECT



spinlock

PORTAL

- IMAGES
- VIDEOS
- SOCIAL MEDIA CONTENT
- DOCUMENTS
- LOGOS
- TRAINING
- PRODUCT WEIGHTS
- POINT OF SALE

## SOCIAL MEDIA

Category: All

All
Control
Protect
Sense

Select all Download Selected

hello@retailplus.co.uk  
Log Out

## RECENT UPLOADS



The Spinlock Portal is for the use of the marine trade for information not available on our main website

CONTROL, PROTECT and SENSE categories re-ordered and updated

ALTO Orange and Atoll Blue images on Portal with a rear shot of the usage print and 'pull to inflate' print

Deckvest 6D images in Black/Grey are on the Portal

spinlock

PORTAL

- IMAGES
- VIDEOS
- SOCIAL MEDIA CONTENT
- DOCUMENTS
- LOGOS
- TRAINING
- PRODUCT WEIGHTS
- POINT OF SALE

## IMAGES

Category: All

All
Control
Protect
Sense

Select all Download Selected

hello@retailplus.co.uk  
Log Out

## RECENT UPLOADS



The Spinlock Portal is for the use of the marine trade for information not available on our main website

CONTROL, PROTECT and SENSE categories re-ordered and updated

ALTO Orange and Atoll Blue images on Portal with a rear shot of the usage print and 'pull to inflate' print

Deckvest 6D images in Black/Grey are on the Portal

spinlock

PORTAL

-  IMAGES
-  VIDEOS
-  SOCIAL MEDIA CONTENT
-  DOCUMENTS
-  LOGOS
-  TRAINING
-  PRODUCT WEIGHTS
-  POINT OF SALE

Please share the Spinlock Marketing Portal with your network, we are happy for this great resource to be shared with dealers, stores, influencers and many more!

ACCESS EVERYTHING YOU NEED FROM SPINLOCK


POINT OF SALE	
BROCHURES	
LOGOS	
TRAINING	
WEIGHTS	
PRESS RELEASES	

Select all Download Selected

hello@retailplus.co.uk

Log Out

RECENT UPLOADS






The Spinlock Portal is for the use of the marine trade for information not available on our main website

CONTROL, PROTECT and SENSE categories re-ordered and updated

ALTO Orange and Atoll Blue images on Portal with a rear shot of the usage print and 'pull to inflate' print

Deckvest 6D images in Black/Grey are on the Portal

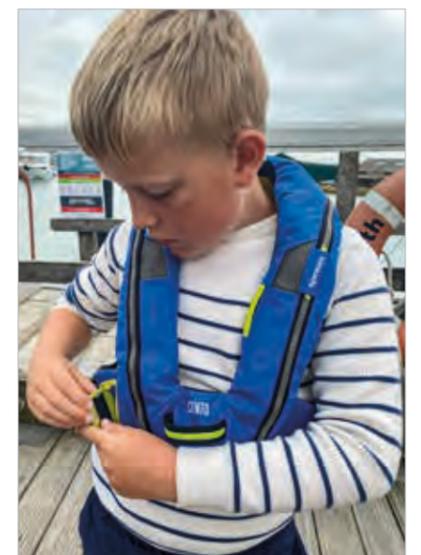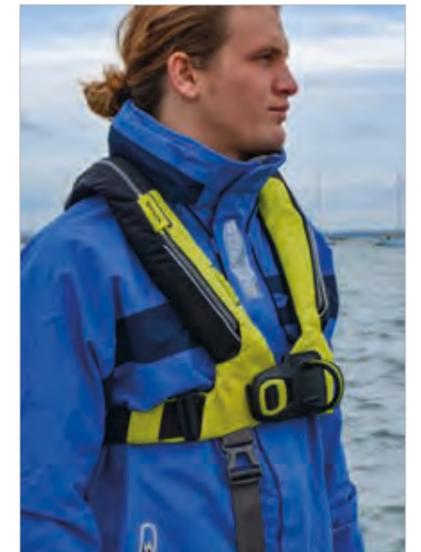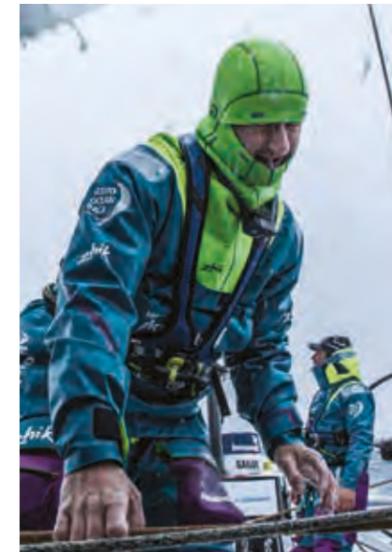

spinlock

PORTAL

-  IMAGES
-  VIDEOS
-  SOCIAL MEDIA CONTENT
-  DOCUMENTS
-  LOGOS
-  TRAINING
-  PRODUCT WEIGHTS
-  POINT OF SALE

VIDEOS

Category: All Control Protect Sense

 Deckvest VITO: Adjusting size	 Rearing repacking	 EAC Carbon explained
 Ceramic parts explained	 Servicing XCS Clutch	 DURO+ features & fit
 MOB1 features & fitting	 Deckvest VITO features & fit	 DURO SOLAS features & fit
 Rig-Sense	 Deckvest 6D features & fit	 DURO features & fit

Select all Download Selected

hello@retailplus.co.uk

Log Out

RECENT UPLOADS



The Spinlock Portal is for the use of the marine trade for information not available on our main website

CONTROL, PROTECT and SENSE categories re-ordered and updated

ALTO Orange and Atoll Blue images on Portal with a rear shot of the usage print and 'pull to inflate' print

Deckvest 6D images in Black/Grey are on the Portal

ENG

